JUNE 1950

TWO SHILLINGS

Wireless World

1384

ELECTRONICS

Radio · Television

JUN 5 1950

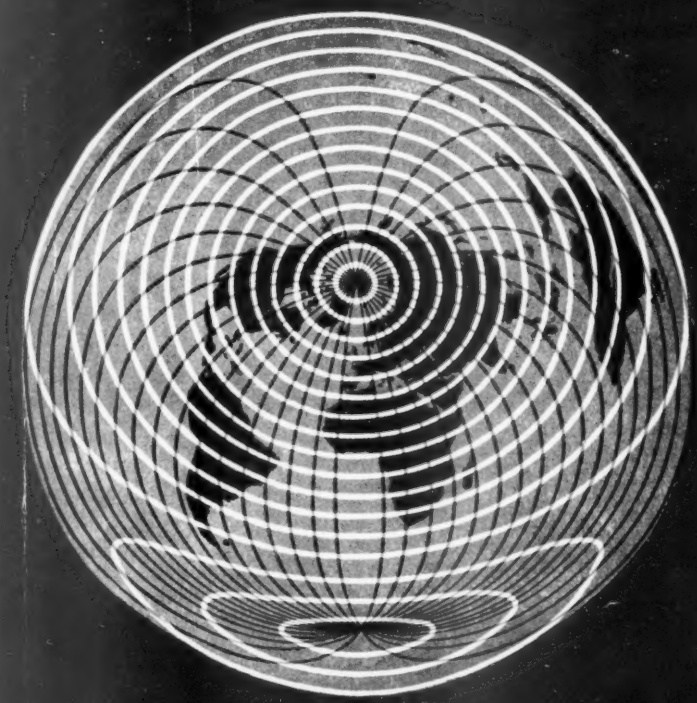

FORTY-EIGHTH YEAR OF PUBLICATION

XUM

3 BIG FACTORS

where small windings are concerned

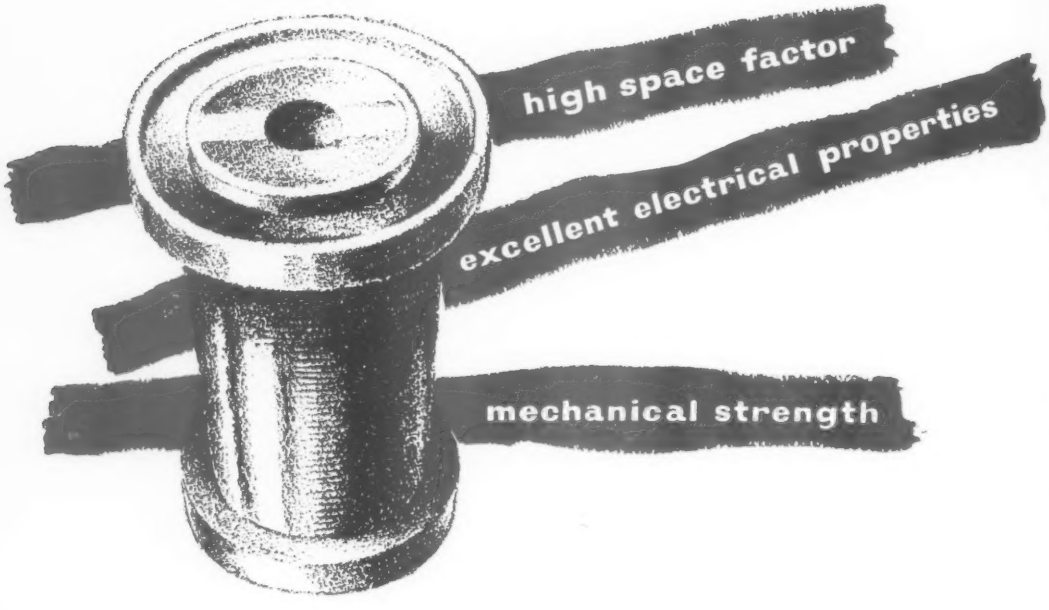

These are three good reasons why BICC Enamelled Winding Wires are ideal for small windings. In addition, coverings are flexible, strongly adhesive to conductors and resistant to heat and damp.

For full details, write for BICC Publication No. 303. We will be glad to send you a copy.

Experienced engineers of the BICC Technical Advisory Service are always ready to assist you in the selection of the right winding wire for your purpose.

1 *Coil for Amplivox miniature magnetic earphone wound with ·001 inch enamelled wire.*



2 *Telephone Relay Coil wound with 6,900 turns of ·0036 inch enamelled wire.*

3 *Field Coil for motor car dynamo wound with 280 turns of ·030 inch enamelled wire.*

BICC

(OIL-BASE) ENAMELLED

Winding Wires

BRITISH INSULATED CALLENDER'S CABLES LIMITED

21 Bloomsbury Street, London, W.C.1

AVOMETERS CROSSED ANTARCTICA

WITH THE BRITISH TRANS-ANTARCTIC EXPEDITION

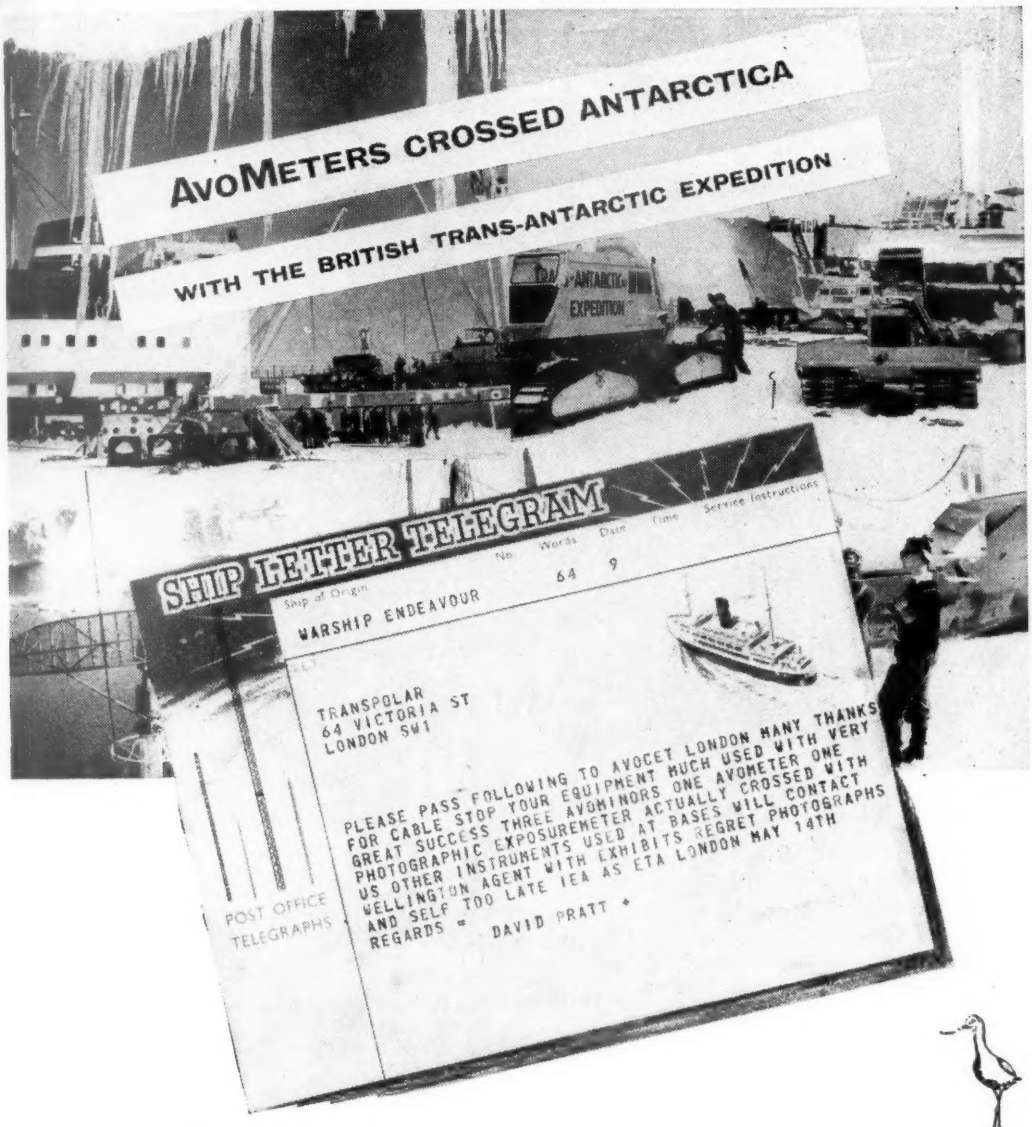
SHIP LETTER TELEGRAM
Ship of Origin
No. Words Date Time Service Instructions
WARSHIP ENDEAVOUR 64 9
TRANSPOLAR
64 VICTORIA ST
LONDON SW1
PLEASE PASS FOLLOWING TO AVOCET LONDON MANY THANKS FOR CABLE STOP YOUR EQUIPMENT MUCH USED WITH VERY GREAT SUCCESS THREE AVOMINORS ONE AVOMETER ONE PHOTOGRAPHIC EXPOSUREMETER ACTUALLY CROSSED WITH US OTHER INSTRUMENTS USED AT BASES WILL CONTACT WELLINGTON AGENT WITH EXHIBITS REGRET PHOTOGRAPHS AND SELF TOO LATE IEA AS ETA LONDON MAY 14TH
REGARDS = DAVID PRATT +
POST OFFICE TELEGRAPHS

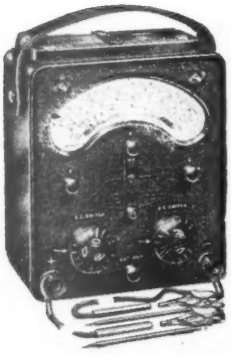

. . . and the AVO Instruments carried were identical in every way to the normal commercial models that are available to service engineers everywhere.

AVO LTD

AVOCET HOUSE · 92-96, VAUXHALL BRIDGE ROAD · LONDON · S.W.1.

Telephone: VICtoria 3404 (9 lines)

Manufacturers of:— ELECTRICAL, ELECTRONIC & NUCLEONIC INSTRUMENTS DOUGLAS & MACADIE COIL WINDING MACHINES

G.17

A

let us demonstrate any of these superb SOLARTRON oscilloscopes

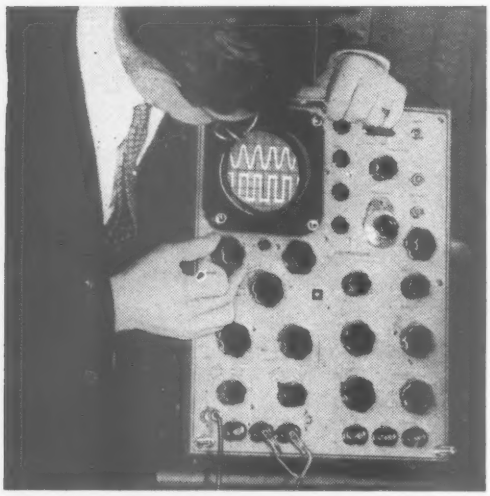

Have you seen the ***new*** Solartron Double-Beam Solarscope CD 711 being put through its paces?
Now, for the first time, you can choose a double-beam 'scope of Solartron quality, embodying all the latest design features and built to the finest standards of electronic and mechanical engineering.
Why not write or call us now for a demonstration of the Double-Beam Solarscope, or any of the eight other models listed below? Specialist instrument engineers are immediately available to assist you, whatever your problem or field of application.

	CD 711 DOUBLE BEAM
BANDWIDTH	Max. D.C.—7 Mc/s. at 100mV/cm.
SENSITIVITY	3mV/cm.—100 V/cm.
'Y' CALIBRATION	Cal. shift. Accuracy ±5%
'X' CALIBRATION	Cal. time scale. Accuracy ±5%
TIME BASE	Time scale 0.3μSec./cm.—3 Sec./cm.
'X' EXPANSION	Continuously variable ×10
SIZE & WEIGHT	16″ × 13″ × 27½″ deep. 110 lb.

	CD 715	AD 557	CD 518	CD 568	CD 513
BANDWIDTH	Max. D.C.—20 Kc/s.	Max. D.C.—1 Mc/s.	Max. D.C.—5 Mc/s.	Max. D.C.—5 Mc/s.	Max. D.C.—10 Mc/s.
SENSITIVITY	10 mV/cm.—10V/cm.	3 mV/cm.—100 V/cm.	0.25 V/cm.—5 V/cm.	0.25 V/cm.—5 V/cm.	1 mV/cm.—10 V/cm.
'Y' CALIBRATION	Special facilities	Cal. shift ±5%	Shift meter. Accuracy ±3%	Shift meter. Accuracy ±3%	Cal. sensitivity Accuracy ±10%
'X' CALIBRATION	Special facilities	Cal. time scale. Accuracy ±10%	'Cal Pips' and sine wave. Accuracy ±2%	Sine wave. Accuracy ±2%	Cal. time scale Accuracy ±10%
TIME BASE	Sweep time 10 Sec. to 0.1 Sec.	Time scale 1μSec./cm.—1 Sec./cm.	Sweep time 100m. Sec.—1μSec.	Sweep time 100m. Sec.—1μSec.	Time scale 0.1μSec./cm.—1 Sec./cm.
'X' EXPANSION	×1, ×0.5, ×0.2, ×0.1, ×0.05	Continuously variable × 10			×0.5, ×1, ×2, ×5
SIZE & WEIGHT	14″ × 10″ × 20″ deep. 47 lb.	16½″ × 10″ × 22″ deep. 70 lb.	12″ × 9″ × 18″ deep. 40 lb.	12″ × 9″ × 18″ deep. 40 lb.	16½″ × 10″ × 22″ deep. 70 lb.

	CD 523S	CD 814	CD 643
BANDWIDTH	Max. D.C.—10 Mc/s.	Constant 1c/s.–9Mc/s.	Constant D.C.—15 Mc/s.
SENSITIVITY	1 mV/cm.—10 V/cm.	30 mV/cm.—30 V/cm.	100 mV/cm.–60 V/cm.
'Y' CALIBRATION	Cal. sensitivity Accuracy ±10%	Comparison method Accuracy±5%	Cal. shift. Accuracy ±2%
'X' CALIBRATION	Cal. time scale Accuracy ±10%	'Cal Pips' Accuracy ±5%	'Cal Pips'and brightup Accuracy ±2%
TIME BASE	Time scale 0.1μSec./cm.—1 Sec./cm.	Repetition Rate 6 c/s—185 Kc/s.	Time scale 0.1μSec/cm.—100m. Sec./cm.
'X' EXPANSION	× 0.5, × 1, × 2, × 5	Continuously variable × 10	Continuously variable × 100
SIZE & WEIGHT	16½″ × 10″ × 23″ deep. 70 lb.	14¼″ × 10½″ × 19½″ deep. 43 lb.	20″ × 14¼″ × 27¾″ deep. 140 lb.

PRICES
Home & Export (F.O.B., packing extra)

CD 711	£320
CD 715	£460
AD 557	£275
CD 518	£225
CD 568	£210
CD 513	£220
CD 523S	£265
CD 814	£115
CD 643	£490

write or 'phone now for appointment

THE SOLARTRON ELECTRONIC GROUP LIMITED

THAMES DITTON • SURREY • Telephone: EMBerbrook 5522 • Cables: Solartron, Thames Ditton

a new valve for 470 Mc/s equipment

— unique double tetrode range extended

QQVO2-6

Here is a new six watt double tetrode for low cost 470Mc/s mobile equipment. This compact valve features a frame grid and the same unique twin construction as other Mullard double tetrodes—a construction which provides high efficiencies, high power gain and heater economy.

Other features of the QQVO2-6 include built-in neutralising capacitors which enable circuitry to be simplified, and low inter-electrode capacitances which allow wide tuning ranges to be achieved and which contribute to high efficiency.

Write to the address below for full details of the QQVO2-6 and other Mullard double tetrodes.

BASE	B9A
CATHODE	Indirectly heated
HEATER (Centre tapped)	
Series	12.6V, 0.3A
Parallel	6.3V, 0.6A

CAPACITANCES

*ca–g′ (each section)	less than 0.16pF
cg′–all (each section)	6.4 pF
ca–all (each section)	1.6 pF
cout (two sections in push-pull)	0.95 pF
cin (two sections in push-pull)	3.8 pF

* Internally neutralised for push-pull operation.

CHARACTERISTICS

(each section) measured at Ia = 25mA, Va = Vg″ = 150V.

gm	10.5mA/V
μg′–g″	31

TYPICAL OPERATING CONDITIONS

	Telegraphy or F.M.	Telephony—A.M.	
f	470	470	Mc/s
Va	180	180	V
Vg2	180	180	V
Ia	2 x 27.5	2 x 20	mA
pa	2 x 2.1	2 x 1.5	W
Pout	5.8	4.2	W
Pload	4.5	3.4	W

THE MULLARD DOUBLE TETRODE RANGE

. . . . the most comprehensive and efficient in the world

	Typical F.M., Power Output
QQVO2–6	5.8 watts
QQVO3–10/6360 (CV2798)	11 watts
QQVO3–20A/6252 (CV2799)	25 watts
QQVO6–40A/5894 (CV2797)	56 watts

Mullard

COMMUNICATIONS AND INDUSTRIAL VALVE DEPARTMENT

MULLARD LIMITED · MULLARD HOUSE
TORRINGTON PLACE · W.C.1 · Tel: LANgham 6633

MVT. 343a

3 of the valves included in the comprehensive G.E.C. range

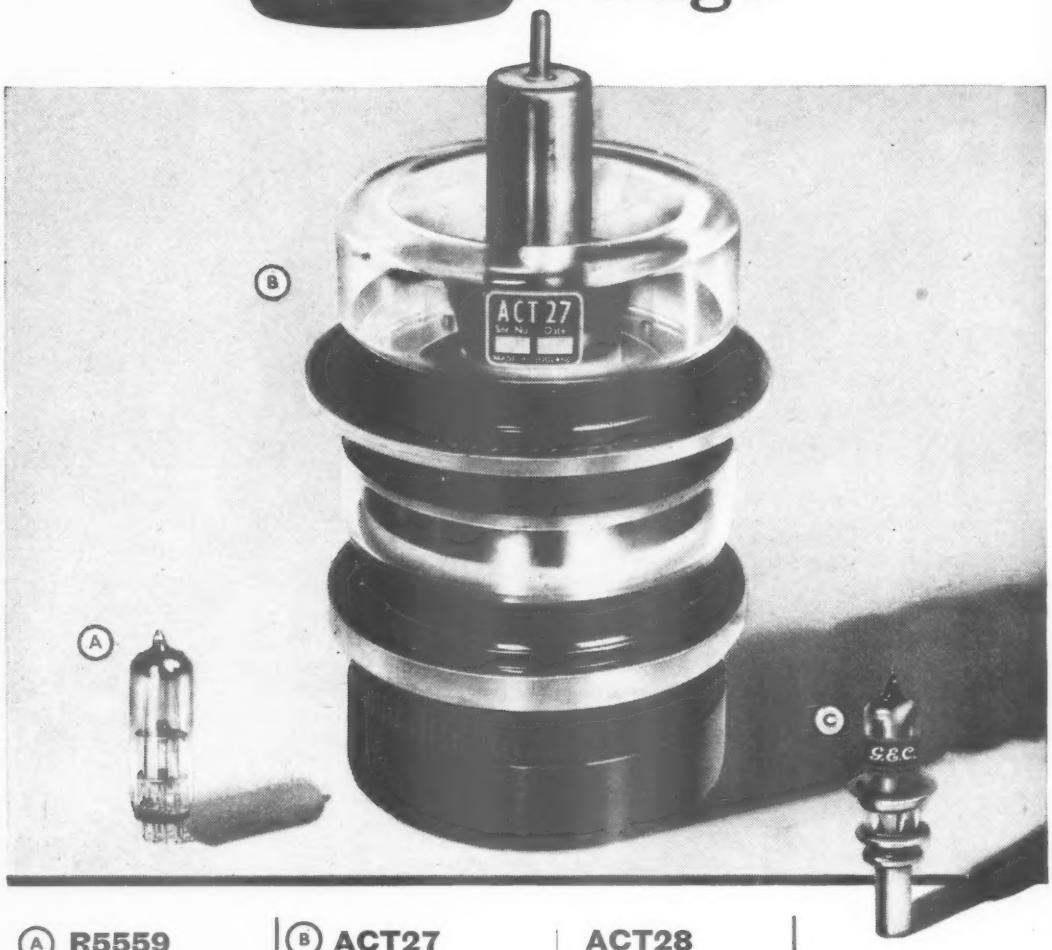

(A) R5559

A low-noise VIDEO FREQUENCY TRIODE. Equivalent noise resistance 145Ω, μ 40, g_m 25mA/V.

(B) ACT27

A forced-air-cooled disc seal POWER TRIODE useful up to 600Mc/s and operating at relatively low voltage. Typical operating conditions at 300 Mc/s: V_a 1.5 kV, P_{out} 1.1kW.

ACT28

A similar valve to the ACT27, but intended for PULSE OPERATION V_a (pk) (max) 11kV, p_a (max) 1.5kW, Max. pulse length 5μs.

(C) DET29

A disc seal MICROWAVE TRIODE useful up to about 7000Mc/s: V_a 250V, p_a (max) 10W.

Products of
THE M-O VALVE COMPANY LIMITED, BROOK GREEN, HAMMERSMITH, LONDON, W.6.
A subsidiary of THE GENERAL ELECTRIC CO. LTD.

INCREMENTAL INDUCTANCE BRIDGE

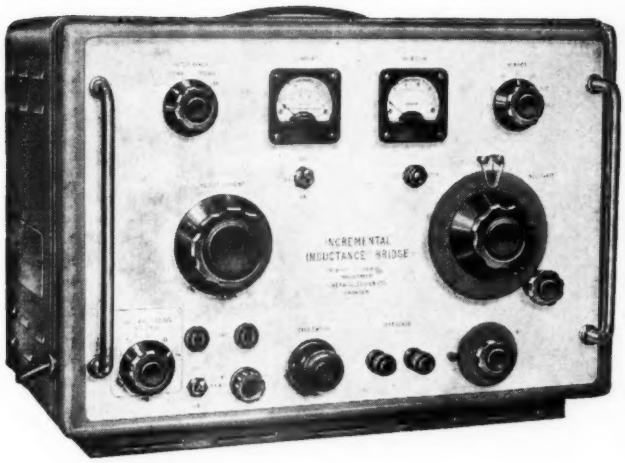

Designed to measure the value of iron cored chokes and similar inductors in the range 0·01H to 1000H of Q value not less than 2.

Provision is made for passing any current up to 1 Amp d.c. through the winding and selectable a.c. excitation voltages of 1, 2, 5, 10 and 20V r.m.s. are provided.

Full technical information is available on request.

CINEMA TELEVISION LTD

A COMPANY WITHIN THE RANK ORGANISATION LIMITED

WORSLEY BRIDGE ROAD · LONDON · S.E.26
HITHER GREEN 4600

SALES AND SERVICING AGENTS:
Hawnt & Co. Ltd., 59 Moor Street, Birmingham 4
McKellen Automation Ltd., 122 Seymour Grove, Old Trafford, Manchester 16
Atkins Robertson & Whiteford Ltd., Industrial Estate, Thornliebank, Glasgow

ELECTRO METHODS LTD OF STEVENAGE

BRITAIN'S FOREMOST DESIGNERS

AND MANUFACTURERS OF

LOW-INERTIA MOTORS AND TACHO GENERATORS



LOW-INERTIA MOTORS

- Linear voltage/speed characteristic
- Starting power: 6 microwatts
- Permanent magnet
- Nom voltages: 1.5, 6, 12 and 24 v. d.c.

D.C. TACHO GENERATOR

- Linear voltage/speed characteristic
- Compact design for standard fixing
- Synchros size 11, grade 2
- Output voltage: 5.75 per 1,000 r.p.m.

ELECTRO-METHODS LTD. 12-36 CAXTON WAY, STEVENAGE, HERTS. Phone: STEVENAGE 780

Cover without query

Designed by Hinchley to ensure thorough inspection. You can fit this shell without disturbing the wiring to the voltage selector, leaving no danger of unseen trouble spots. This is just another example of how a good component manufacturer works ceaselessly to ensure the greater reliability of his products. Our service is as close to you as your telephone, and we can help you by being brought into the picture at the outset of your design. Why not contact us?

Take a close look at the quality of

Hinchley TRANSFORMERS

HINCHLEY ENGINEERING COMPANY LIMITED, PANS LANE, DEVIZES, WILTS. Phone: DEVIZES 573/5

A NEW RANGE OF
"Miniature" Instruments

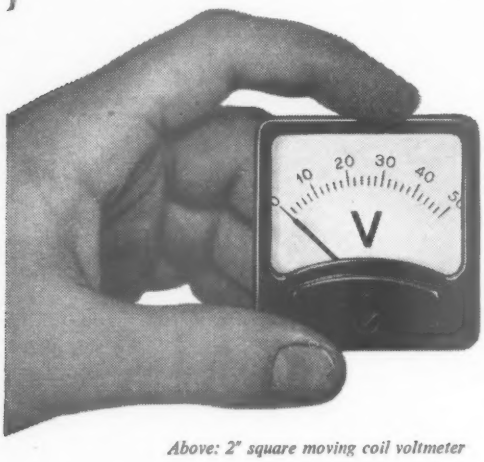

Above: 2" square moving coil voltmeter

★ **DESIGNED TO HARMONISE WITH ALL MODERN ELECTRONIC EQUIPMENT**

★ **FIXINGS CONFORM TO ACCEPTED PRACTICE**

★ **PRICES ARE HIGHLY COMPETITIVE**

For utmost reliability all 'ENGLISH ELECTRIC' miniature instruments have been designed with a higher-than-normal torque/weight ratio in combination with lower power consumption. All types have been successfully subjected to the following tests:

RESISTANCE TO IMPACT SHOCK OF 200g in any plane.

VIBRATION FATIGUE TEST—two million cycles at peak resonant frequency.

OSCILLATORY TEST—up to one million operations.

SPECIFICATIONS B.S. 89–1954 and other International Specifications.

TYPES

Moving coil for D.C. applications.
Rectifier moving coil for A.F. applications.
Thermo-couple operated moving coil for R.F. applications.

SIZES

Square: 2", 2½" and 3½" nominal scale length.
Round: 2½" and 3½" nominal scale length.
Rectangular: 5" x 6" or 3" x 4" nominal case size.

Design registrations pending.

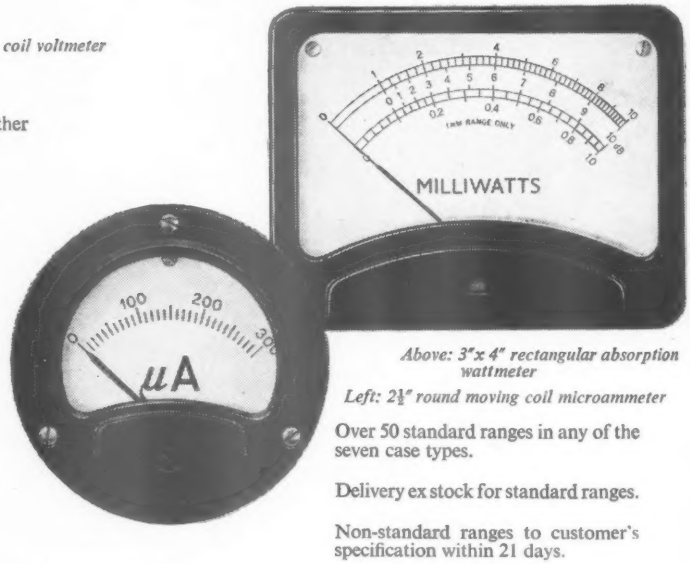

Above: 3"x 4" rectangular absorption wattmeter

Left: 2½" round moving coil microammeter

Over 50 standard ranges in any of the seven case types.

Delivery ex stock for standard ranges.

Non-standard ranges to customer's specification within 21 days.

Literature available on request to The ENGLISH ELECTRIC Co. Ltd., Instrument Department, Stafford.

'ENGLISH ELECTRIC'

THE ENGLISH ELECTRIC COMPANY LIMITED, MARCONI HOUSE, STRAND, LONDON, W.C.2

Meter, Relay and Instrument Division, Stafford

WORKS: STAFFORD · PRESTON · RUGBY · BRADFORD · LIVERPOOL · ACCRINGTON

EE.43C8

The Connectors and Rotary Transformers produced for many years by our Associate Company, Power Controls Limited, will in future be manufactured and marketed by ourselves. This, from our customers point of view is simply a change in name.

Improved cable clamps on the new range of our Miniature Hermetically Sealed Co-axial Plugs and Sockets will withstand a pull of up to 35 lbs., and are suitable for use with Uniradio 70 cable.

They have been developed and Type Approved to Inter-Service Requirement under R.C.S. 322 and are freely interchangeable with the types which they supersede.

The new types are hermetically sealed and 100% production tested. Sealing caps are available for uncoupled units.

MAGNETIC DEVICES LIMITED

MAGNETIC DEVICES LIMITED

A. I. D. & A. R. B.—Approved

Exning Road, Newmarket, Suffolk

Phone: Newmarket 3181/2/3. Grams: Magnetic Newmarket.

HD 23A



BREAKDOWN TESTER MODEL RM 215E

Output Voltage: 0 to 10,000 V D.C. 5 mA. Max.
and 0 to 5,000 V A.C. 10 mA. Max

Accurate –reliable!

MEGOHMMETER
MODEL RM 175 — LZ MK II

Resistance Range: 0.9 Megohm to 10,000,000 Megohms.

Test Pressure: Continuously variable from 10 to 1,000 V D.C.

BPL

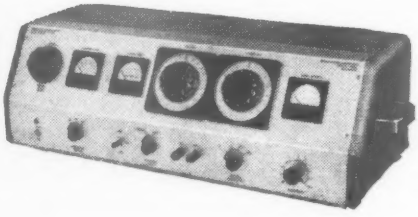

ELECTROLYTIC & TANTALUM
CONDENSER BRIDGE MODEL CB 154D

Capacity Range: 0.1 mFd to 11,000 mFds.

Power Factor Range: 0.4% to 60%.

Polarising Voltage: 0 to 800 volts in 5 ranges

Leakage Current: 0/50 uA, 0/500 uA, 0/5 mA, 0/50 mA.

Ask for demonstration

BRITISH PHYSICAL LABORATORIES

RADLETT · HERTS
ENGLAND

TELEPHONE · RADLETT 5674

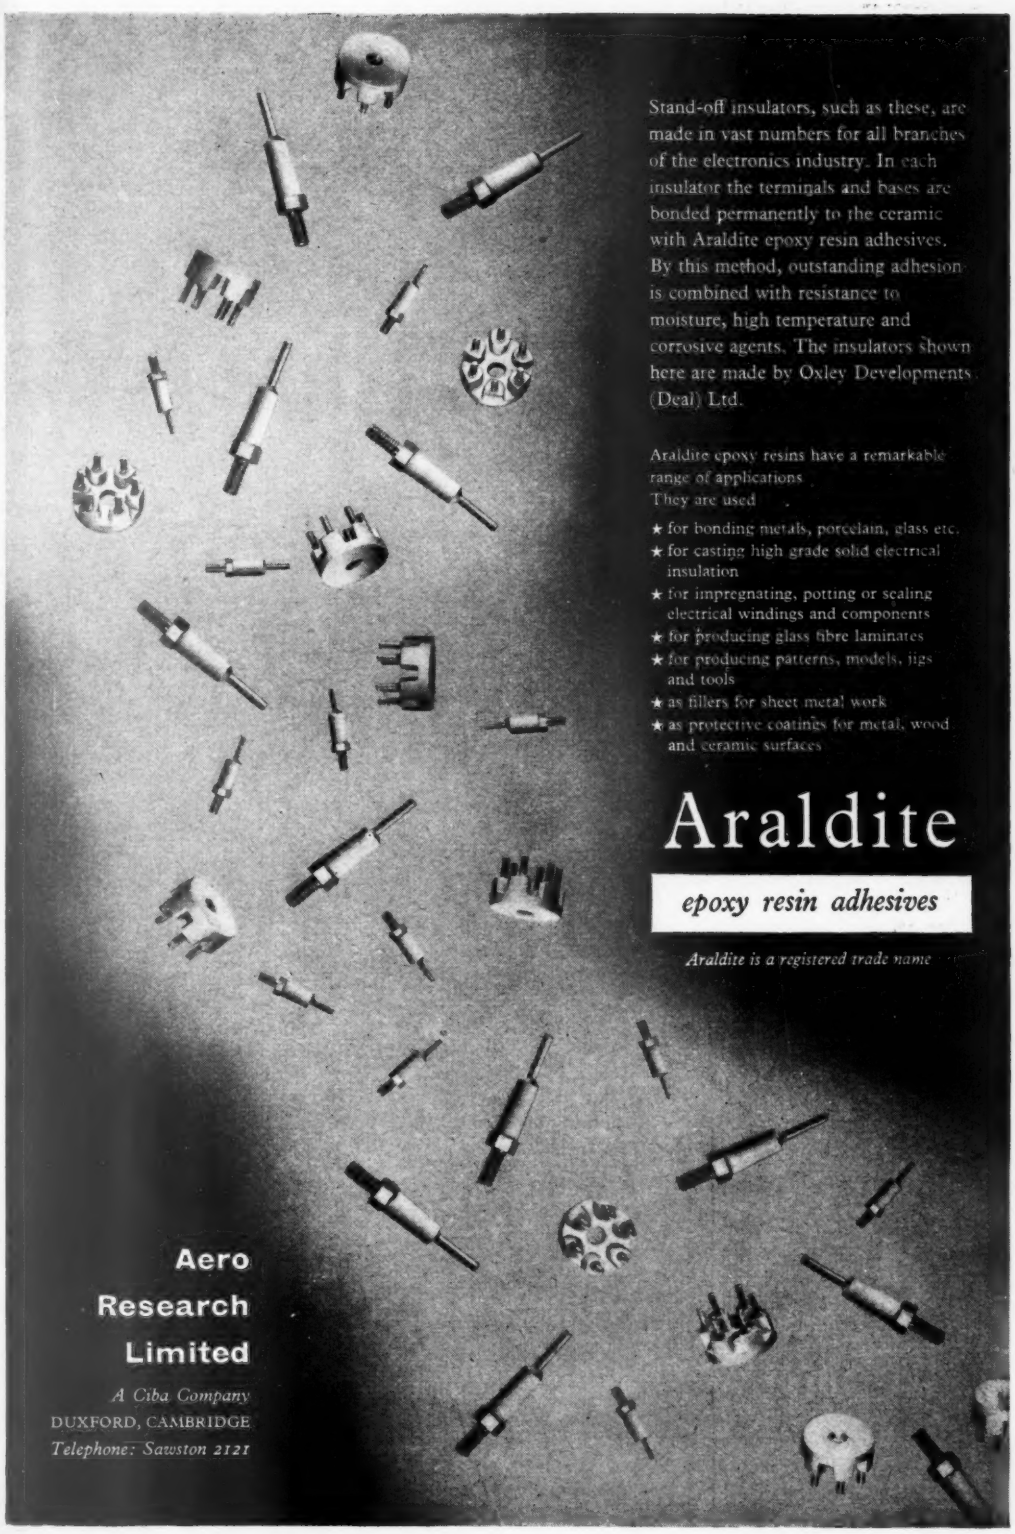

Stand-off insulators, such as these, are made in vast numbers for all branches of the electronics industry. In each insulator the terminals and bases are bonded permanently to the ceramic with Araldite epoxy resin adhesives. By this method, outstanding adhesion is combined with resistance to moisture, high temperature and corrosive agents. The insulators shown here are made by Oxley Developments (Deal) Ltd.

Araldite epoxy resins have a remarkable range of applications. They are used

- ★ for bonding metals, porcelain, glass etc.
- ★ for casting high grade solid electrical insulation
- ★ for impregnating, potting or sealing electrical windings and components
- ★ for producing glass fibre laminates
- ★ for producing patterns, models, jigs and tools
- ★ as fillers for sheet metal work
- ★ as protective coatings for metal, wood and ceramic surfaces

Araldite

epoxy resin adhesives

Araldite is a registered trade name

Aero Research Limited

A Ciba Company
DUXFORD, CAMBRIDGE
Telephone: Sawston 2121

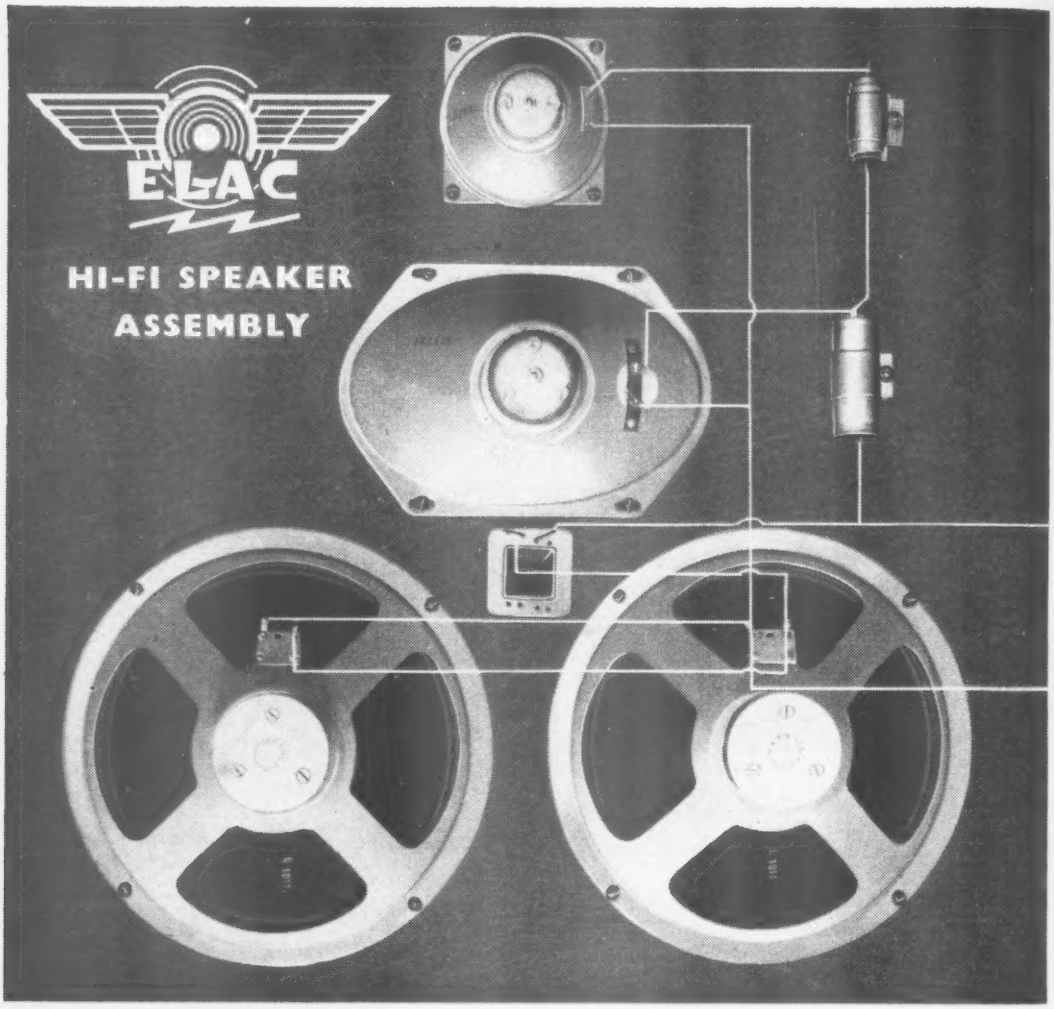

Now ELAC *bring* QUALITY HI-FI *within the reach of everyone*

This new Elac combination comprises four acoustically matched high fidelity loudspeakers.
An outstanding feature is its high sensitivity which is of considerable value when used with low power amplifiers.
Full descriptive details of a suitable enclosure together with a point-to-point wiring diagram are included with each pack.
Two packs are available—types HFP/1 and HFP/2 for 7.5 ohm. and 15 ohm. systems respectively.
True high fidelity reproduction will be experienced with this economically designed combination at a cost considerably less than other systems.
Frequency response: 40 cycles—17,000 cycles. Power handling: 12 watts.

PRICE COMPLETE **£7. 11. 6**
P. Tax £2. 13. 10

ELECTRO ACOUSTIC INDUSTRIES LTD., Stamford Works, Broad Lane, Tottenham, N.15. Telephone: TOT 0505/9

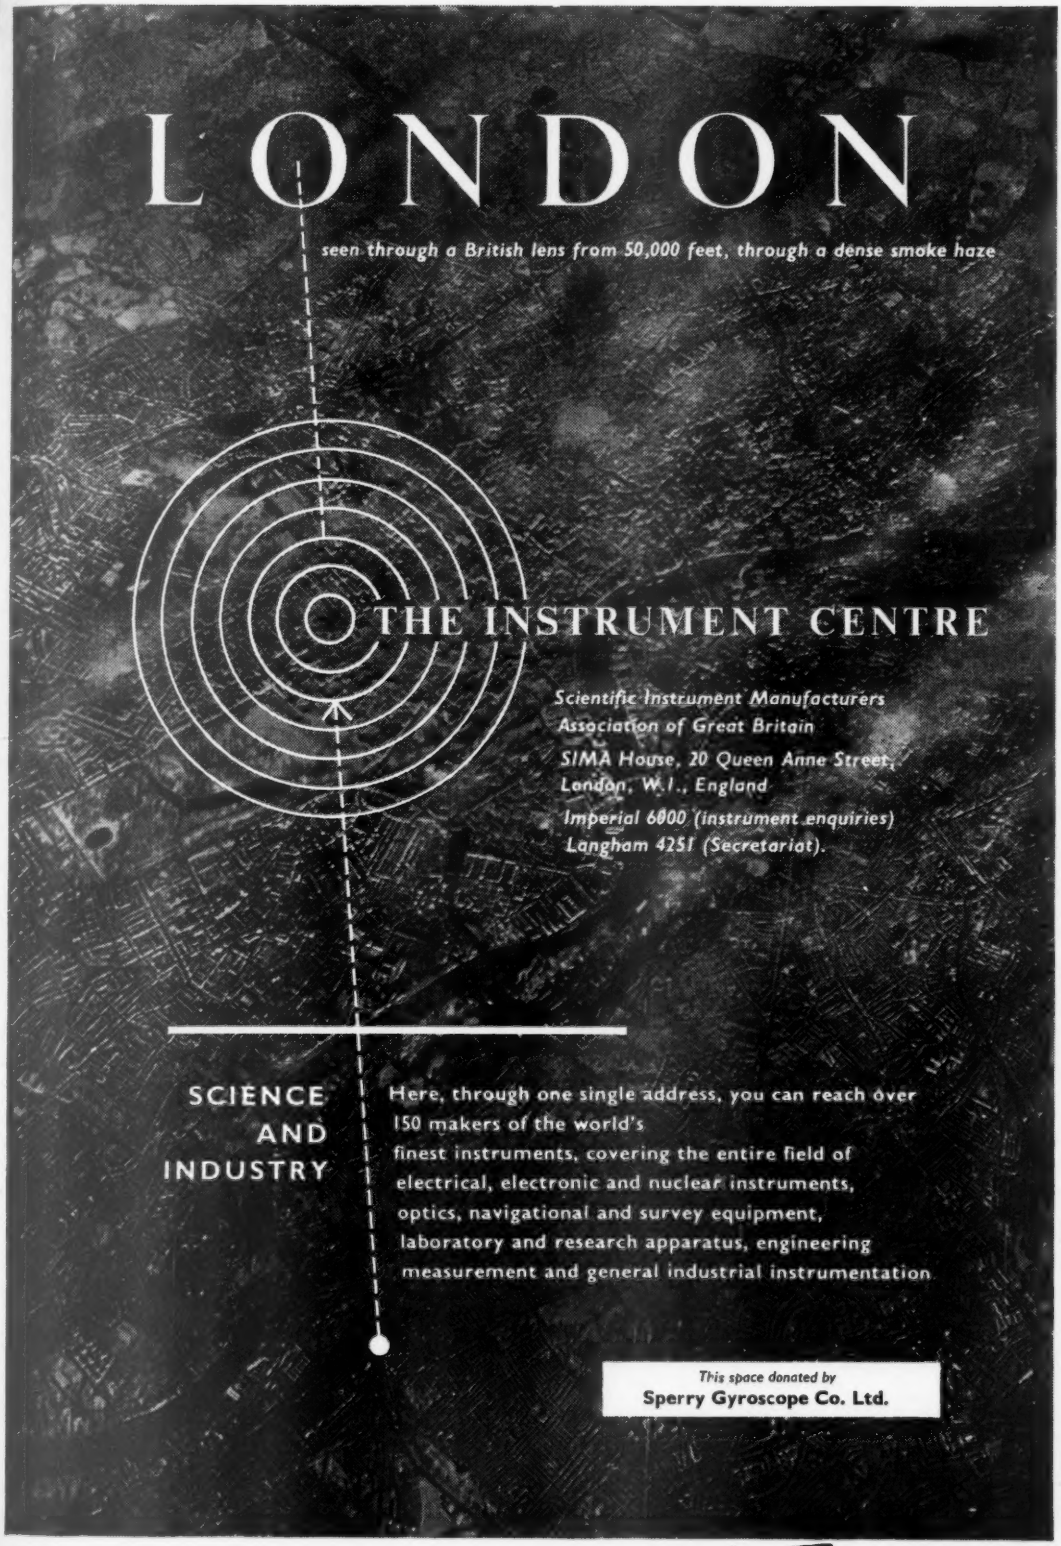
LONDON
seen through a British lens from 50,000 feet, through a dense smoke haze
THE INSTRUMENT CENTRE
Scientific Instrument Manufacturers Association of Great Britain
SIMA House, 20 Queen Anne Street, London, W.1., England
Imperial 6000 (instrument enquiries)
Langham 4251 (Secretariat).
SCIENCE AND INDUSTRY
Here, through one single address, you can reach over 150 makers of the world's finest instruments, covering the entire field of electrical, electronic and nuclear instruments, optics, navigational and survey equipment, laboratory and research apparatus, engineering measurement and general industrial instrumentation
This space donated by
Sperry Gyroscope Co. Ltd.

55 volts— *a really low* voltage stabiliser

type
G55/1K

MECHANICAL DATA

Maximum overall length	66.7	mm
Maximum seated height	60.3	mm
Maximum diameter	19.1	mm
Base	B7G	
Net weight	8.5	g

CHARACTERISTICS

Maximum striking voltage	90	V
Stabilising voltage	55	V
D.C. operating current	2 to 30	mA
Maximum peak current (10 seconds max.)	75	mA
Nominal regulation 2 to 30 mA	3	V
Maximum regulation 2 to 30 mA	5	V
Ambient temperature range	−55 to +90	°C

The G55/1K is a miniature cold-cathode, gas-filled, voltage stabiliser for use in industrial and radio equipment where a stable source of voltage is required. The outstanding feature of this valve is the low maintaining voltage of 55 volts.

data sheet available from:

Standard Telephones and Cables Limited
SPECIAL VALVE SALES DEPARTMENT
CONNAUGHT HOUSE · 63 ALDWYCH · LONDON W.C.2

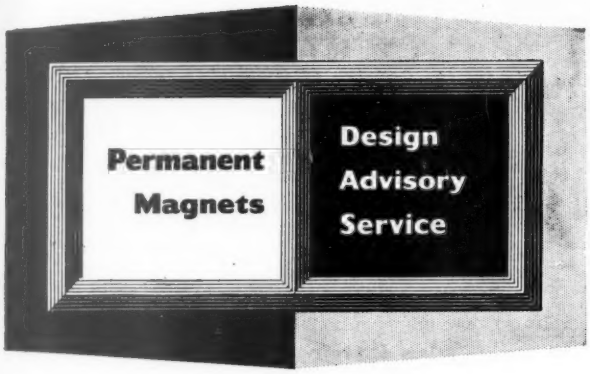

No. 3

Circuit Design Recommendations

Advertisements in this series deal with general design considerations. If you require more specific information on the use of permanent magnets, please send your enquiry to the address below, mentioning the Design Advisory Service.

This summary provides designers with a series of recommendations to assist them in achieving the best results from permanent magnets:

1. The principle of efficient magnetic design is for the magnet to operate at (BH) max. To achieve this the magnet should normally be magnetised in position after assembly.
2. If the magnet or the assembly is designed to be placed close to ferromagnetic parts or structures, adequate allowance should be made on the cross-sectional area of the magnet to compensate for the high leakage flux that will result.
3. The design of the magnetic circuit should ensure that the permanent magnet is not used as a structural member. In general, magnets are brittle and fracture easily; they should, therefore, be held securely.
4. Ways of fixing magnets are limited. Those recommended are: (*a*) by clamping the magnet between ferrous pole pieces with a non-magnetic screw; (*b*) by cementing to the pole pieces with a resin adhesive. In some instances the magnet can be supplied with tapped inserts.
5. The widest possible manufacturing tolerances should be allowed in design. Grinding on the magnet should be restricted to the pole faces.
6. The drilling of the hard and brittle modern metallic and ceramic magnets is impracticable. Silver soldering, brazing or welding are unsuitable as the temperatures involved will partially destroy the magnetic properties.
7. Usually, the plating of magnets is not entirely satisfactory. Where a finish is required for protection or appearance, a stove enamel is preferable to plating or other methods.
8. The safe temperature range in which magnets may operate varies according to the type of material. 'Ticonal' G for example, has a cyclic temperature coefficient of −0.02% per °C under operating conditions over a range between −70°C to +300°C.

If you wish to receive reprints of this advertisement and others in this series write to the address below.

Mullard

'TICONAL' PERMANENT MAGNETS
'MAGNADUR' CERAMIC MAGNETS
FERROXCUBE MAGNETIC CORES

MULLARD LIMITED, COMPONENT DIVISION, MULLARD HOUSE, TORRINGTON PLACE, W.C.1. Tel: LANgham 6633
MC261A

if it's signal 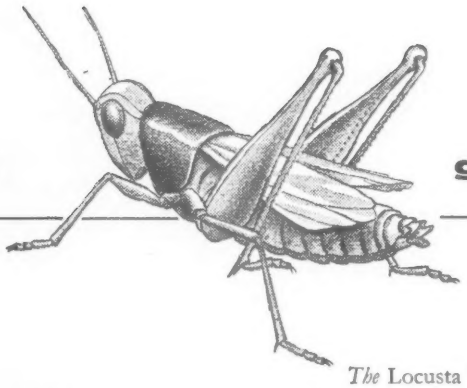 **generation**

in the **audio** range

The Locusta Viridissima *(Grasshoppers to you!) produce notes ranging from 6K into inaudibility. Signals with infinite acceleration, output is virtually square wave. As to dynes/cm.—it all depends—male or female—mating season or not!*

Advance **– to be sure!**



TYPE H1
SIGNAL GENERATOR
Frequency Range
15 c/s to 50 kc/s
Output
sine wave
200 μV to 20 V
square wave
400 μV to 40 V

List price **£32** in U.K.

Leaflet Number W/41



TYPE J1
SIGNAL GENERATOR
Frequency Range
15 c/s to 50 kc/s
Output
0·1mW to 1 W
(0·25V-25V)
Output Impedance
600 or 5 ohms

List price **£40** in U.K.

Leaflet Number W/33



TYPE J2
SIGNAL GENERATOR
Frequency Range
15 c/s to 50 kc/s
Output
0·1mW to 1 W
(0·25V-25V)
Output Impedance
600 or 5 ohms
with output voltage meter

List price **£50** in U.K.

Leaflet Number W/33

Advance
COMPONENTS
LIMITED
ROEBUCK ROAD
HAINAULT
ILFORD ESSEX
PHONE HAINAULT 6688

C-D 50

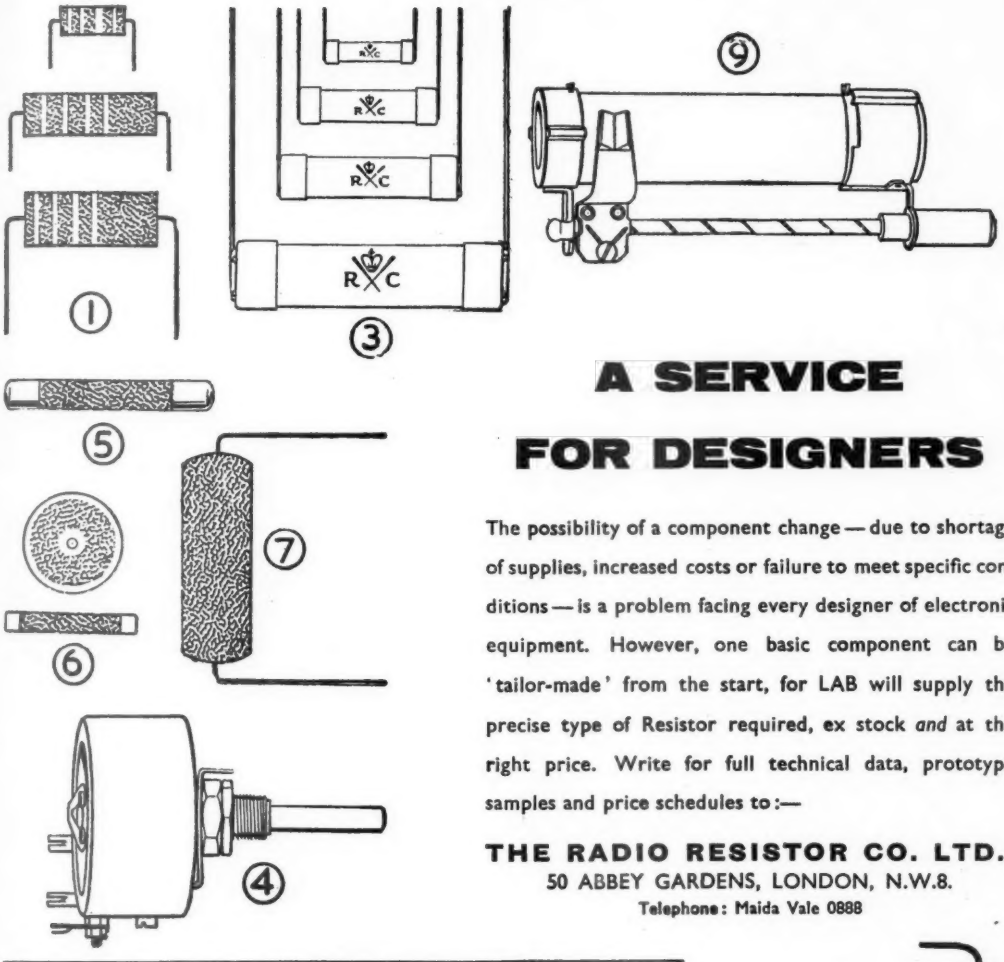

A SERVICE FOR DESIGNERS

The possibility of a component change — due to shortage of supplies, increased costs or failure to meet specific conditions — is a problem facing every designer of electronic equipment. However, one basic component can be 'tailor-made' from the start, for LAB will supply the precise type of Resistor required, ex stock *and* at the right price. Write for full technical data, prototype samples and price schedules to:—

THE RADIO RESISTOR CO. LTD.,
50 ABBEY GARDENS, LONDON, N.W.8.
Telephone: Maida Vale 0888

CARBON	WATTS	OHMIC RANGE	TOLERANCES ±
1. Solid	⅛ 1 & 2	10—10M	5% & 10%
2. Cracked	1/30—20	1—500M	5% & 10%
3. * High Stability	1/10—3	1—50M	0.5% 1% 2% 5%
4. Variable	½	5K—2M	—
5. V. High Resistance	½—3	50M—10^{13}	5% & 10%
6. V.H.F. (Rods & Discs)	1/10—1	10—1K	1% & 2%
WIREWOUND			
4. Rheostats	4—500	10—80K	—
9. Sliders	3—15	10—16K	—
8. Vitreous	3—500	1—150K	1% 2% 5%
7. Cemented	1—15	1—25K	5% & 10%

* The ubiquitous blue (1%) grey (2%) "HISTABS"

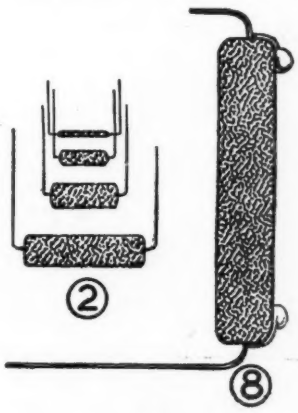

Do you KNOW

THAT an instrument quality HISTAB to ± 0.5% is available.

THAT V.H.F. rods and discs (5) can be supplied in matched pairs.

25 YEARS LAB 1933-1958 JUBILEE YEAR OF RESISTOR SPECIALISATION

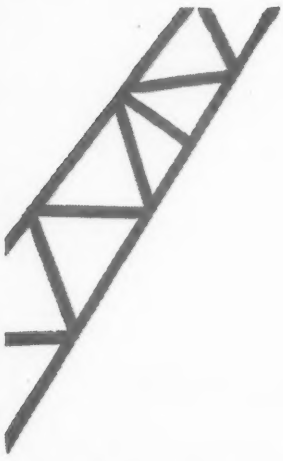

It is gratifying to know that in a world of rising prices our policy of maintaining and, in many instances, reducing prices has resulted over the years, and especially at this period, in ever increasing sales.

We carry a stock of 2,000 types of receiving transmitting and special purpose tubes, and invite your enquiries not only for commercial grade tubes but also for those tested to C.V., JAN and MIL specifications.

Our Organisation is A.R.B. Approved.

If you are not already on our Mailing List, please send for latest Price and Stock Lists.

HALL ELECTRIC LTD

Haltron House, 49/55 Lisson Grove, London, N.W.1

Telephone:
AMBassador 1041 (5 lines)
Cables:
Hallectric, London
TELEX 2-2573

ACOUSTICAL

For the closest approach to the Original Sound— that your enjoyment and appreciation of music may be unimpeded

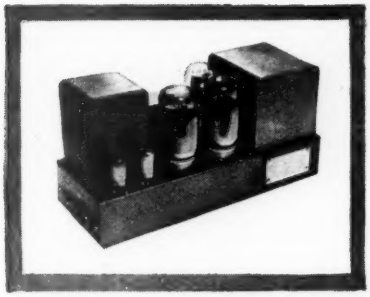

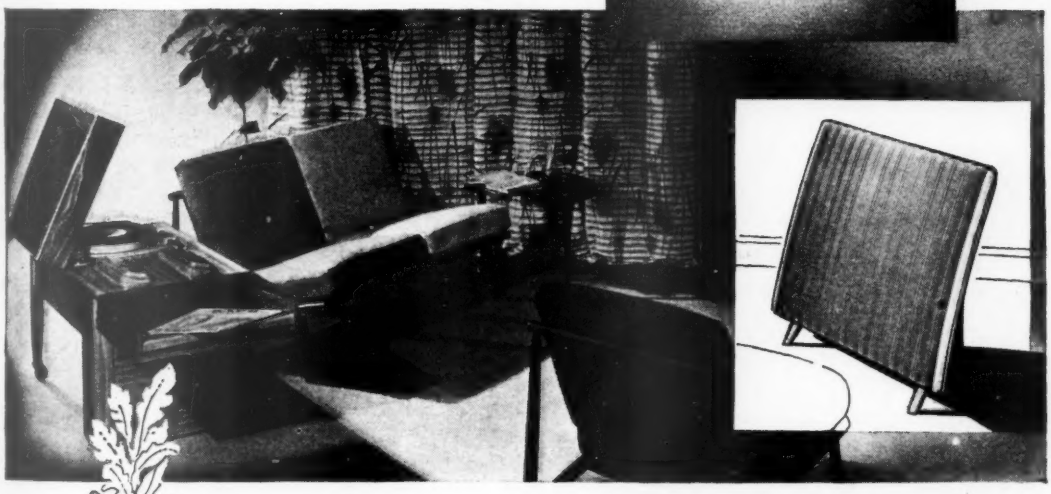

Please ask for illustrated literature describing the QUAD II Amplifier, FM Tuner and Electrostatic Loudspeaker.

ACOUSTICAL MANUFACTURING CO. LTD.
HUNTINGDON, HUNTS.
HUNTINGDON 361.

HERE and NOW TEXAS

HAVE THE RANGE...

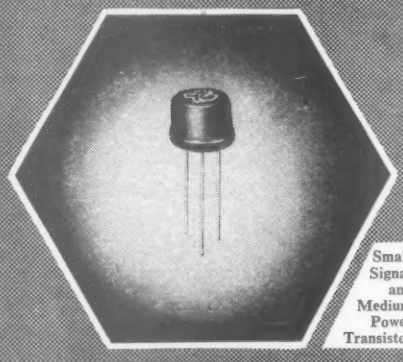

Small Signal and Medium Power Transistor

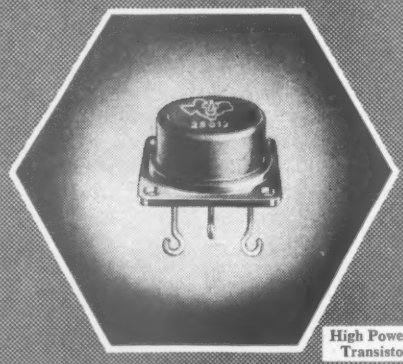

High Power Transistor

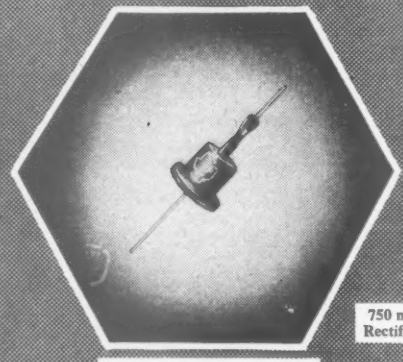

750 mA Rectifier

All illustrations are actual size

Silicon Transistors

Small Signal

This range of general purpose transistors is used for high gain, low level applications. Special features are :—negligible leakage current, a minimum alpha cut-off frequency up to 20 Mc/s, and a tetrode series providing 16 db gain at 30 Mc/s.

Medium Power

These 4-watt diffused base silicon transistors are ideally suitable for output stages in servo amplifiers. A pair in push-pull operation provide sufficient power to drive many types of servo motors. Two types are available, one with a maximum collector voltage of 60, the other of 100; the former is particularly useful for operating from 28-volt battery supplies.

High Power

Texas high-power transistors permit remarkable miniaturisation of power equipment. A collector dissipation of 37½ watts, with complete reliability, in such a small device, can only be achieved by using silicon. Furthermore, these transistors have a typical alpha cut-off frequency of 5 Mc/s.

Silicon Diodes

Medium Power Rectifiers

The new Texas diffused silicon technique has brought a fundamental change in semiconductor rectifiers. Peak inverse voltages up to 600 are featured in each of two ranges now readily available :—a metal-case rectifier provides a mean rectified current of 750 mA, and a glass-seal type provides 400 mA together with a forward to reverse current ratio of $2 \times 10^6 : 1$.

Computer Diodes

These miniature glass sealed diodes have a maximum recovery time of 0.3 micro sec with a forward current rating of 100 mA; there are three types with P.I.V. ratings of 50, 100 and 150 volts. The capacitance is 2.7 pico-farads at – 10 volts, 1 megacycle.

Complete data sheets are available on request.

TEXAS INSTRUMENTS LIMITED

DALLAS ROAD · BEDFORD · TEL: BEDFORD 68051 · CABLES TEXINLIM BEDFORD

CINCH phono plugs and sockets

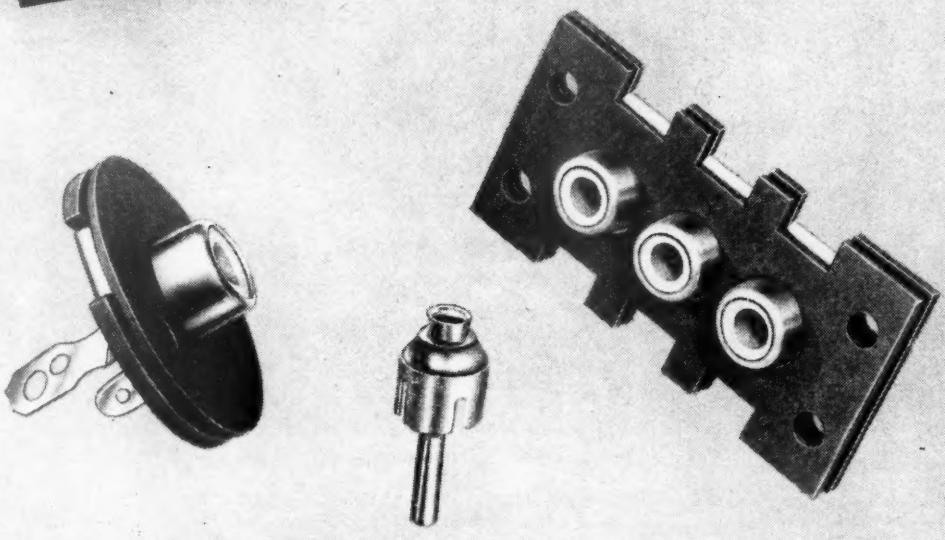

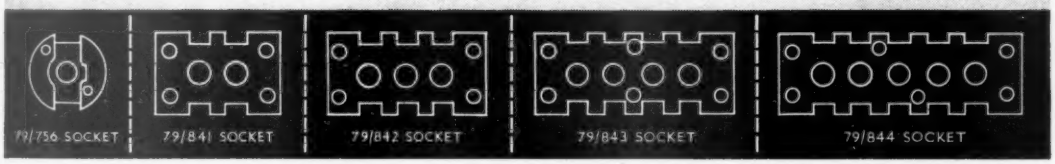

The design and dimensions are to the international standard. With the sockets, backing plates can be supplied for complete insulation from the chassis. *Please write for leaflet No. 4992.*

CINCH

CARR FASTENER CO LTD

STAPLEFORD · NOTTINGHAM

Sole Selling Representatives:

THE BENJAMIN ELECTRIC LIMITED · TOTTENHAM, N.17 · TELEPHONE: TOTTENHAM 9721

Smee's 127

WAYNE KERR UNIVERSAL BRIDGE B.221

Specification

BRIDGE ONLY:
Capacitance: 0.0002 pF to 10 μF in 7 ranges. Accuracy $\pm\frac{1}{4}\%$. Conductance: 0-$\pm$ 100 mmho in 7 ranges. Inductance: 1mH to infinity in 7 ranges. Measuring Frequency: 10,000 radians/sec. (1592 c/s.) Power Supply: 110/115 and 200/250 V 40/60 c/s. Dimensions: 17" x 7" x 11$\frac{1}{2}$" high. Weight: 25 lbs. approx.

WITH LOW IMPEDANCE ADAPTOR:
Capacitance: 1μF—100,000μF in 4 ranges. Resistance: 0-100Ω in 4 ranges: Discrimination on lowest range 50$\mu\Omega$. Inductance: 0-10 mH in 4 ranges. Discrimination on lowest range 5mμH.

PRICES:
Bridge, £175. Low Impedance Adaptor £25

50 MICRO-OHMS TO 10,000 MEGOHMS .0002 PICOFARAD TO 100,000 MICROFARADS, 5 MILLIMICROHENRIES TO INFINITY

● *Accuracy to 0.25% is achieved with complete stability.* ● *Two decades and a continuously variable control indicate independently the resistive and reactive terms to four significant figures.* ● *Adaptors for measurement of conductivity, dielectric constant and loss factor of solids and liquids.*

The B.221 is a highly accurate transformer ratio arm bridge of very advanced design. It provides facilities for the two, three, or four-terminal measurement of impedance or transfer admittance over an extremely wide range at an operating frequency of 10,000 radians/sec. (1592 c/s).

Measurement is unaffected by the impedance of the test leads, which can therefore be of any length. Consequently the instrument is ideally suitable for the determination of temperature coefficient of components under test conditions or, in fact, any remote in situ measurement. A novel mechanism automatically displays the cyphers, decimals and units of measurement. This gives direct reading and avoids any confusion which might be caused by the large multiplying factors involved.

The basic range of the instrument covers impedances from 10,000 megohms to 10 ohms and this is extended to 50 micro-ohms by the use of the Low Impedance Adaptor. Other adaptors have been designed for measurement of conductivity, dielectric constant and loss factor of solids and liquids.

WAYNE KERR

Inductance Meter Type M.149

A small portable instrument designed for the simple and direct measurement of inductance values between 0.05 μH and 100mH. Price £85.

Admittance Bridge Type B.901

An extremely stable transformer ratio-arm bridge designed for unbalanced measurements on aerials, feeders, cables and components at frequencies between 50 and 250 Mc/s. Price £175



THE WAYNE KERR LABORATORIES LIMITED, ROEBUCK ROAD, CHESSINGTON, SURREY. TELEPHONE: LOWER HOOK 1131

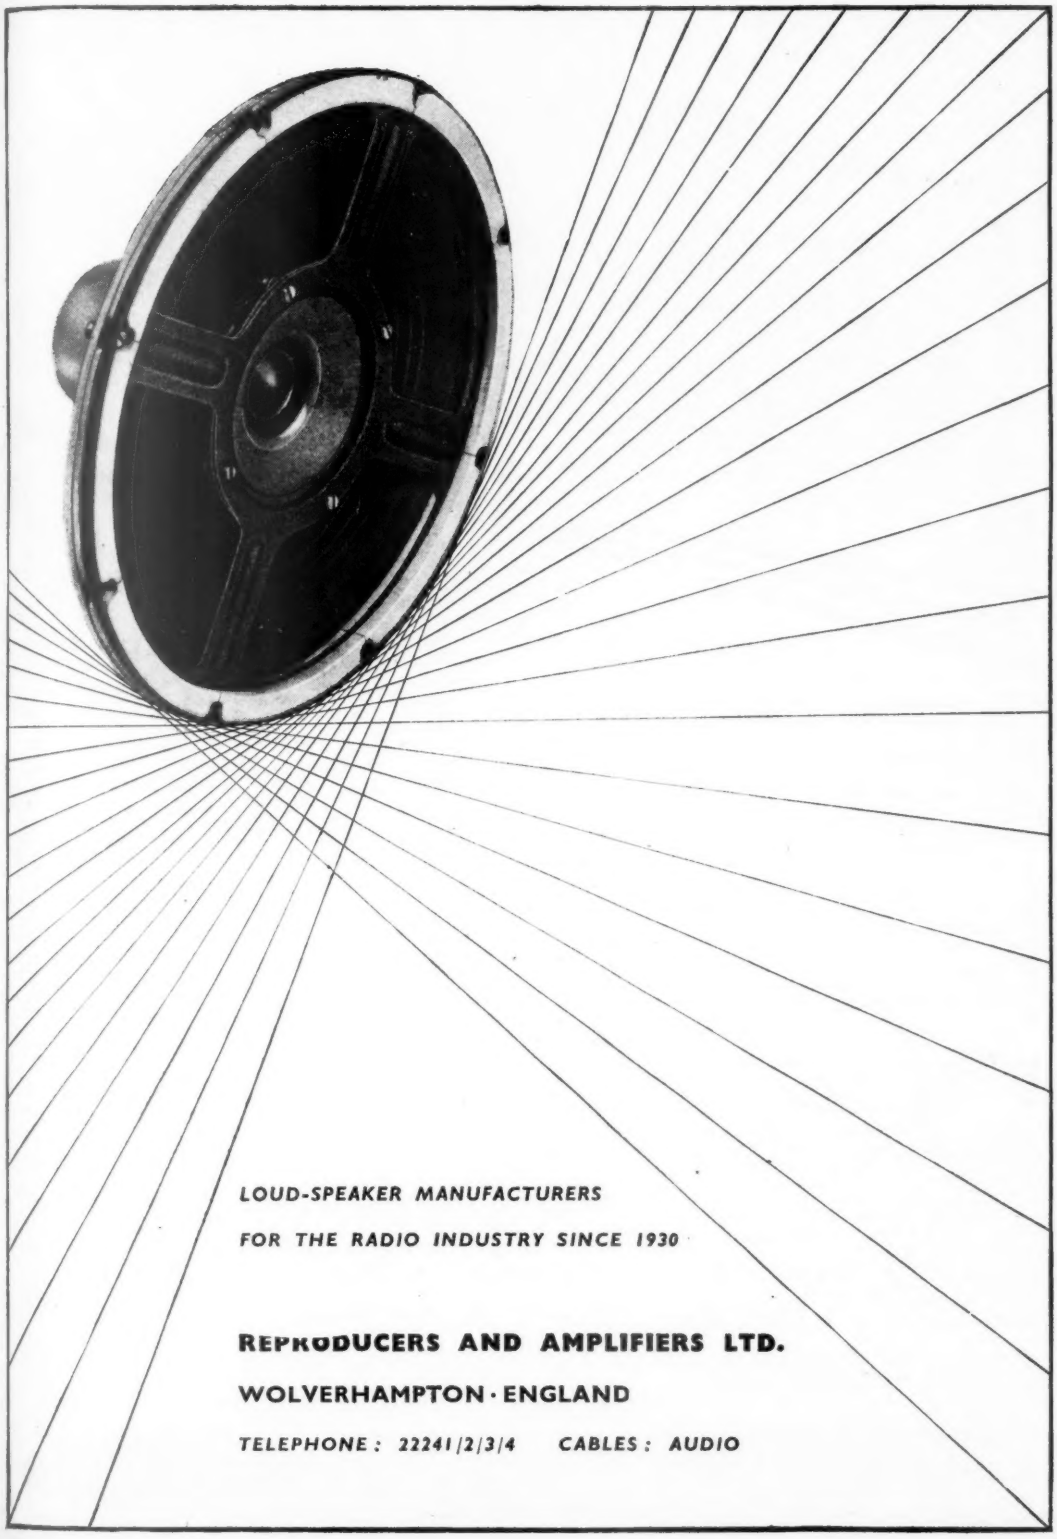
LOUD-SPEAKER MANUFACTURERS
FOR THE RADIO INDUSTRY SINCE 1930
REPRODUCERS AND AMPLIFIERS LTD.
WOLVERHAMPTON · ENGLAND
TELEPHONE : 22241/2/3/4 CABLES : AUDIO

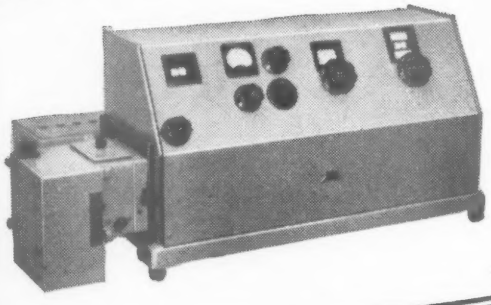

PHOTO CELLS IN ACTION

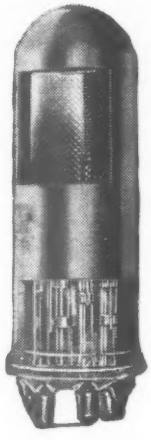

TYPE QVA 39

The Unicam Photoelectric Quartz Spectrophotometer* widely used for visible and ultraviolet investigations, employs two 'Cintel' Photocells one of which is illustrated.

This all quartz envelope cell is a typical example from the wide range of types in current production; in fact there is a 'Cintel' cell available for almost every known application.

* *Photograph by courtesy of Unicam Instruments Ltd.*

over 100 cell types in the current catalogue. Full data on request.

WORSLEY BRIDGE ROAD
LOWER SYDENHAM · LONDON SE26
HITHER GREEN 4600

A Company within the Rank Organisation Ltd.

CINTEL



high frequency

SURFACE BARRIER TRANSISTORS

actual size

A new wide range of high frequency applications can be transistorised with the surface barrier transistors now in production for the first time in Great Britain at the new Swindon factory.

They feature:—

- **real power saving—typical amplifier consumption less than 2 mW per stage**
- **manufacturing techniques backed by Philco Corporation's 3 years of mass production experience**
- **circuit design information drawn from the use of several million similar units in the U.S.A.**
- **reliability and uniformity guaranteed by the use of automatic production equipment in ideal environmental conditions**

Type No.	*Application*	*f max greater than*
2N 344	*General purpose high frequency transistors*	
2N 345	*for use as RF, IF and video amplifiers, converters and in switching circuits.*	*30 Mc/s.*
2N 346	*Of similar application to 2N 345 but where very high frequency is the most important consideration.*	*60 Mc/s.*
2N 128	*Designed primarily for critical military*	*45 Mc/s.*
2N 129	*applications calling for extreme reliability under the most adverse environmental conditions.*	*30 Mc/s.*
2N 240	*A hermetically sealed surface barrier transistor for use in computer circuits. This unit has controlled saturation characteristics and low saturation resistance.*	*30 Mc/s.*
	Note f max = maximum frequency of oscillation	

Other types of Semiconductors high frequency transistors include micro-alloy, micro-alloy diffused and silicon alloy; also germanium power transistors.

Comprehensive data sheets and application notes are available for all Semiconductors transistors. Engineers and senior executives are invited to write for copies, stating the types of transistor or applications in which they are interested.

CHENEY MANOR, SWINDON, WILTS.
Tel: Swindon 6421/2

Semiconductors Limited

S.C.5

NEW Industrial Cathode Ray Tubes

12″ RADAR TUBE
Electrostatic Focus, High Brightness with helical acceleration to 25 kV screen potential.

5″ OSCILLOSCOPE TUBE
Very high plate sensitivity—2·5 v/cm with 10kV screen potential.

8″ RECTANGULAR DISPLAY TUBE
Electrostatic Focus Neck reduced to 23 mm dia. Less weight, more compact, easier scanning.

The Electronics Dept. of Ferranti Ltd., manufactures a wide range of cathode ray tubes and valves for many industrial applications.

FERRANTI

FERRANTI LTD · GEM MILL · CHADDERTON · OLDHAM · LANCS
London Office: KERN HOUSE, 36 KINGSWAY, W.C.2

FERRANTI

FE.183

Yes–but is it HI-FI?

Is it Hi-Fi indeed! Whoever heard of a loudspeaker that wasn't Hi-Fi? Must be as rare as a low-class butcher.

For twenty-five years and more we've been making loudspeakers as good as we've known how and now you want us to label them Hi-Fi! Anyhow our mother told us never to use words if we didn't know what they meant and we always do as mother said. If you want a loudspeaker free of fol-de-rols and gimmicks which can speak for itself, choose the Vitavox DU120 Duplex Coaxial, the loudspeaker without a superlative to its name.

£19 · 10s.

VITAVOX *DU120 DUPLEX COAXIAL* FULL RANGE LOUDSPEAKER

VITAVOX LIMITED • Westmoreland Road, London, N.W.9, England • Telephone : COLindale 8671

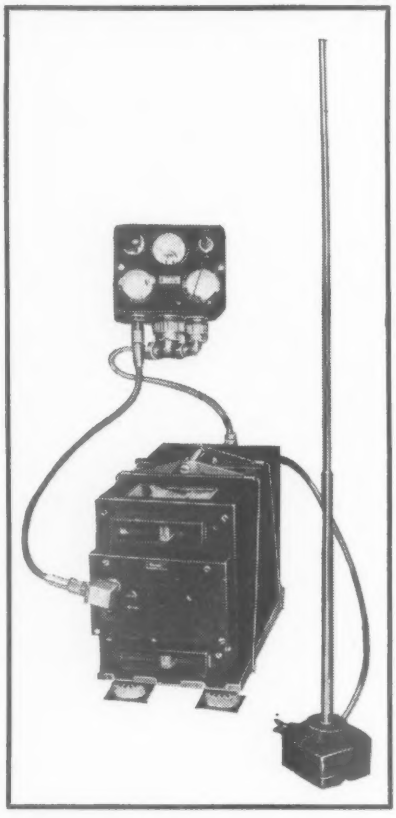

17·6 lb of well-designed equipment

That's the gross weight of this Plessey V.H.F. Transmitter-Receiver. Not only is it light in weight, it is compact in design, making the whole an economical unit for light or medium aircraft.

These are a few of the reasons why the Plessey Type PTR 61 V.H.F. Transmitter-Receiver is used by the Royal Air Force, the Air Forces of Holland, Belgium, Pakistan and Portugal, and many international airlines.

- The combined weight of the transmitter-receiver (which includes the power unit) and the remote controller is 17.6 lb.
- Built-in noise limiter reduces impulse interference.
- Single knob tuning for both transmitter and receiver.
- 6 channels, crystal controlled.
- Power consumption 60 watts approximately.

The equipment provides V.H.F. radio telephone communication facilities on any one of six crystal-controlled channels in the aeronautical communication band 116-132 Mc/s. The range to be expected at 3,000 feet is 50 miles and in practice this is often greatly exceeded. The PTR 61 is designed principally for use in private or training aircraft, but will find many applications wherever compact and economical equipment is required.

- Crystals and channel frequencies can be changed in flight if required.
- Transmitter carrier power 1.25 watts minimum.
- Fully tropicalised.
- Intercommunication facilities up to three positions.
- Remote controls available.
- ARB and AID approved.

Plessey

ELECTRONIC AND EQUIPMENT GROUP
ELECTRONICS DIVISION
THE PLESSEY COMPANY LIMITED · ILFORD · ESSEX
Overseas Sales Organisation:
Plessey International Limited · Ilford . Essex · ILFORD 3040

S1.3a

S·S·White REMOTE CONTROL FLEXIBLE SHAFTING

ELIMINATE costly gears and tooling with flexible shafting! Overcome the difficulties of transmission when the point of control is not directly in line with the point of application. Controls so operated are wonderfully smooth, sensitive and positive.

If you have a problem of control consult our experts—they are there to help you!

● *An invaluable reference book on flexible shafting is available to technicians on request to Dept. W.*

THE S·S·White CO. OF GREAT BRITAIN LTD.
INDUSTRIAL DIVISION
BRITANNIA WORKS, 25-31 ST. PANCRAS WAY, LONDON, N.W.1.
Telephone: EUSton 5393

R.C.7.

Performance proved since 1939 — the patented 'Tuchel' contact principle is a feature of the Modac range of connectors

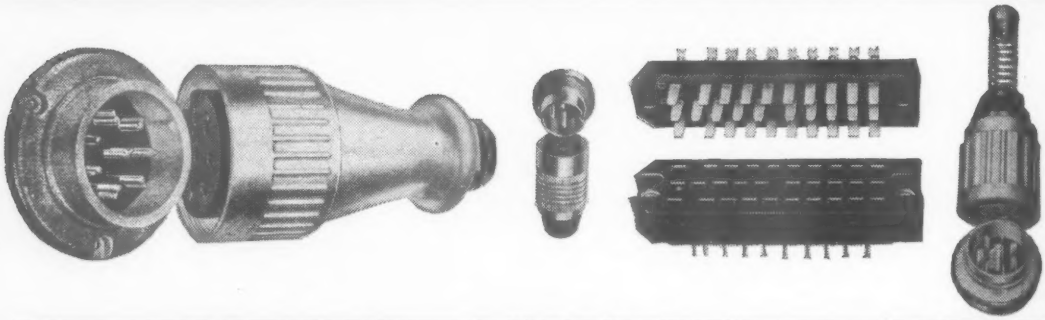

Within the MODAC range of connectors are available strip type, miniature, general service and heavy duty designs to meet most needs and applications.
The full technical data is set out in this new, completely illustrated brochure, a copy of which may be obtained on request.

Send for this new and fully illustrated brochure



MODERN ACOUSTICS LIMITED
CONTACT CONNECTORS DIVISION
MANOR WAY • BOREHAM WOOD • HERTS
Sole concessionaires of Tuchel in Great Britain and Commonwealth Countries.

this patented principle gets to grips with improved contacting

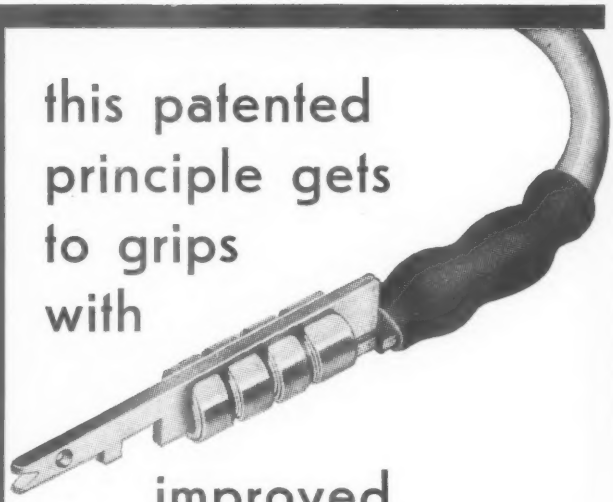

Each pin on every Modac connector is gripped by up to 24 self-cleaning resilient pincer-like contacts which ensure the firmest mating and maintain clean and oxide-free surfaces. Modern Acoustics will be pleased to undertake the design of any special plug and socket arrangement to meet specific needs.

MA1

MARKINGS IN WHITE TO CUSTOMERS' REQUIREMENTS

McMURDO
Multi-Way Voltage Selectors

14 WAY
Type B279001
BLACK P.F. MOULDING

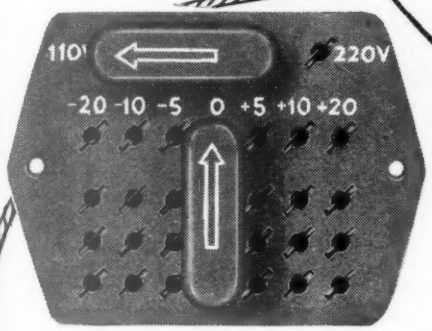

4 Pin Shorting Plugs

6 WAY
Type XVS/6
NYLON LOADED P.F. MOULDING

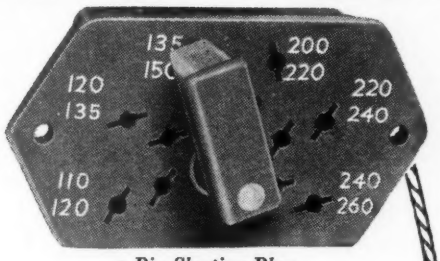

3 Pin Shorting Plug

4 WAY
Type BVS/4
BLACK P.F. MOULDING



3 Pin Shorting Plug

6 WAY MINIATURE
Type BMVS/6
BLACK P.F. MOULDING



Standard B9A (Noval) Valveholder with 2 Pin Captive Shorting Plug

Send for full details to :—

THE McMURDO INSTRUMENT CO. LTD., ASHTEAD, SURREY. Tel: ASHTEAD 3401

MVS15

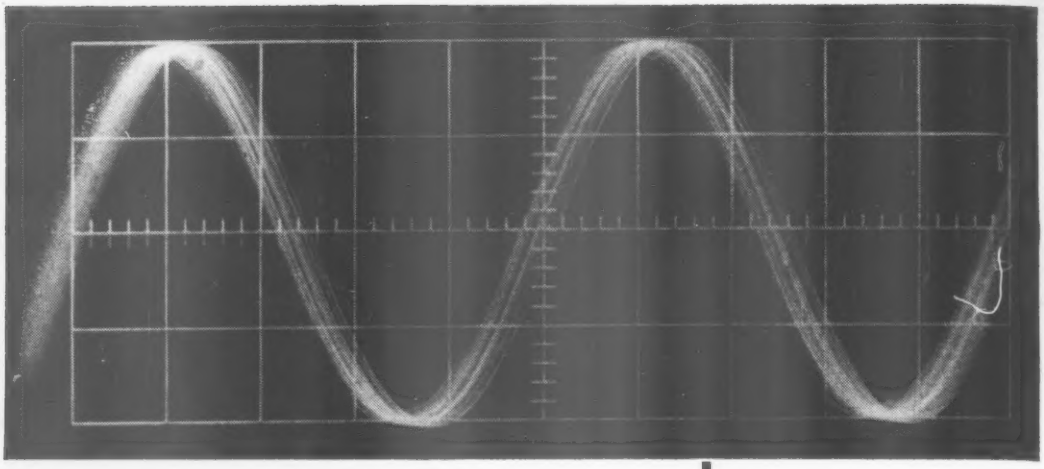

Measurement of 'Wow' and 'Flutter'

In the May issue of ELECTRONIC & RADIO ENGINEER there is described a simple method of measuring wow and flutter. It is mainly applicable to tape recorders. A sine wave from an a.f. oscillator is recorded and observation of the played-back waveform on a c.r. oscilloscope enables the magnitude of any frequency modulation to be deduced.

Original articles by leading authorities are a prominent feature of ELECTRONIC & RADIO ENGINEER. *Regular readership will keep you in constant touch with progress in the entire field of electronics, radio and television.*

ARTICLES IN THE JUNE ISSUE WILL INCLUDE

Modern Oscilloscope Practice

A survey of modern general-purpose oscilloscopes. Current practice in design is described, with indications of the performance obtainable. Some notes on oscilloscope cameras are included.

Manufacture of Silicon Transistors

The physical form and methods of manufacture of various types of silicon transistor are described. Tabulated information is given on types readily available in the U.K.

ALSO

The unique monthly Abstracts and References feature compiled by the Radio Research Organization of the Department of Scientific and Industrial Research.

POST THIS COUPON TODAY

ELECTRONIC & RADIO ENGINEER

TO: ILIFFE & SONS LTD., DORSET HOUSE, STAMFORD STREET, LONDON, S.E.1

Please enter my name as a subscriber to:— ELECTRONIC & RADIO ENGINEER *for 12 months commencing with the June issue. I enclose remittance £2 9s. (U.S.A. and Canada $7.50).*

ORDERS CAN ALSO BE PLACED THROUGH ANY NEWSAGENT.

NAME .....

ADDRESS .....

.....

DATE .....

XUM

Introducing a new

CRYSTAL OSCILLATOR-THERMALLY COMPENSATED

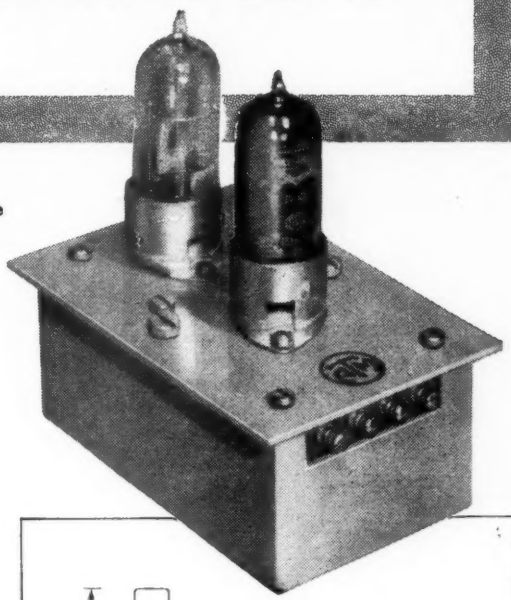

- ✻ **Superior frequency/temperature coefficient of the order of .05/10⁶/°C over wide temperature ranges.**
- ✻ **No contacts, thermostats or mechanical parts.**
- ✻ **Immediately ready for use on switching on, no crystal heater required.**
- ✻ **Improved ageing characteristics.**
- ✻ **Particularly suitable for mobile applications.**

This crystal oscillator has been designed by A.T.E. to overcome the disadvantages of oscillators of the oven mounting type in situations where immediate operational availability is called for, i.e. transport and defence requirements. The unit has the advantages also of great compactness, very simple design and static components.

TYPICAL CHARACTERISTICS:—

Frequencies available: 4 Mc/s to 16 Mc/s.

Temperature range: Either — 20°C to + 70°C
or 0°C to + 50°C

Max. frequency excursions over temperature ranges:
Either ± 5 parts per million
or ± 10 „ „ „ } as required

Output: 1 to 5 volts (according to frequency, etc.) into a load consisting of 100,000 ohms in parallel with 10 pF, simulating a following amplifier.

Power Supplies: HT 230 volts 8mA approx.
LT 6.3 volts 0.3 amps.

Crystals: Style E (B7G) Special Assembly.

Valve: FE91.

Finish: Grey enamel, on silver-plated copper.

Alternative designs—mains or battery operated—are available and other characteristics can be catered for to customers requirements.

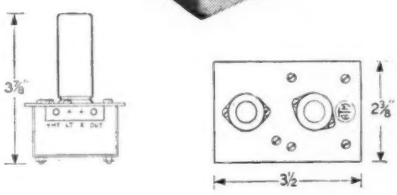

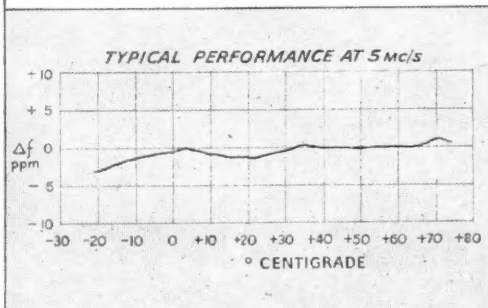

AUTOMATIC TELEPHONE & ELECTRIC CO. LTD.

STROWGER HOUSE, ARUNDEL STREET, LONDON, W.C.2
Telephone. TEMple Bar 9262. STROWGER WORKS, LIVERPOOL 7

AT 14841

C

PYE

Mozart

10 watt amplifier

PRINTED CIRCUIT RELIABILITY

In chassis form (8¼ lbs.) or in open-work metal case (9 lbs.) Control panel in copper finish.

The new Pye Mozart is one of the smallest and most efficient 10-watt amplifiers ever devised. The chassis measures only 10¼" x 3⅜" x 5". Its outstanding performance has been reached through good design and expert hand finishing. Leading technical writers have been unanimous in praise of its ingenuity. We reprint below some extracts from an article by Percy Wilson in 'The Gramophone'.



Dialomatic Selector

The Mozart has input facilities for records, tape and radio. New 'dialomatic' pick-up compensation unit gives instant matching for most types of pick-up.



On/Off Push Button

This is completely separate from the volume control and eliminates all mains interference.



Simplified Circuitry

This brilliantly simplified printed circuit uses only 3 valves, a metal rectifier and a minimum of capacitors and resistors, allowing a great saving of space.



Improved Output Transformer

New grain orientated laminations have increased the efficiency and compactness of Mozart's transformers. Curves show how for given outputs, they can be operated at much higher flux densities.

"The performance is REMARKABLY GOOD"

P. Wilson writing in 'The Gramophone'

". . . this is one of the most interesting amplifiers I have seen in recent years."

". . . the chassis lay-out looks good and the arrangement on the printed circuit is particularly cunning."

". . . the circuit itself is both novel and flexible in the matter of control."

". . . the circuit controls are of the most satisfactory types that I know."

". . . we found ourselves unanimous in admiration of its ingenuity."

"The performance is remarkably good . . . one of my colleagues, indeed, was so impressed with the lay-out, components, workmanship and performance that he affectionately nicknamed it Pye's Pint Pot! By which I suppose that he means that it holds a quart."

The creative mind of the scientist . . . in the hands of the craftsman

PYE LIMITED OF CAMBRIDGE

Pye Limited, Auckland, C.I. New Zealand.

Deutsche Pye G.m.b.H., Berlin-Zehlendorf-West, Roonstrasse 2, Germany.

Pye Pty. Ltd., Melbourne, Australia.

Pye (Ireland) Ltd., Dublin, Eire.

Pye Limited, Mexico City.

Pye (Canada) Ltd., Northline Road, Toronto.

Pye Corporation of America, 1149 Raritan Avenue, Highland Park, New Jersey, U.S.A.

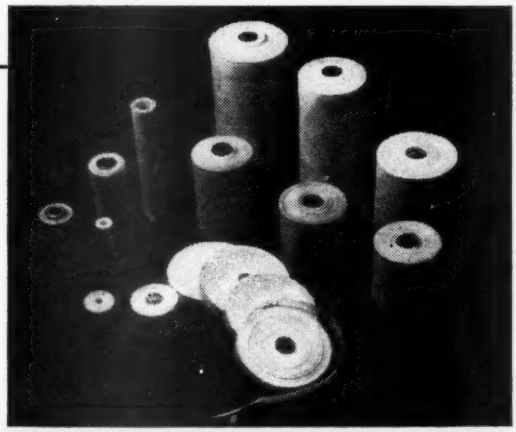

Radio Radar Television Electronics and

Polytetrafluoroethylene (PTFE)

THIS COMPANY began experimenting with PTFE when it was first introduced into this country. Shortly afterwards we started processing and fabricating the material in a special division of our own factory, giving our own designation of CF2 (derived from the formula) to the range of products ultimately produced.

Since that time, our experience, both of the behaviour of the material itself, during processing, and the application of its remarkable properties has been accumulating.

We have developed techniques, and we have designed special equipment with which to apply them, so that we now mould, fabricate, and otherwise fashion PTFE from its basic forms, i.e. rounds, discs, flat mouldings, rings, cylinders, rods, tubes, tape and cord, as illustrated, into innumerable components which are already widely used by the electrical and electronics industries. We also have considerable experience in the application of PTFE dispersion coatings to a wide variety of materials and surfaces.

It is obviously impossible for a material of this kind to attain its full usefulness to any industry without research and experimental work. We have set aside a substantial part of our resources for this purpose, and will willingly co-operate with any Company desiring to make use of the material, to the fullest extent of these resources. By arrangement we will make available facilities for practical development work to be carried on.

The following Information Bulletins are now available: No. 4, BASIC PROCESSING AND PROPERTIES, and No. 5, APPLICATIONS. *Both of these publications will be sent on request to interested engineers.*

Crane Packing LTD. OF SLOUGH ENGLAND
A COMPANY

3″ general purpose tube
DG7-32 (CV2431)

The DG7-32 is being successfully employed for waveform monitoring and for inexpensive oscilloscopes. It has a low operating voltage and a burn-resistant screen.

3″ precision tube
DG7-36/3WP1 (CV3946)

This is a flat-faced tube with close electrical tolerances. Its high sensitivity and low deflection plate capacitances recommend it for precision monitoring and measurement applications.

Six Mullard tubes

that cover most instrument applications

Designers faced with the problem of selecting instrument cathode ray tubes are finding it quicker and easier to check against the Mullard range first. This compact but comprehensive range of tubes fulfils 85% of all practical requirements. Write on your Company notepaper for the free data booklet " Mullard Instrument Cathode Ray Tubes " which gives full information on all types.

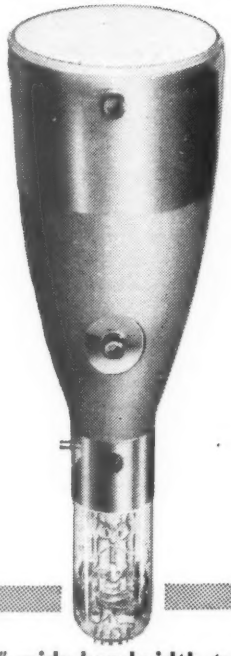

5″ wide-bandwidth tube

DH13-97

The DH13–97 employs the high post deflection accelerator ratio of 5 : 1 and is electrically equivalent to a spiral type p.d.a. tube. Side arm connections to the deflection plates keep capacitances extremely low and contribute to the high quality wide-bandwidth performance of this tube.

5″ general purpose tube

DG13-34/5ADPI (CV5035)

The DG13–34 is a flat-faced tube. Its post deflection accelerator, high sensitivity and low capacitances make it an ideal tube for precision monitoring or general purpose oscillography where frequencies up to 8 or 10 Mc/s have to be observed.

1″ waveform monitor tube

DH3-91 (CV2302)

The low operating voltage of this tube (350V min.) allows ordinary h.t. lines to be used. The tube is automatically focused and its length is less than 4½ inches.

5½″ x 1½″ flat A-scan tube

DG16-22/7APHI (CV2352)

The screen of the DG16–22 measures 5½″ x 1½″. A number of these tubes can be easily stacked to provide multiple displays in confined spaces.

MULLARD LIMITED
MULLARD HOUSE
TORRINGTON PLACE
LONDON W.C.1
TEL: LANGHAM 6633

Mullard

COMMUNICATIONS AND INDUSTRIAL VALVE DEPARTMENT

Mullard

MVT341a

this new

Plessey

device provides

one knob tuning

This new idea brings one knob control for the medium wave and a preset long wave station and eliminates band switches for personal receivers. But the development achieves more than that: it effects considerable saving in component and assembly cost. For the relatively small cost of two capacitors you can now dispense with the long wave coils and switch!

This latest development has been achieved by Plessey at Havant by fitting a switch to their 'W' and 'V' type Variable Capacitors, which connects the extra capacitance required for the long wave station. The capacitor tunes the whole of the medium wave band and automatically switches to the long wave Light Programme at the end of its travel.

In small receivers, using Ferrite rod aerials, the long wave coil, switch and leads can be omitted, resulting in unimpaired efficiency of the medium wave coil. And again, where gramophone pick-up sockets are provided, this new Plessey tuning device could be used to mute the RF stages, a decided improvement on tuning to a quiet part of the wave band.

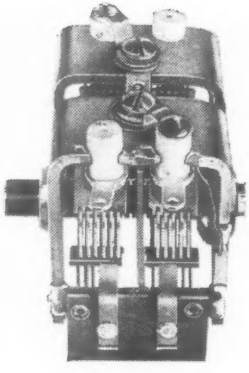

'W' Type Variable Capacitor Patent applied for.

The Plessey Range

The most modern of manufacturing techniques and long experience in this specialised field ensure the high precision of Plessey Variable Capacitors. These components are produced in variations of size and performance, including miniature and shaped vane types, to meet today's stringent demands.

COMPONENTS GROUP · VARIABLE CAPACITOR UNIT

THE PLESSEY COMPANY LIMITED · NEW LANE · HAVANT · HANTS · TELEPHONE: HAVANT 1311

Overseas Sales Organisation: PLESSEY INTERNATIONAL LIMITED · ILFORD · ESSEX · ENGLAND

CO66

Everybody wants EMITAPE

the World's best magnetic tape!

EMITAPE "88" *General Purpose*

EMITAPE "99" *Long play, giving 50% increased playing time.*

* 4 SPOOL SIZES

to fit all standard magnetic tape recorders

3" MESSAGE **5" JUNIOR**

5¼" CONTINENTAL **7" STANDARD**

* HIGHEST TECHNICAL STANDARDS

- High sensitivity
- Low noise level
- Low print-through factor
- Freedom from curl and stretch
- Anti-static
- Low head wear

* EMICASE

solves storage problems

protects spools from dust

allows easy identification of leader tapes

TYPE No.	TITLE	SIZE	LENGTH APPROX.	EMITAPE IN "EMICASE"	PRICE WITHOUT "EMICASE"
88/6E	"Junior"	5" dia.	600'	£1 . 3 . 6	£1 . 1 . 0
★99/9E	"	5" dia.	850'	£1 . 10 . 6	£1 . 8 . 0
88/9E	"Continental"	5¼" dia.	850'	£1 . 10 . 6	£1 . 8 . 0
★99/12E	"	5¼" dia.	1200'	£1 . 17 . 6	£1 . 15 . 0
88/12E	"Standard"	7" dia	1200'	£1 . 17 . 6	£1 . 15 . 0
★99/18E	"	7" dia.	1800'	£2 . 12 . 6	£2 . 10 . 0

★ *LONG PLAY—50% increased playing time.*

EMITAPE *the magnetic recording tape with the world-wide reputation!*

E·M·I SALES & SERVICE LTD (*Recording Materials Division*) **HAYES · MIDDLESEX**

ES159

ADCOLA
(Regd. Trade Mark)
SOLDERING INSTRUMENTS
& ALLIED EQUIPMENT

ILLUSTRATED
DETACHABLE
$\frac{3}{16}$" BIT MODEL
LIST NO. 64

Protective
Shield
List No. 68

CATALOGUES HEAD OFFICE SALES & SERVICE

ADCOLA PRODUCTS LTD.,
GAUDEN ROAD,
CLAPHAM HIGH ST.,
LONDON, S.W.4.

TELEPHONES:
MACaulay 3101
& 4272

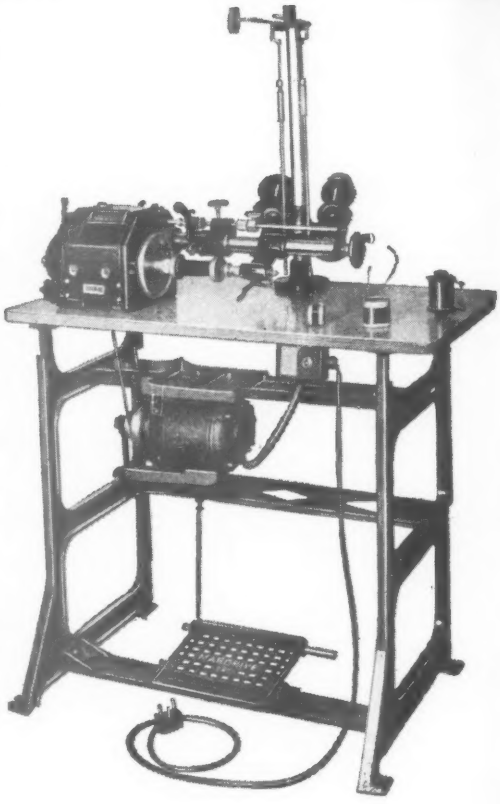

AUTOMATIC
COIL WINDING MACHINE

Type AII1. (25-50 S.W.G.) Type AII/X (19-46 S.W.G.)

COMPLETE WITH

★ Cast-iron stand and polished wood table top.

★ Dual reel carrier and tensioner.

★ $\frac{1}{4}$ h.p. integral clutch motor with foot control

THE MOST OUTSTANDING MACHINE ON THE MARKET!

Dustproof construction—up to four coils can be wound simultaneously—micrometer traverse setting—easily adjusted wire gauge setting—cadmium and chromium-plated steel parts—instantaneous re-set counter reads up to 100,000 turns—Wire Tensioning Stand holds two reels.

We will be pleased to send you an illustrated leaflet giving a full technical specification on request.

KOLECTRIC LTD
73 UXBRIDGE ROAD
EALING, LONDON, W.5
EALing 8322

BCC

WAY AHEAD!

The Type 46 lightweight V.H.F. pack set is one of the B.C.C. range of portable, mobile and fixed equipment for V.H.F. Communications Systems.

This very compact set is well known the world over for its rugged reliability and outstanding performance.

The Type 46 is used by Survey Teams, Airfield Police, Harbour Pilots, Explorers, Night Security Patrols, Fire Brigades, Civil Defence, Civil Engineering Projects, Airport Tarmac Marshallers, Film Directors on location and for countless other applications.

A three channel version Type 47 is also available.

Details of this and other items in our extensive range are available on request.

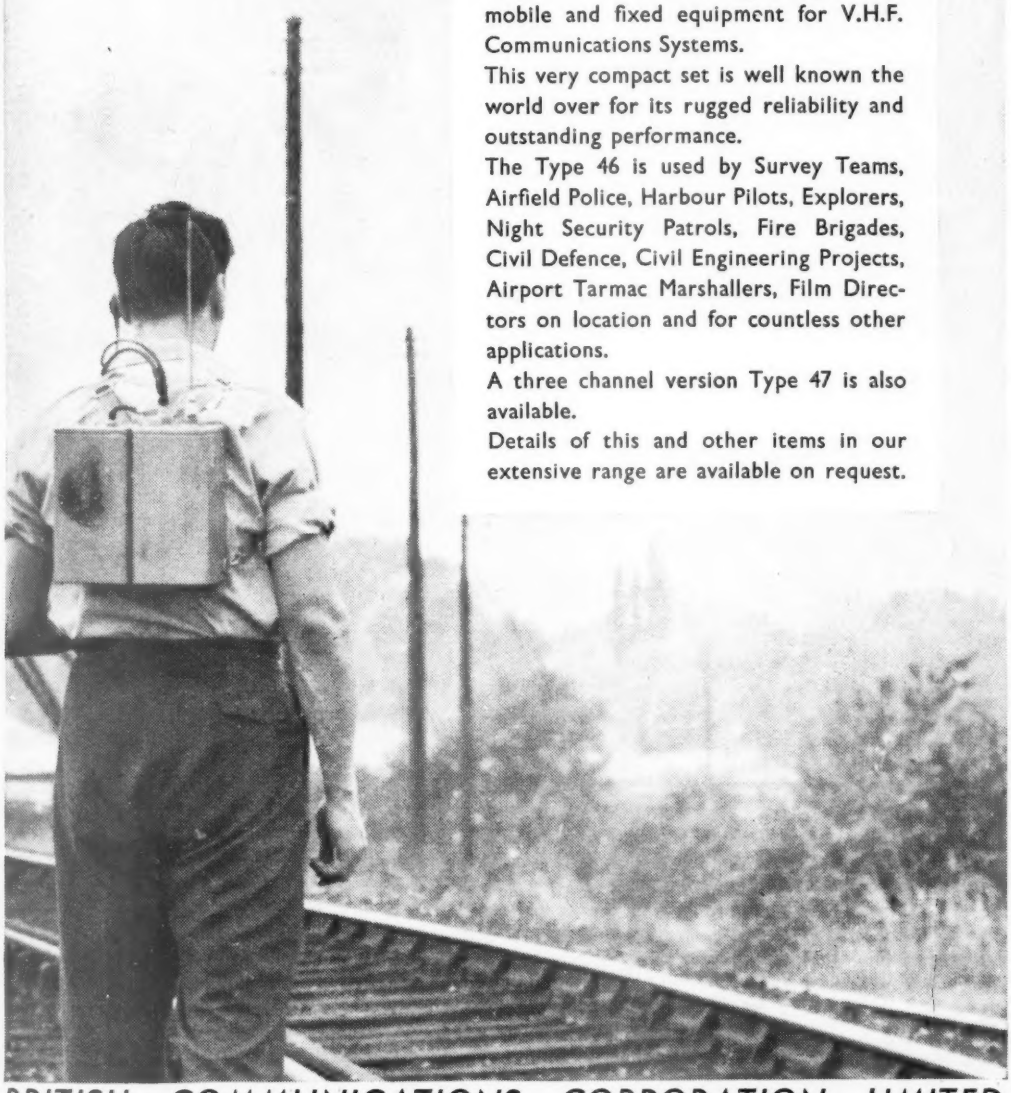

BRITISH COMMUNICATIONS CORPORATION LIMITED

Wembley England
Telephone: Wembley 1212 Cables: BeeCeeCee

NEW RANGE OF TRIMMERS

Jackson Brothers trimmer, type C701/709. Differential Condensers with capacities of up to 150 P.F. with .015" air gap (each half) and up to 30 P.F. with .045" air gap (each half).

It's reliable . . .
if it's made by Jacksons



C701/709



C711/719

Jackson Brothers Butterfly Vane Trimmer type C711/719, with capacity of up to 65 P.F. with .015" air gap (each half) and up to 15 P.F. with .045" air gap (each half).

JACKSON BROS. (LONDON) LTD

KINGSWAY · WADDON · SURREY

Telephone Croydon 2754/5

A NEW CYCLE STAND

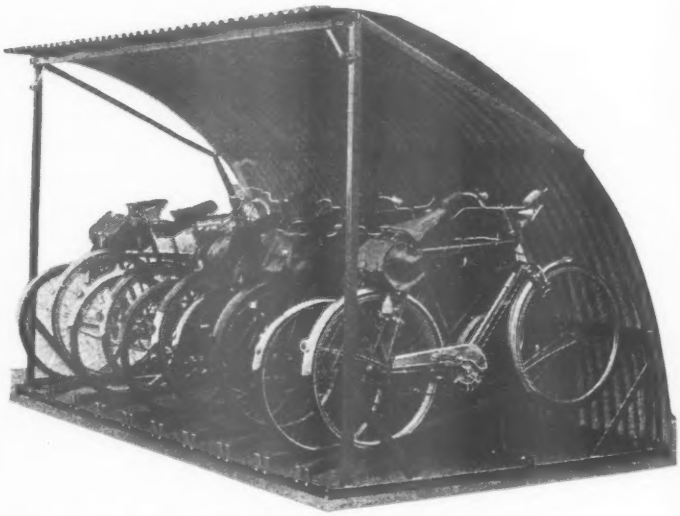

★ We present Type J/C/S as another Cycle Stand to add to the 26 different Types we already manufacture, and feel that there are advantages to offer, apart from economy in cost.

★ The CURVED ROOF which gives rear and roof shelter in one section, is far superior to other forms of rear and roof sheeting which have to be fixed separately.

★ An outstanding point is that no guttering is required, rain being conducted to the rear, thus giving a neater appearance on the finished product.

★ ABIX Cycle Stands are finished Stove Enamelled Olive Green.

★ ABIX Cycle Stands are despatched in component parts for easy erection on site. Assembly drawing supplied on receipt of your order.

★ Lamp Brackets, Chain and Number plates can be supplied, should they be required.

PLEASE WRITE FOR ILLUSTRATED CATALOGUE W.W.1 TO:

ABIX

(METAL INDUSTRIES) LIMITED

Steel Equipment for Office & Factory

POOL ROAD, WEST MOLESEY, SURREY.

Phone: MOLESEY 4361/3. *Grams: ABIX, EAST MOLESEY.*

Also Manufacturers of : Steel partitioning (Industrial and Executive), Clothes Lockers, Slotted Angle and Adjustable Steel Shelving.

COMMUNICATION ACOUSTICS

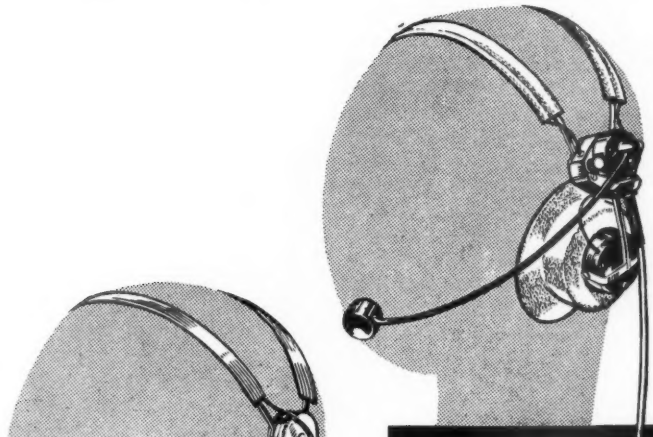

Aircrew Headset 2560



- Electro-Magnetic Microphone, of special speech frequency design.
- Microphone mounted on swivel boom assembly.
- Fully tropicalised earphone inserts.
- Greater wearing comfort.
- Headset A.R.B. Approved.

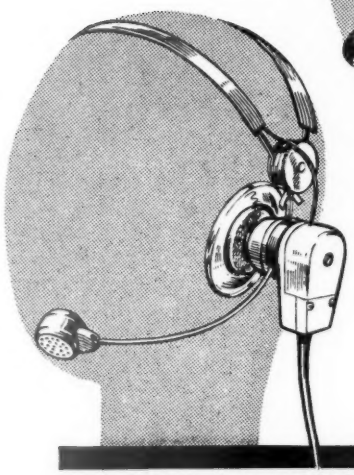

Air Traffic Control Lightweight Headset 2583
(As specified by M.T.C.A. for London and Gatwick Airports)

- Weight only 8 oz. (approx).
- Noise-cancelling Microphone.
- Microphone mounted on swivel boom assembly.
- Fully-adjustable double-headband assembly.
- Plastic or rubber earpads to Operator's preference.

Headsets... these illustrations are representative of the Amplivox Aircrew and Lightweight range, and we are proud that they have been chosen extensively by Air-Lines and Air-Traffic Control Authorities both in this country and abroad.

Remember too, that we have Aircrew Headsets for Military Aircraft, and that our Lightweight Headphones and Headsets are also used in Sound and Television Studios, in Military, Shipping, and Police-Radio Communication Systems, in Dictating and Recording Machine Installations and in many other applications.

and other products

Communication Systems · Headphones and Headsets
Earphone and Microphone Inserts · Communication Helmets
Stethophones · Microphone Assemblies
Ear-Defenders · Extruded-Cordage and Cables

Enquiries to:

AMPLIVOX LIMITED INDUSTRIAL DIVISION

52-53 Margaret Street, London W.1.
Telephone: LANgham 7918

For monitoring

tape recorders use* . . .

S. G. BROWN Headphones

FOR MONITORING a tape recording, or listening to a recording without disturbing others in the room, there is no better way than by using headphones. For finest results, use reliable BROWN Headphones, with their clear and pure tone.

*Type K

Particularly suitable for monitoring and laboratory work, these instruments are precision built to fine limits.

They are very comfortable to wear.

Brown

Headphones & Handphones
Automatic Helmsman
Marine Compasses
Echo Sounders
Navigational Equipment

For full details of BROWN Headphones and other equipment write to the Telephone Dept.:

S. G. BROWN LTD.

SHAKESPEARE STREET · WATFORD · HERTS

Telephone: Watford 7241

more and more companies are specifying

merad

the first irradiated polythene equipment wire in the U.K.

MERSEY CABLE WORKS LTD • Liverpool 20

A COMPANY

MCW6

THE SERVISCOPE

REGD TRADE MARK

DC TO 6 Mc/s

TIME AND VOLTAGE CALIBRATION

A PORTABLE HIGH PERFORMANCE MEASURING OSCILLOSCOPE

★ INCORPORATES AN ENTIRELY NEW TYPE OF TIME BASE
formerly only available on the most expensive American oscilloscopes.

★ 18 PRE-SET CALIBRATED SWEEP SPEEDS FROM
.5 sec/cm to 1 μ sec/cm

★ AUTOMATIC TRIGGERING OR TRIGGER LEVEL SELECTION

★ DC COUPLED UNBLANKING

★ 9 CALIBRATED Y SENSITIVITIES
FROM 100 mV/cm to 50V/cm ALL DC TO 6 Mc/s

★ SWEEP EXPANSION TO OVER 10 SCREEN DIAMETERS

★ BUILT-IN TV SYNC SEPARATOR

★ ULTRA BRIGHT 3″ FLAT FACE CRT

★ COMPLETELY PORTABLE 8″ x 6″ x 12″

THE FINEST, MOST VERSATILE

portable oscilloscope ever offered to the electronics industry.

Write for fully illustrated leaflet.

TELEQUIPMENT LTD

313 Chase Road, Southgate, London N.14. PALmers Green 7111

TAKE YOUR PICK

Our wide range of capacitors, incorporating all the latest developments, are described fully in these new leaflets...

SEND NOW for COPIES

DALY has succeeded in maintaining full capacity values and working voltages in more compact designs, specially suited to ultra modern equipment :—

PHOTO-FLASH EQUIPMENT • DEAF AIDS
PRIVATE TELEPHONE INSTALLATIONS
AMPLIFIERS • D.C. POWER UNITS
TRANSISTOR EQUIPMENT
MAGNETISATION EQUIPMENT
TEST GEAR

DALY
ELECTROLYTIC CAPACITORS

Condenser Specialists for over 20 years.

DALY (*Condensers*) **LTD.,** WEST LODGE WORKS,
THE GREEN, EALING, LONDON, W.5. Phone: Ealing 3127-8-9. Cables: Dalcyon, London

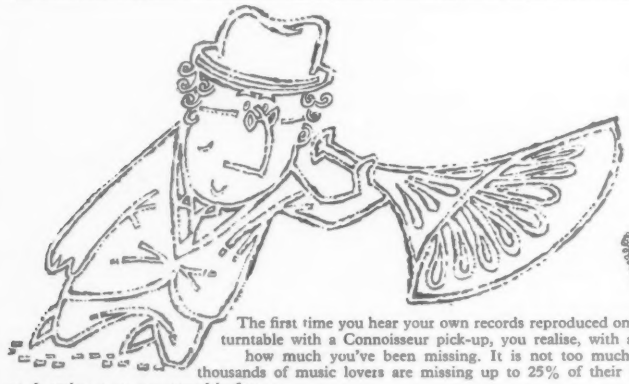

Search for hidden music

The first time you hear your own records reproduced on a Connoisseur turntable with a Connoisseur pick-up, you realise, with a shock, just how much you've been missing. It is not too much to say that thousands of music lovers are missing up to 25% of their records, the y are throwing away one record in four.

Connoisseur equipment is built to studio standards for domestic users. It provides a completely new experience as near perfection as possible.

Test it for yourself.

Connoisseur Pick-up with 3 interchangeable heads for standard and microgroove recordings. Armature mass 4/5 milligrams, suspended on a nylon thread. Frequency range 25-20,000 c.p.s. ± 2 dBs. Available with diamond or sapphire stylus.

Connoisseur 3-speed motor, with lathe turned full 12in. turntable of non-ferrous material. Mechanical speed change without braking allows a 4% variation on all 3 speeds. Virtually vibrationless, with low noise level and low hum induction. Probably the finest turntable on the market.

Send for descriptive leaflets to:
A. R. SUGDEN & CO (Engineers) LTD., Well Green Lane, Brighouse, Yorkshire. Tel. 2397

OVERSEAS AGENTS:
U.S.A.: Ercona Corporation, 551, Fifth Street. New York 17, N.Y. CANADA: The Astral Electric Co. Ltd., 44, Danforth Road, Toronto 13, Ontario. NEW ZEALAND: Turnbull & Jones Ltd., Head Office: 12/14, Courtenay Place, Wellington. HONG KONG: The Radio People Ltd., 31 Nathan Road, Hong Kong.

MAIN DISTRIBUTORS:
AUSTRALIA: British Merchandising Pty. Ltd., 183, Pitt Street, Sydney, and J. H. Magrath (Pty.) Ltd., 208 Little Lonsdale Street, Melbourne. EAST AFRICA: International Aeradio (East Africa) Ltd. P.O. Box 3133, Nairobi. MALAYA: Eastland Trading Co. 1, Prince Street Singapore.

USINE MÉTALLURGIQUE DOLOISE
FRANCE'S LEADING MANUFACTURERS OF:
CONTROL KNOBS FOR RADIO AND TV SETS
TUBE SOCKETS FOR RADIO AND TV EQUIPMENTS
CONNECTORS OF ALL TYPES FOR RADIO AND TV APPLICATIONS
RADIO SHIELD HARDWARE
USINE MÉTALLURGIQUE DOLOISE
S.A. au capital de 43.200.000 francs
17, AVENUE NIEL • PARIS-17e TÉL. MAC-Mahon 18-65 & 19-65 ADRESSE TÉLÉGRAPHIQUE: RENAUJEAN-PARIS

Masterpiece . . .

The liquid arpeggio from the fingers of an inspired virtuoso . . . that almost tangible feeling of grace and movement accompanying an impeccable performance . . . Capture the precious beauty of immortal music at its finest moments, flawlessly, permanently on Mastertape.

Mastertape

MAGNETIC RECORDING TAPE BY

MSS RECORDING CO. LTD. Colnbrook, Bucks.

Telephone: Colnbrook 2431.

Made with a new and improved lacquer, Mastertape possesses marked anti-static properties and is remarkably free from any tendency to curl.

Bullers CERAMICS FOR INDUSTRY

High quality material and dimensional precision are attributes of Bullers die-pressed products.

Prompt delivery at competitive prices.







We specialise in the manufacture of—**PORCELAIN** for general insulation

REFRACTORIES for high-temperature insulation

FREQUELEX for high-frequency insulation

PERMALEX & TEMPLEX for capacitors



BULLERS LIMITED

MILTON · STOKE-ON-TRENT · STAFFS

Phone: Stoke-on-Trent 54321 (5 lines) · Telegrams & Cables: Bullers, Stoke-on-Trent

Ironworks: TIPTON, STAFFS Phone: Tipton 1691

London Office: 6 LAURENCE POUNTNEY HILL, E.C.4 Phone: MANsion House 9971

CATHODEON

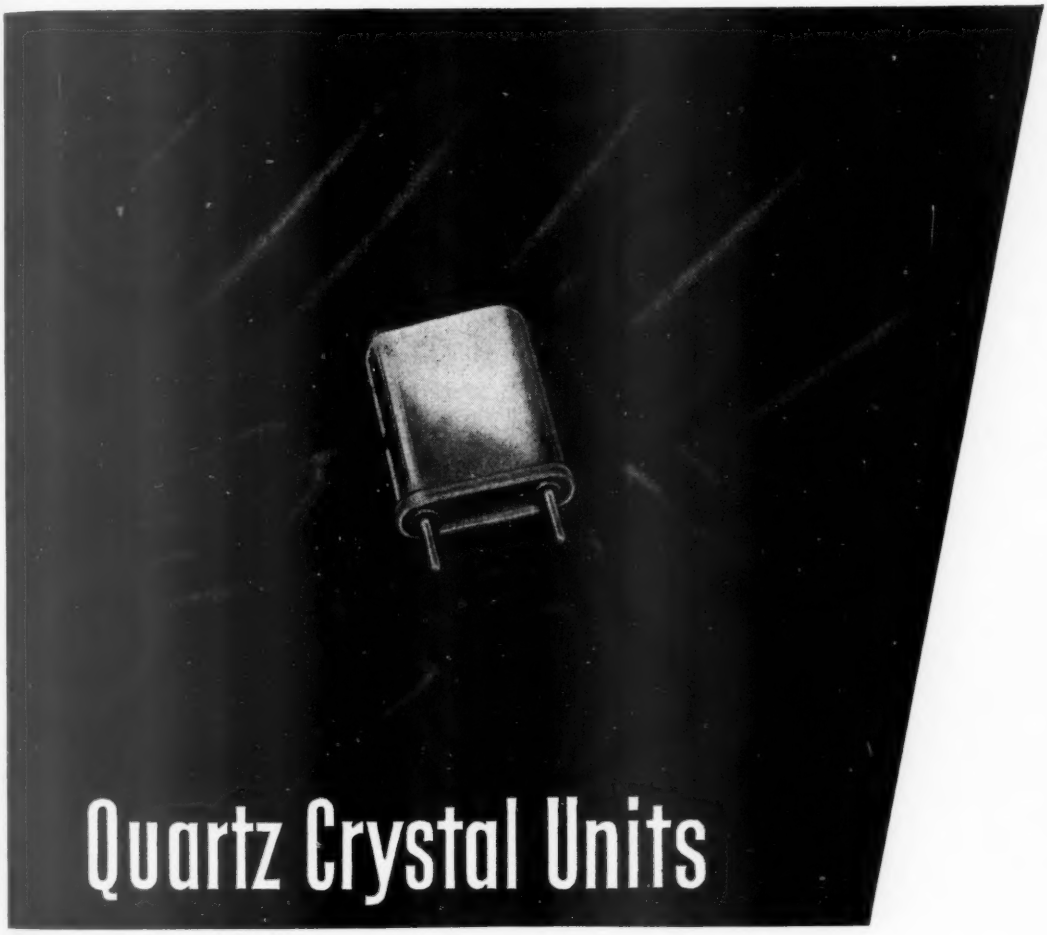

Prompt delivery and competitive prices of all crystal types in the frequency range 1,000 Kc/s to 75,000 K/cs.

The recent publication "Guide to the Specification and Use of Quartz Oscillator Crystals" is a reference which designers of oscillator circuits should not ignore.

Copies at 5/- each supplied on request.

CATHODEON CRYSTALS LIMITED

LINTON · CAMBRIDGESHIRE

Telephone: LINTON 501 (3 lines)



ARDENTE

make a wide range of

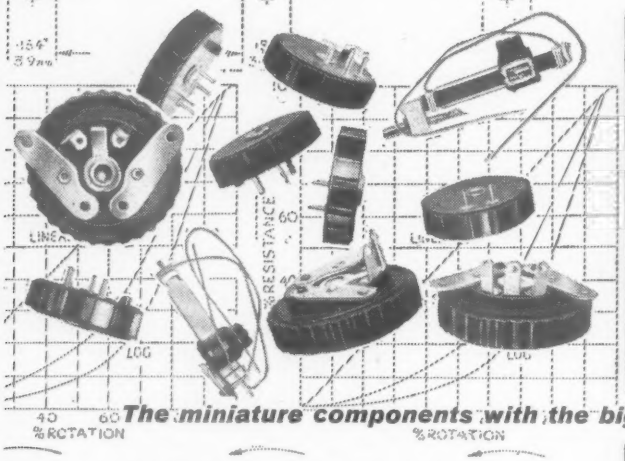

MINIATURE POTENTIOMETERS AND ELECTRONIC COMPONENTS

The miniature components with the big technical background

Sole Manufacturers and Exporters:

ARDENTE ACOUSTIC LABORATORIES LTD.

8-12 MINERVA ROAD, NORTH ACTON, LONDON, NW10 *Telephone: ELGar 3923*

Suppliers of components and hearing aids to the Government and manufacturers all over the world.

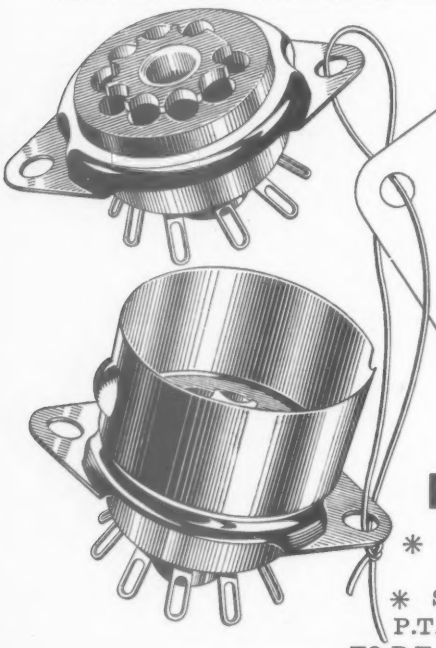

McMURDO

P.T.F.C.E.

VALVE HOLDERS

B7G AND B9A

* LOW LOSS—**GRADE 1.**
* FULLY TROPICALISED—**CLASS H 1.**
* SILVER PLATED PHOSPHOR-BRONZE CONTACTS.

P.T.F.C.E. MOULDINGS HAVE SIMILAR PROPERTIES TO P.T.F.E. BUT THEY ARE LESS COSTLY TO PRODUCE.

FULL INTER-SERVICE TYPE APPROVAL TO Z.560092 - Z.560094 - Z.560095 - Z.560134

Send for full technical details to:—

McMURDO INSTRUMENT CO. LTD., VICTORIA WORKS, ASHTEAD, SURREY. **Telephone: ASHTEAD 3401**

MVH. 14

GOLDRING HI-FI EQUIPMENT

No. 600 CARTRIDGE

The latest Goldring variable reluctance cartridge—for the perfectionist. The first cartridge in the U.K. designed specifically around a diamond stylus. Much-extended frequency response and truly remarkable contribution to a sense of "presence". Replaceable stylidiamond for L.P. and sapphire for 78 r.p.m. Mu-metal shield, *£11. 13. 6. incl. tax.*

"Jubilee" Transcription Arm

A micro-balance transcription arm of laboratory quality designed to accommodate Goldring cartridges or other high quality cartridges with standard fixing dimensions. Model T.R.1, for records up to 12", *£11. 13. 6. incl. tax.* Model T.R.2, for professional use with records up to 16", *£13. 2. 9. incl. tax.*

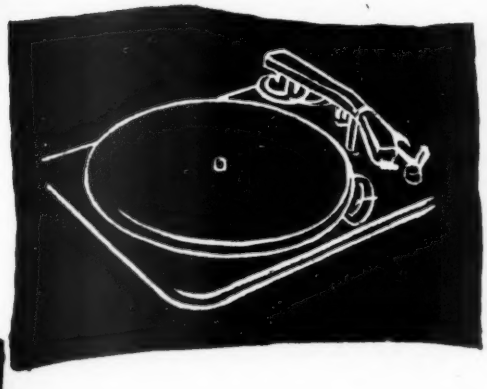

Goldring - Lenco Transcription Motors

Four-speed precision motor units, made by Swiss craftsmen, with *continuously variable speed control.* Three versions with or without transcription arm and Goldring "500" or "600" Variable Reluctance Cartridge. Leaflet with illustrations and full details gladly sent on request.

Goldring

THE GOLDRING MANUFACTURING CO. (Gt. Britain) LTD.
486-488 High Road, Leytonstone,
London, E.11
Leytonstone 8343

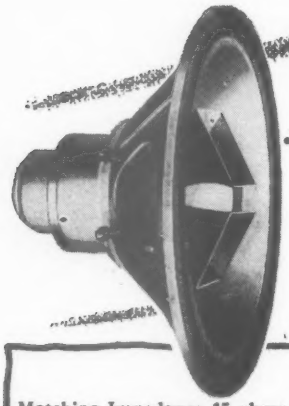

...fiddle, 'cello, big bass drum bassoon, flute and euphonium...

. . . each is reproduced perfectly in its own distinctive timbre by the BTH K10A Speaker. This is a unit designed to exploit to the full the capabilities of a modern 'Hi-fi' equipment.

Built to an exacting specification, the equipment comprises an 18-inch cone for low frequencies, with a co-axial pressure-type unit and horn for high frequencies, and is complete with cross-over network.

Matching Impedance 15 ohms
Cross-over Frequency 1700 c.p.s.
Total Weight (including filter) 38 lb.
List price £45.



DESIGNS OF TWO SUITABLE CABINETS ARE SUPPLIED FREE WITH THE SPEAKER

Write for leaflet G12094 for full technical information

B T-H

A5206

BTH SOUND EQUIPMENT LTD.

REYNOLDS HOUSE, 5, GT. NEWPORT STREET, LONDON, W.C.2

an A.E.I. Company

CABINETS FOR ANY EQUIPMENT

WE MAKE CABINETS TO YOUR SPECIFICATION



THE BUREAU

This popular bureau cabinet is veneered with the finest selected Walnut and beautifully polished in a medium shade. Designed to accommodate almost any of the many units we have available and to give generous storage compartments.

WALNUT £16 . 16 . 0
NATURAL OAK £16.18.0

"PRELUDE"

This most attractive cabinet has been designed to utilise natural acoustic properties of the walls, and is ideal where space saving is a consideration.

Will take 8in. or 10in. speaker unit with provision for Tweeter Unit (12in. speaker cabinet also available).

Packed Flat. **£10 . 10 . 0**

THE SERENADE

Veneered with finest selected walnut, beautifully polished to a medium shade; this attractive cabinet has generous storage space, with board sliding out smoothly on metal rollers.

This cabinet can be fitted with any of the latest H-IFI Units.

£12 . 19 . 6



THE CONTINENTAL

This elegant Cabinet is the latest in our range designed in the continental style, solidly constructed and finished in selected mahogany veneers. Available medium, light, high gloss or contemporary finish.

£29 . 10 . 0



'TYGRAM'

This smart-looking cabinet is available with or without legs. Can accommodate any type of turntable (including transcription or autochanger units).

The unit also accommodates any type of amplifier, plus most radio tuners.

9 gns.
without legs **£7 . 14 . 0**



THE REGENT

This superb cabinet can accommodate almost any combination of Radio-Feeder Unit, Amplifier Control Unit, Motor Unit and Loudspeaker System. There is adequate storage space. Veneered with finest selected walnut & polished. Has a pneumatic lid and ball bearing castors.

£22 . 10 . 0

THE CONTEMPORARY

This beautifully made cabinet is oak veneered with mahogany interior and is waxed finished. Available in any shade to order at slightly extra cost.

This cabinet can be fitted with any of the latest Hi-Fi Units.

£10 . 15 . 0

WE ALSO CARRY A LARGE RANGE OF EQUIPMENT

See Page 80

We supply all units and can fit any cabinet with the latest Hi-Fi amplifiers, tuners, transcription units, record changers, speakers, etc., all available on easy H.P. terms. Send for our new comprehensive illustrated catalogue.

LEWIS RADIO

120 (Dept. WW658) GREEN LANES, PALMERS GREEN (Nr. Cock) LONDON N.13. Telephone: BOWes Park 1155/6

an important announcement

from

Plessey

and BRAYHEAD

The Plessey Company Limited and Brayhead (Ascot) Limited announce that they have entered into a joint development and manufacturing agreement covering television tuners and f.m. permeability tuners. The agreement provides for the complete interchange of tooling, and technical and manufacturing processes on these products. Although independent laboratories are being maintained, the two Companies will co-operate closely in all forward development.

The first *P*lessey-*B*rayhead products to be marketed under the new arrangement will be the successful Brayhead BT16 tuner now to be known as the *P-B 1*, and the new Plessey f.m. permeability tuner to be known as the *P-B 2*. These products will be sold in the United Kingdom by both Companies and throughout the rest of the world by Plessey International Limited.

The rationalization achieved by the co-operation of these two important producers will, it is believed, result long-term in substantial technical and economic advantages to the Trade, as well as placing Britain in a strong competitive position overseas as the European Common Market develops.

CC3

AMPHENOL

IMPORTANT ANNOUNCEMENT

AMPHENOL (Great Britain) **LTD.**

announce that their association with Gas Purification & Chemical Co. Ltd. has been terminated, and that they are now a wholly owned subsidiary of Amphenol Electronics Corporation of Chicago, U.S.A.

All communications should in future be sent to their new Factory and Office premises at Burgess Hill Industrial Estate, Victoria Road, Burgess Hill, Sussex.

AMPHENOL (Great Britain) **LTD.**

Burgess Hill Industrial Estate, Victoria Road, Burgess Hill, Sussex.

Telephone: Burgess Hill 85616

Arcolectric Signal Lamps



S.L.162



S.L.160



S.L.135
For M.E.S. bulbs



S.L.130
For M.B.C. (M.C.C.) bulbs

S.L.130 A high quality fitting for M.B.C. bulbs.
S.L.135 A new adjustable M.E.S. signal lamp.
S.L.160 } New miniature neon signal lamps.
S.L.162 } for 80-600 volts. Fixing ¼" hole.

Samples of above to manufacturers for design purposes AT ONCE — WITHOUT CHARGE — on request.

Many other signal fittings—M.E.S., B.C., S.B.C., etc.

Write for Catalogue No. 131

ARCOLECTRIC SWITCHES · LTD

CENTRAL AVENUE, WEST MOLESEY, SURREY. Tel.: MOLESEY 4336

VAPOUR-COOLED VALVES

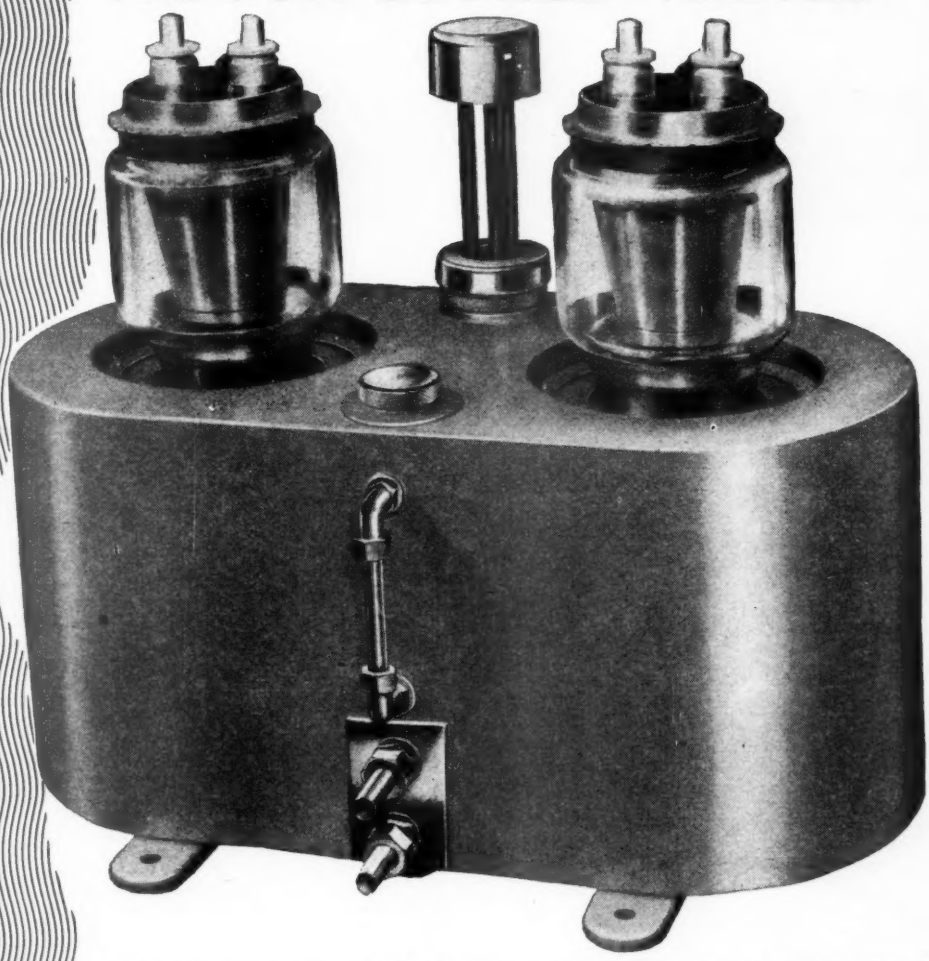

Conditions sometimes exist both in industry and in communications where neither forced air cooling nor water cooling of high power valves is entirely satisfactory. Air may be so dirt laden that the cleaning of filters and radiators calls for undue effort and cost and at the same time water may be expensive, scarce or otherwise unsuitable.

Under such conditions the E.E.V. vapour-cooled valves may give just the advantages needed: low water cost; built-in protection against failure of water supply; quiet operation; and greater overload capacity. Many types in the E.E.V. range of forced air and water-cooled valves are now available as vapour-cooled versions. Typical examples are

Forced air-cooled	Water-cooled	Vapour-cooled
BR1102	BW1102	BY1102
BR1121	BW1121	BY1121
BR189	BW189	BY189

'ENGLISH ELECTRIC'

ENGLISH ELECTRIC VALVE CO. LTD. *Chelmsford, England*
Telephone: Chelmsford 3491

AP101

ELECTRONIC TECHNICAL SERVICES

TELEPHONE – RAVENSBOURNE 8951-2

Contractors to

Ministry of Supply

Admiralty

Atomic Energy Authority

Specialists in the preparation of **TECHNICAL HANDBOOKS**

EMERGENCY
Drawing Office Services

1 NEWMAN ROAD
BROMLEY KENT

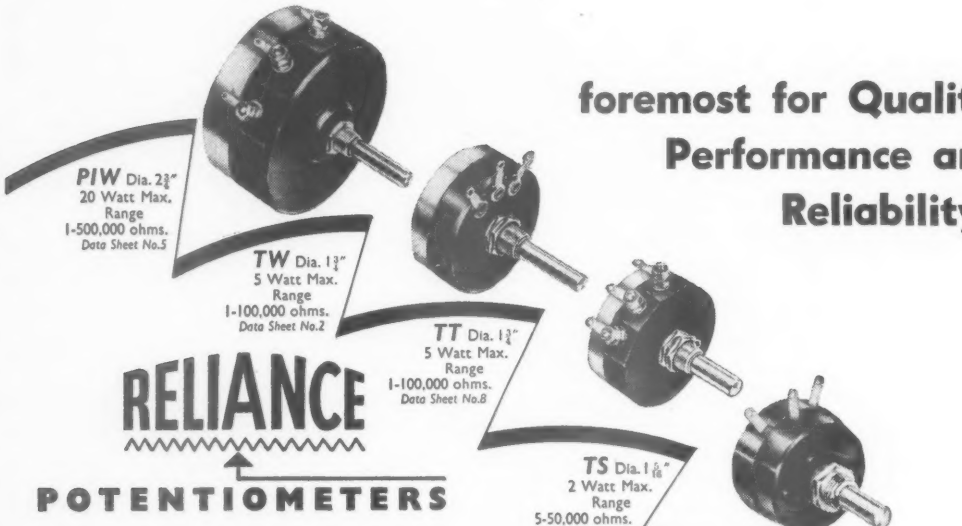

foremost for Quality, Performance and Reliability—

RELIANCE

POTENTIOMETERS

The name "Reliance," aptly chosen more than thirty years ago, is recognised for potentiometers of consistent accuracy, with a record of long-life reliability. The standard range—the most comprehensive available—covers from 1 to 500,000 ohms and includes linear, log, semi-log and non-inductive types, and, depending on characteristics, ratings up to 20 watts. GANGED MODELS available of TT, TW, PIW and TS on common spindle. Fully tropical and concentric spindles type TW only.

RELIANCE MANUFACTURING Co. (SOUTHWARK) Ltd., SUTHERLAND Rd, HIGHAM HILL, WALTHAMSTOW, LONDON, E.17
GD 10
Telephone No. (and Cables) LARkswood 3245

LINEAR

For ***HIGH SENSITIVITY!***
HIGHEST FIDELITY!
MAXIMUM RELIABILITY!
REASONABLE COST!

THE 'CONCHORD'

A HIGH FIDELITY 30 WATT AMPLIFIER INCORPORATING PRE-AMPLIFIER AND TONE CONTROLS

EMPLOYING THE LATEST MULLARD EL34 OUTPUT VALVES IN ULTRA LINEAR OPERATION AND HIGH GRADE SECTIONALIZED OUTPUT TRANSFORMER

Size approx. 13 x 8½ x 7in. Stoved gold hammered finish. Weight 14lb. For operation on 200-250 v. 50 c.p.s. A.C. mains. Or other voltages to order. A chrome-handled cover is available at 19/6.

Retail Price 15 GNS.

The Following Outstanding Test Figures Include Pre-amplifier and Tone Control Stages

FREQUENCY RESPONSE
(Exc. Rumble Filter.) ± 1 d.b. 20-20,000 c.p.s.

RUMBLE FILTER.
12 d.b. per octave below 50 c.p.s.

BASS CONTROL.
Continuously variable + 12 d.b. to — 12 d.b. at 50 c.p.s.

TREBLE CONTROL.
Continuously variable. + 12 d.b. to —6 d.b. at 12,000 c.p.s.

HUM LEVEL.
Referred to full output —73 d.b.

MAXIMUM POWER OUTPUT.
In excess of 33 watts.

MAINS POWER CONSUMPTION.
110 watts.

STABILITY.
Entirely stable with capacity of .08 mfd. in parallel with loudspeaker load.

EFFECTIVE OUTPUT IMPEDANCE.
0.9 ohms across 15 ohm terminals.

INPUT IMPEDANCE.
Both inputs 500k plus 10 pfd.

NEGATIVE FEEDBACK.
Total 28 d.b.

SENSITIVITY.
Input (1) 20 millivolts for rated output.
Input (2) 200 millivolts for rated output.

HARMONIC DISTORTION.
0.05% at 10 watts. 0.1% at 20 watts.

OUTPUT SOCKETS.
Provide matchings for 3 ohm and 15 ohm loudspeakers.

EXTERNAL POWER SUPPLY.
300 v. 30 m/a. 6.3 v. 1.5 a. for radio tuner.

VALVES.
B.V.A. EF86, EF86, ECC83, EL34, EL34, GZ34.
Due to use of Mullard EF86 valves microphony is virtually nil.
As in our extremely successful 'Diatonic' two individually controlled inputs provide mixing facilities for microphone and gram., etc., etc.

The 'DIATONIC' HIGH FIDELITY 10-14 WATT ULTRA LINEAR AMPLIFIER

WITH INTEGRAL PRE-AMP AND TONE CONTROLS

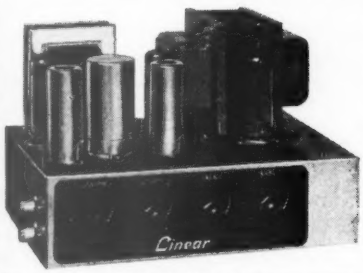

Size only 9-7-6½in. Weight 12½lb. Power consumption 120 watts. Outputs for 3 and 15 ohm loudspeaker.

12 GNS Retail Price For A.C. mains 200-250 v. 50 c.p.s. Or other voltages to order. Chassis finish stoved hammered gold, or grey blue.

Attractive cover with chromium carrying handles now available at 17/6.

Full advantage has been taken of the latest component miniaturization developments to reduce unit size to a minimum.

Two high impedance input sockets are provided for microphone and gram., etc. Each input has its associated vol. control.

B.V.A. valves are employed, ECC83, ECC83, EL84, EL84, EZ81.

ALL TEST FIGURES INCLUDE PRE-AMP

FREQUENCY RESPONSE.
±2 d.b. 30-20,000 c.p.s.

MAXIMUM POWER OUTPUT
in excess of 14 watts.

RATED OUTPUT 10 WATTS.

SENSITIVITY.
Vol. (1) 22 millivolts for rated output.
Vol. (2) 220 millivolts for rated output.

TREBLE LIFT CONTROL.
Continuously variable +6 d.b. to —13 d.b. at 12,000 c.p.s.

BASS CONTROL.
Continuously variable +13 d.b. to —18 d.b. at 50 c.p.s.

HARMONIC DISTORTION.
0.19% measured at 6 watts.

HUM LEVEL.
Referred to maximum output —60 d.b.

NEGATIVE FEEDBACK.
Total 32 d.b.

H.T. and L.T. Supply Point is included for a radio tuner

ALSO AVAILABLE:

The L45. A compact High Quality 4-5 watt amplifier.

Size approx. 6-5-5½in. high. Sensitivity is 28 millivolts so that the input socket can be used for either microphone or gram., tape, radio tuner, etc. B.V.A. valves used are ECC83, EL84, EZ90. Controls are: Vol., Treble and Bass with mains switch. The Tone controls provide full compensation for long playing records. Output matching for 3 ohm loudspeaker.

Retail price **£5/19/6.**

THE LT45 TAPE DECK AMPLIFIER. A complete unit (power pack and oscillator incorporated) ready for connection to A.C. mains. 3 ohm loudspeaker and practically any make of deck. Negative feedback equalization adjustment by multi-position switch for 3¾, 7½ and 15in. per sec.

Retail price **12 gns.**

THE LG3 GRAM AMPLIFIER. Overall size 6½ x 4½ x 2½ in. Controls: Vol. and Tone (with mains switch). Output for 2-3 ohm loudspeaker. All above for 200-250 v. 50 c.p.s. A.C. mains.

Retail price **55/9.**

Send S.A.E. for Leaflets. **TRADE AND EXPORT ENQUIRIES TO—**

LINEAR PRODUCTS LTD. ELECTRON WORKS, Tel.: Leeds 630-126 (3 lines), Armley, Leeds

MAXI-Q REGD.

COIL PACKS

CP.3/370pF and **CP.3/500pF.** These 3 waveband Coil Packs are available for use with either 370pF or 500pF tuning condensers. The coverages are: Long Wave 800-2,000 metres. Med. Wave 200-550 metres. Short Wave 16-50 metres. Designed for use with "MAXI-Q" glass scale type S2. Retail price of each unit: **32/-** plus 12/9 P.T.—total **44/9.**

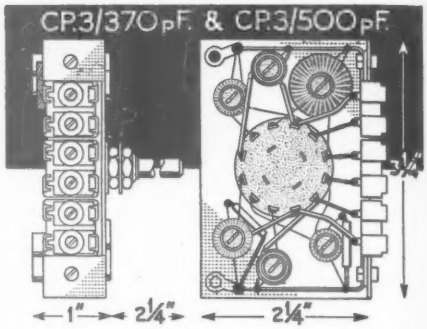

CP.3/G. As above but with Gram position, suitable for use with 500pF tuning condenser: **39/-** plus 15/7 P.T.—total **54/7.**

CP.3/F. This Coil Pack is for use with a 500pF tuning condenser and covers the standard Long, Med. and Short wavebands with the addition of the band 50/160 metres. This covers the Trawler band, Aeronautical and the 80 and 160 metre Amateur bands: **49/-** plus 19/7 P.T.—total **68/7.**

CP.3F/G. As CP.3/F but with Gram position: **57/-** plus 22/9 P.T.—total **79/9.**

CP.4/L end **CP.4/M.** These compact 4-station Coil Packs are available for either 1 Long Wave and 3 Medium Wave stations (CP.4/L) or 4 Medium Wave stations (CP.4/M). They are fully wired and require only four connections for use with any standard frequency changer valve: **25/-** plus 10/- P.T.—total **35/-.**

CP.4L/G and **CP.4M/G.** As CP.4/L and CP.4/M but with provision for Gram position: **31/-** plus 12/5 P.T.—total **43/5.**

See Technical Bulletin DTB.9 for details of all Coil Packs, 1/6.

GENERAL CATALOGUE covering technical information on full range of components **1/-** *post free.*

DENCO (CLACTON) LTD. (Dept.W.W.), 357/9 Old Road, Clacton-on-Sea, Essex

STOP PRESS.—TREBLE LIFT INDUCTOR FOR THE MULLARD TYPE "C" TAPE AMPLIFIER. Wound in ferroxcube pot core assembly. Price: **22/6** each.

Trading Terms for direct postal orders, C.W.O. plus appropriate postal charges. Please send S.A.E. with all enquiries.

Model 130A INSULATION TESTER

Taylor

Model 191A R.C. OSCILLATOR

For workshop tests and component checking.

This mains operated ohm meter covers insulation and medium values of resistance. It is light and portable. **Meter:** 4in. scale **TAYLOR CENTRE POLE MOVING COIL METER** with-knife edge pointer. **Sensitivity:** 50 μA. **Ranges:** (1) 20 ohms to 100 K. ohms at test pressure of 50 millivolts. (2) 200 K. ohms to 1,000 megohms at test pressure of 500 volts. **Accuracy:** On each range 10% of centre scale values. **Press Switch:** Disconnects meter when rapidly charging capacitors for test. **Dimensions:** 8in. × 5⅛in. × 4¼in. (20 × 15 × 11 cms.) **Weight:** 5¾lb (2.6 Kg.).

PRICE **£16.0.0**

PROMPT DELIVERY

For Transformer, Amplifier and Loudspeaker response tests.



Frequency Ranges: 10 c/s to 100 c/s, 100 c/s to 1,000 c/s, 1 Kc/s to 10 Kc/s, 10 Kc/s to 100 Kc/s. **Output Impedance:** 600 ohms all ranges. **Output Level:** ± 1 dB over entire range. **Attenuation:** Coarse–20 dB -40 dB-60 dB. Fine 20 dB calibrated 1-10. Accuracy ±2%. **Distortion:** Less than 1% at 1,000 c/s. **Sine Wave Output:** Max. 3.75 milliwatts through "T" attenuator pads matching to 600 ohms, .15 mV to 1.5 V. R.M.S. into 600 ohms .3mV to 3V R.M.S. into high impedance. **Square Wave:** Rise time less than .3 microseconds. Less than 10% tilt at 10 c/s .3 mV to 3 V into 600 ohms. 6 mV to 6 V into high impedance **Dimensions:** 12½in. × 8½in. × 6in. (31 × 21 × 15 cms). **Weight:** 18lb. approx. (8.2 Kg.).

PRICE **£31.0.0** PROMPT DELIVERY

ALL TAYLOR INSTRUMENTS are available on 7 days FREE TRIAL

Credit Sale Terms available

WRITE NOW FOR FULL INFORMATION

TAYLOR ELECTRICAL INSTRUMENTS LTD MONTROSE AVENUE, SLOUGH, BUCKS

Telephone SLOUGH 21381

THAT ELUSIVE WORKS MANAGER . . .

found



in 10 seconds

NO LOUDSPEAKERS, BELLS or FLASHING LIGHTS
only the man who's wanted knows and replies.

Selective Induction is saving time, money and worry in Offices, Factories, Hospitals, Hotels, Departmental Stores etc., all over the Country. All key personnel carry small transistorised receivers bearing a number. When they are wanted their numbered key is pressed on a small transmitter. Immediately they must respond to the URGENT 'PEEP PEEP' in their pockets which summons them and them alone to ACTION! A verbal message can be transmitted if desired.

- Covers areas indoors or out, up to 10,000,000 sq. ft.
- Designed for the man who cannot afford to be tied to his office.
- Equally suitable for large or small concerns.
- Low purchase price—virtually no indoor wiring—low rental terms.

Write or 'phone for further particulars — WE CAN BE FOUND IN TEN SECONDS

personal call

(the 'Peep Peep' in the Pocket)

THE ONLY STAFF LOCATION SYSTEM WORTH INSTALLING

MULTITONE ELECTRIC COMPANY LIMITED
12/20 UNDERWOOD STREET LONDON N.1. TELEPHONE: CLERKENWELL 8022

Reduce your press tool costs with the HUNTON

UNIVERSAL BOLSTER OUTFIT

In addition to the range of Punches and Dies $\frac{1}{16}$in. to $3\frac{3}{4}$in. dia. available from stock, some of the tools usually required in the Radio and Electronic Industries have been standardised for use with the Hunton Universal Bolster Outfit. Illustrated here are a few which can be supplied quickly or from stock.

In London and Home Counties, ask for a practical demonstration in your own works.

Write for illustrated brochure W.W.1.

HUNTON LTD.

Phoenix Works,
114-116, Euston Road, London, N.W.1

Telephone: EUSton 1477 (3 lines).
Telegrams: Untonexh, London.

Is this the answer?

P.O. TYPE 3000

The most versatile relay available today.
Coils up to 120,000Ω
Spring Set Insulation up to 5KV

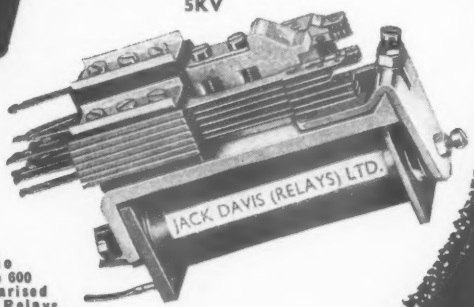

RELAYS

Used all over the world for

- METER PROTECTION
- TIME DELAY
- OVERLOAD TRIPS
- ALARM SYSTEMS
- FLASHING & PULSING
- PROCESS CONTROL
- TIMING DEVICES
- MAINS FAILURE PROTECTION
- COMPLEX OR SEQUENCE SWITCHING
- SELECTION & COUNTING SYSTEMS
- HIGH VOLTAGE SWITCHING

Are you aware of the variety of contact build-ups we can assemble? Your problem may not be as bad as it seems if you take advantage of our wide experience in the unlimited uses of this adaptable product.

- Quotations by return
- Prototypes within 48 hours
- Good delivery guaranteed

Also
Type 600 Polarised A.C. Relays
High Speed Uniselectors
Key Switches
Latching Relays
Magnetic Counters
To R.C.S. and R.C.L. Specification if Required.

Consult the Specialists!

Jack Davis (Relays) Ltd.
(DEPT. W.) TUDOR PLACE, LONDON, W.1
TELEPHONES: MUSEUM 7360 — LANGHAM 4821

ABILITY
RADIO PRODUCTS
EDDYSTONE
TRADE MARK
EDDYSTONE
VHF & UHF
(A M & F M)
Communications
Receivers
del 770R.
19-165 Mc/s.
770U.
Mc/s.
STRATTON & CO. LTD., BIRMINGHAM, 31

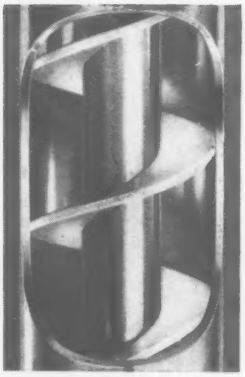

Illustrated is the HM.10. Helical Membrane Cable, which has a power handling capacity of 20 kW at 100 Mc/s.

Many well-known companies in the field of electronics have turned to Telcon for advice on the all important applications for Telecommunications. The knowledge and experience of Telcon staff—scientists, research engineers, chemists, cable designers and technicians, which has been gained in all parts of the world, is always at the service of cable users and equipment designers.

The Telcon Contracts Department is organised to supervise or undertake the installation of any of the more highly specialised types of cable manufactured. Its services are particularly valuable in cases where unfamiliar techniques are involved.

Cables for Telecommunications

Coaxial and balanced pair cables for telephonic communications are in standard production, as well as very low loss Helical Membrane Cables, for Multi-channel Radio links and Television Transmitting Feeders, etc.

You are welcome to full details and specifications of any of these types. When writing please quote reference WW.

TELCON

TELCON CABLES

THE TELEGRAPH CONSTRUCTION AND MAINTENANCE CO. LTD.

Enquiries to:— Sales Division, Mercury House, Theobald's Rd, London, W.C.1. Telephone: HOL 8711.

Branches at: CARDIFF·DUDLEY·MANCHESTER·NEWCASTLE·NOTTINGHAM.

An Audio Frequency Cable for local distribution purposes. These types can be installed underground, overhead or underwater, as required.

"YOU CAN RELY ON US"

Stockists of all Radio and Electronic components for manufacturers, laboratories, Educational authorities and the amateur

THE NEW AVO MULTIMINOR

Price **£9.10.0** Leather Case **32/6**
or 9 payments of **23/3**
or Deposit **63/4** and 6 payments of **22/2**

COSSOR 3v 3W Hi-Fi Amplifier Kit

Complete with twin speakers
Beautifully kitted and printed circuit.
£9.15.0 or Deposit **65/-** and 6 months at **23/4**
or Deposit **23/10** and 8 months at **23/10**

ALL OTHER AVO INSTRUMENTS IN STOCK

RADIO SERVICING COMPANY

82, SOUTH EALING ROAD, LONDON, W.5 *Telephone : EAL. 5737*

Next to South Ealing Tube (TURN LEFT) 9 to 6 p.m., Wednesday 1 o'clock.

scintillating sound

There are more features in the new Simon SP.4 than have ever before been gathered into any portable tape recorder. Exclusive to the SP.4 is the Simon Automatic Deck, fully 'push-button-controlled' and incorporating automatic tape reversal. A 10-watt ultra-linear amplifier adds to the technical excellence which is matched by elegant styling, and made even more attractive by a price that completely belies the outstanding performance. If you really appreciate first-class recorded sound, you will be thrilled to hear the Simon SP.4.

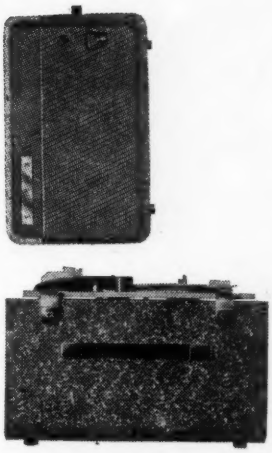

The lid is detachable. Both case and lid are covered with genuine Rexine in attractive dual tone colours. Styling: Peter Bell, M.S.I.A.

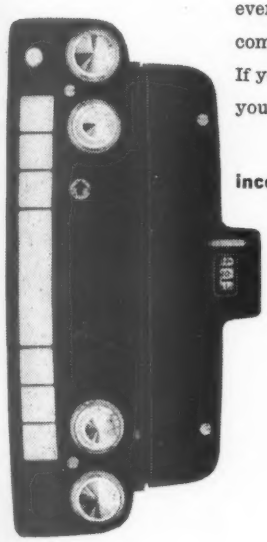

incorporating the new Simon fully automatic tape deck

and these exclusive features:

AUTOMATIC TAPE REVERSAL *without button pressing or spool transposing*

3-WAY MIXING FACILITIES on both record and playback

10 WATTS OUTPUT from ultra-linear push-pull amplifier

PUSH-PULL OSCILLATOR reduces noise and hum to minimum

BASS AND TREBLE LIFT AND CUT with independent controls

ERASE RECORD 'safety button'

SYNCHRONOUS MOTOR mains frequency controlled for accurate speed

ACCURATE TAPE POSITION INDICATOR based on linear tape scale

CATHODE RAY MAGIC EYE for 'pin-point' modulation

simon SP.4

high fidelity TAPE RECORDER

Send this coupon NOW for literature on the Simon SP.4

CADENZA

ribbon microphone



. . . to do justice to the excellence of the SP.4.

Dual impedance head, output sensibly flat between 50-12,000 cps. In handsome presentation case, head only or with tripod desk stand.

TO SIMON SOUND SERVICE LTD.
46-50 George Street, Portman Square, London, W.1.

Please send me literature on the Simon SP.4

NAME _____

ADDRESS _____

_____

95 GNS

My nearest dealer is:

NAME _____

ADDRESS _____

_____ F.6.

TA 294

XUM

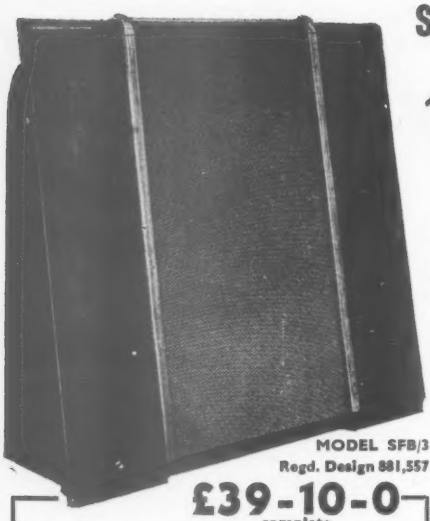

MODEL SFB/3
Regd. Design 881,557

£39-10-0
complete

Tropical model made with resin-bonded plywood can be supplied at £2 extra. Choice of Wulnut, Oak, Mahogany and Maple veneers. When fitted with the WMTI Matching Transformer (cost 13/6) this model will give full domestic volume from any good FM receiver.

SUCCESS STORY FROM AMERICA
ABOUT THE

Wharfedale MODEL SFB/3

Alexandria, Virginia,
February 17, 1958

Dear Mr. Briggs,

I am pleased to inform you that I am an owner of your Wharfedale Hi Fi Baffle, Model SFB/3, in mahogany, Warwick style. Your speaker system was bought unseen and unheard but my experience with your speakers and your work plus the company's advertising left no doubt in my mind that what you were offering was what I had been looking for in speakers for a long time.

Since receiving the same, with several months of music-making, I can say with all sincerity that the Wharfedale speaker is the answer to my long-sought desire. It may also interest you that I was the first one in the metropolitan Washington area to have such an unusual speaker, which harmonises with our furniture and can be placed in any location of the room, quite versatile. Frankly, I think it is very extraordinary.

Cordially yours,
C.D.K.

★ **Free-standing and easily moved.**
★ **Resonance free, sandfilled baffle.**
★ **Frequency range 30 c/s to 20,000 c/s.**

Specification: Size 34 in. x 31 in. x 12 in. Weight 64 lb. Bass Resonance 30/35 c/s. Impedance 8/15 ohms. Max. input 15 watts

DESCRIPTIVE LEAFLET SHOWING RESPONSE CURVES WILL BE SENT FREE ON REQUEST

Made and guaranteed by
WHARFEDALE WIRELESS WORKS LTD., IDLE, BRADFORD, YORKS. Tel. Idle 1235-6 'Grams: Wharfdel, Idle, Bradford

A GOOD INSTRUMENT

deserves an APEX case

PRICES FROM **58/-**

Send for fully illustrated Brochure and Price List of Apex Cases and Handles to

KECO

Kimberley Engineering Co. Ltd.
HORSHAM ROAD · DORKING · SURREY · Phone: Dorking 3720

A NEW INTERMEDIATE POWER TRANSISTOR

Bridges the gap between audio and power types

GOLTOP **Type V15/20 IP and V30/20 IP**

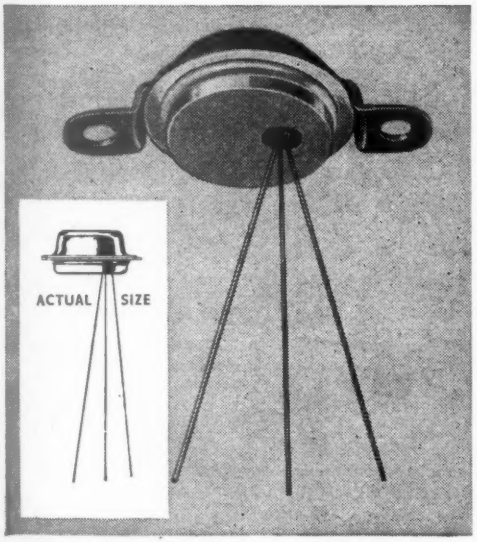

Available now for development purposes

The Newmarket Transistor Company, first to make RF transistors in Britain on a commercial scale and first again with power types, now introduces a new intermediate power transistor which fills the gap between the general purpose audio and 10-Watt power types.

Perfectly sealed by a cold welding process, this new unit has a special clip mounting which eliminates large fixing studs. Maximum power dissipation is obtained with the unit on a heat sink but a useful output is obtainable with the transistor alone, making it ideal for use with printed circuit boards.

Abridged data

MAXIMUM RATINGS

Collector Voltage (Vcb)	DC or Peak, 15V (V15), 30V (V30)
Collector Current (Ic)	DC or Mean, 2A
Junction Temperature	75°C.

Collector Power Dissipation—
(1) On 9 sq. in. of 16 swg aluminium, 2 Watts.
(Derating 40 mW/°C. rise above 25°C.)
(2) transistor only in free air, 0.5 Watt.

Thermal Resistance (Junction to mounting surface)—10°C./W.

CHARACTERISTICS

Collector cut-off current		50μA (max.)
Current gain (Beta)	−20mA	40 (typical)
	−150mA	25 ,,
	−500mA	16 ,,
Alpha cut-off frequency	−20mA	250 Kcs (Typical)

Typical applications

R.F. TRANSMITTERS
Output powers up to 3 Watts are possible at frequencies up to 500 Kc/s.

AMPLIFIERS
Class A or B amplifiers operating at audio or radio frequencies.

DRIVER AMPLIFIERS
Characteristics are ideal for driving Goltop V15 and V30 power transistors in push-pull.

SWITCHING CIRCUITS
The maximum mean current rating of 2 Amps permits the use of large pulse currents as required in servo control systems.

OSCILLATORS
Ultra-sonic and low RF power oscillators up to 500 Kc/s.

D.C. CONVERTERS
Outputs up to 6 watts per transistor.

STABILISED POWER SUPPLIES
Can be used for the series elements of supplies delivering up to 2 Amps or as drivers in larger units.

NEWMARKET TRANSISTORS

All enquiries to:
Newmarket Transistor Co Ltd
Exning Road, Newmarket, Suffolk
Telephone: Newmarket 3381-4

D

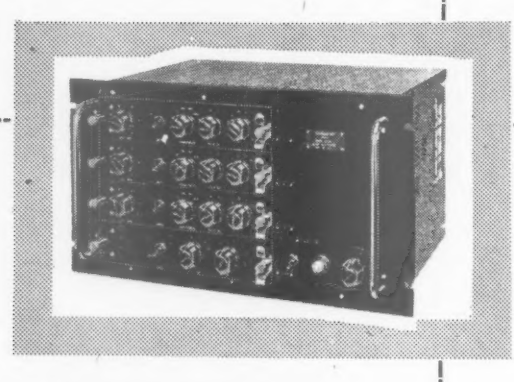

coincidence unit type 1036c

The new Dynatron Coincidence Unit Type 1036C contains a 3 channel coincidence circuit which may be used in any one of the following arrangements :

I Channels 1 and 2 in coincidence.
II Channels 1 and 2 in coincidence, the output being in coincidence with channel 3.
III Channels 1 and 2 in coincidence, the output being in anti-coincidence with channel 3.
IV Channel 3 in coincidence with channels 1 or 2.
V Channel 3 in anti-coincidence with channels 1 or 2.

The three input channels and the coincidence mixer are sub-units which are removable from the front panel. The complete unit is constructed on a 10½ inch Post Office rack panel.

DYNATRON

NUCLEONIC & ELECTRONIC DEPT.
Dynatron Radio Ltd., Maidenhead, Berkshire

Scalers · Pulse Generators · Pulse Analysers · Power Units · Probe Units · Pulse Amplifiers · Instrument Racks

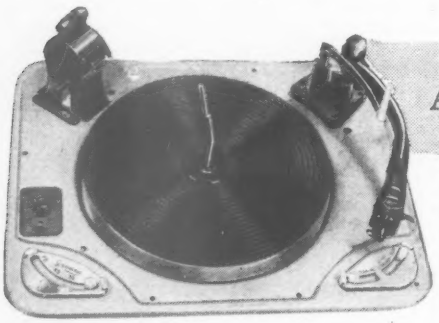

Another *"Winner"* for Garrard

THE HIGH QUALITY R.C. 98/4 RECORD CHANGER

Will play automatically any number of records up to eight of any one of the following types at each loading: 10″ or 12″ at 78 r.p.m.; 7″, 10″ or 12″ at 33-1/3 r.p.m.; 7″ at 45 r.p.m. . . Manual control for playing records singly. . . All four speeds adjustable by a new type of electrical speed control. The adjustment provides approximately plus or minus 2½% of nominal speed. . . Main switch fitted with a specially designed suppressor unit to eliminate extraneous noises in the reproducer when the changer switches on or off. . . Supplied with two record spindles, one stepped to play records automatically, the other a short spindle together with a centre hole adaptor for playing records manually. A large record spindle Type LRS3 for playing 7″ 45 r.p.m. large hole records is available as an optional extra. . . Intermediate Drive Wheel automatically retracts when changer switches off, also during speed change. . . Adjustment for pickup stylus pressure. . . Aluminium die cast pickup arm incorporating the Garrard plug in pickup feature, facilitates the choice of a wide range of pickups. . . Fitted with pickup muting switch. . . Single voltage range 100-130 or 200-250 volts to order. A.C. only. . . Frequency range 50 or 60 cycles according to the motor pulley fitted. . .



GARRARD

An illustrated catalogue of the whole Garrard range is available on request.

Garrard
AUDIO PERFECTION
THE GARRARD ENGINEERING & MANUFACTURING CO. LTD., SWINDON, WILTSHIRE

getting down to it

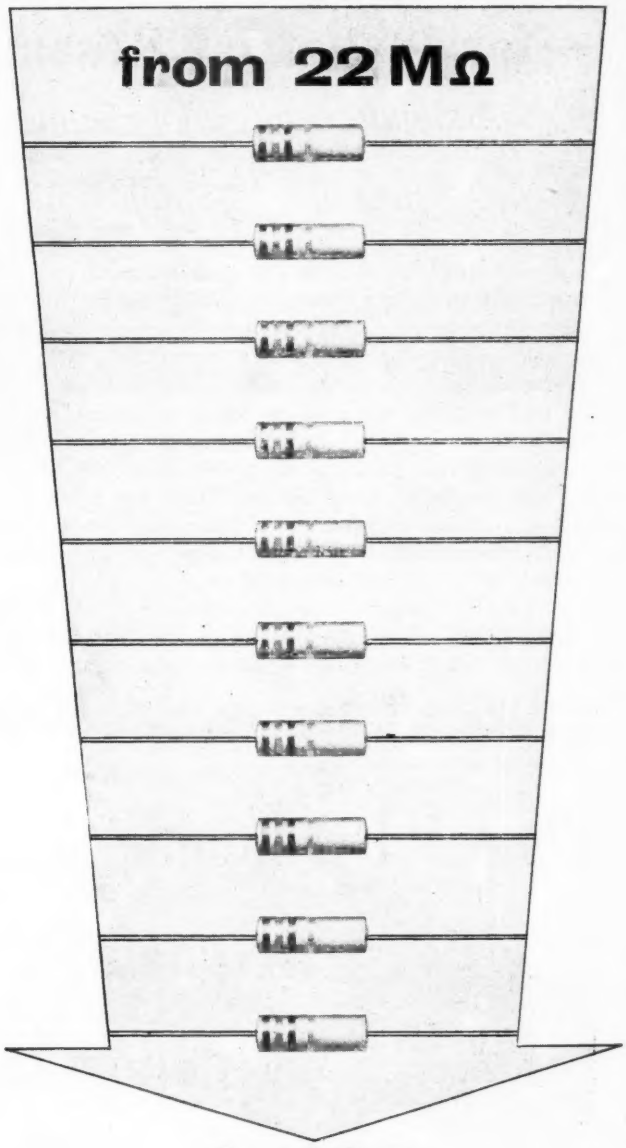

to 10 Ω

We are pleased to announce that our range of BTA (1W.) and BTS (½W.) resistors has been extended down to 10Ω. We can now supply these resistors from stock in the preferred values from 10Ω to 22MΩ.

Please write for full details.

DUBILIER

DUBILIER CONDENSER CO. (1925) LTD., DUCON WORKS, VICTORIA ROAD, NORTH ACTON, LONDON W.3.
Phone: ACOrn 2241
Grams: Hivoltcon Wesphone London.
DN 204A

—for Industrial Research

A simultaneous dual-channel Tape Recorder

Series 3C/FN

THE Ferrograph Series 3C/FN, illustrated here, is a simultaneous dual-channel instrument, using staggered heads, which offers special facilities to those engaged in medical, aeronautical and other scientific research. Besides the normal ability to record simultaneously time pulses on one track and intelligence on the other, it becomes immediately obvious that many forms of comparative measurement, stereophonic sound, or indeed, any two activities capable of being translated into electrical phenomena (within its frequency and phase shift limitations) can be recorded simultaneously and replayed when required. Thus, the scope of such an instrument, when used for Research purposes, is almost unlimited.

Full details and specification of this and other Ferrograph Tape Recorders will be sent on request.

The Incomparable **Ferrograph**

BRITISH FERROGRAPH RECORDER CO. LTD., 131 Sloane Street, London, SW1. Tel: SLOane 2214/5 & 1510

A Subsidiary of Wright & Weaire Limited

Choose RD Junior . . .



AMPLIFIER



MK II CONTROL UNIT

Britain's most popular Hi-Fi equipment.

PRICES	£	s.	d.
Amplifier	17	0	0
MkII Control Unit	11	0	0
FM Unit (Self Powered)	25	19	0
Corner Horn Enclosure	22	7	6
Fitted PM6 Unit	41	5	6
Table Cabinet	14	10	0

Full Illustrated Literature may be had free and post free on request.

Trade and Export enquiries invited.



FM UNIT

ROGERS DEVELOPMENTS (ELECTRONICS) LTD.

"RODEVCO WORKS" • 4-14 BARMESTON ROAD • CATFORD • LONDON, S.E.6

Telephone: HITher Green 7424 *Telegrams: RODEVCO LONDON SE6*

Build up Complex Control Systems with SERVOMEX Units

Ideal for experimental use, education, and for specialised "one off" applications

H.T. Unit D.C. 68

A general purpose anode and heater supply unit giving 250-350 volts D.C. at 0-150 mA and 85 volts D.C. for a voltage reference; both of these are highly stabilised. There are 3 unstabilised 6·3 volts A.C. outputs. Particularly designed for robustness and absence of 'ringing' when full load is switched on or off. Suitable for 105 to 250 volts A.C. 45-65 c/s.



Servo Amplifier S.A. 61

High gain D.C. amplifier for driving standard 80 mA field windings. Can be powered by D.C. 68 or any other conventional H.T. unit. Balanced circuit throughout to reduce drift. Gain 2 amperes per volt.



Armature Supply Unit A.S. 69

High impedance source for feeding the armature of D.C. Servo motors using the 'constant current' technique. Nominal output 0.48 or 0.35 amps. Suitable for 105-250 volts A.C. 45-65 c/s.



With the aid of these three basic Servomex units, servo-control systems can be assembled by the user to meet his own specialised requirements. This will save time and money, and will give superior reliability since these units have already been thoroughly tested in our own installations. *Write for technical data sheets.*

TYPE	HOME	EXPORT
SA.61	£17	£17
DC.68	£35	£40
AS.69	£22	£27

Servomex Controls Ltd.,
Crowborough Hill, Jarvis Brook, Sussex. Crowborough 1247

There can be no doubt whatsoever that "Symphony" products represent the greatest value-for-money on the market to-day

No. 1 "SYMPHONY" AMPLIFIER Mk III
With independent and complete control of the treble, bass and middle frequency bands. 5 watts output.



12 GNS

No. 2. "SYMPHONY" AMPLIFIER Mk. III
As above, but 10 watts push-pull triode output

17 GNS

"SYMPHONY" AMPLIFIERS with REMOTE CONTROL
Enables the amplifier proper to be set in the bottom of a cabinet whilst the controls are mounted conveniently higher up. 2 GNS extra.

No. 2. PUBLIC ADDRESS AMPLIFIER Mk. III. 15 GNS

No. 1. "SYMPHONY" FM TUNER.
Switched model with AFC 9½ GNS. in kit form.



£15/8/-

No. 2. "SYMPHONY" AM/FM TUNER 26 GNS

"SYMPHONY" AM/FM RADIOGRAM CHASSIS, including elliptical speaker 26 GNS

GRAMOPHONE & TRANSCRIPTION UNITS by: Garrard, Collaro, Lenco, Woollett, Connoisseur, B.J., etc.

NORDYK CABINETS. All models stocked. **INSTALLATIONS IN CABINETS** We can supply any equipment advertised in any cabinet advertised.

COLUMN LOUDSPEAKER CABINETS To meet the new demand for stereophonic reproduction. 5ft. high, beautifully made in thick white-ply (unstained). Fantastic acoustic results. 13 GNS

"SYMPHONY" BASS REFLEX CABINET KITS. 30in. high, consist of fully-cut, ¾in. thick, heavy, inert, non-resonant, patent acoustic board, deflector plate, felt, all screws, etc., and full instructions. 8in. Speaker Model, 95/-. 10in. Speaker Model, 107/6. 12in. Speaker Model, 117/6. Carriage 7/6. Ready built 15/- extra.

WB. PRELUDE CONTEMPORARY Range of Cabinets stocked.
SPEAKERS by: Wharfedale, Goodmans, Whiteley (W.B.), Lorenz, Grampion, C.Q., etc.
"SYMPHONY" TAPE RECORDERS—NEW MARK II MODELS with redesigned improved amplifier giving 15 Kc/s response.

Table Model. In walnut, oak or mahogany cabinet, same price.

Portable Model 54 GNS

ALL-TRANSISTOR 4-SPEED PORTABLE RECORD PLAYER. High-Fidelity reproduction, ample output, extreme economy (two small batteries), outstanding value at 25 GNS. Ideal for caravans, boats, country cottages, etc.
Send 6d. in stamps for new comprehensive Hi-Fi Catalogue showing you how to save one-third cost!

NORTHERN RADIO SERVICES

Dept. W. 11 Kings College Road, Adelaide Road, London, N.W.3. *PRImrose 3314*
Tubes: Swiss Cottage and Chalk Farm.
Buses: 2, 13, 31, 113 and 187

THE WEYRAD AM/FM RECEIVER

THIS RECEIVER WHICH HAS BEEN SPECIALLY DEVELOPED FOR THE AMATEUR CONSTRUCTOR PROVIDES COMPLETE COVERAGE OF THE SOUND BROADCAST BANDS—LONG, MEDIUM AND SHORT WAVE AM. WITH 87.5-100 Mc/s. V.H.F. FOR FM. WE HAVE PRODUCED A FULLY ILLUSTRATED BOOKLET WHICH GIVES INFORMATION ON THE ASSEMBLY AND ALIGNMENT OF THE 4-BAND SEVEN-VALVE RECEIVER, INCLUDING CHASSIS LAYOUT, CIRCUITS AND POINT-TO-POINT WIRING DIAGRAM.

★ "WEYRAD" B.61 COIL PACK, P.23 I.F. TRANSFORMERS, T.S.61 TUNING SCALE, Q2 I.F. FILTER, E.822 MAINS TRANSFORMER AND E.823 OUTPUT TRANSFORMER.

★ ALUMINIUM CHASSIS WITH ALL PUNCHING AND BENDING COMPLETE.

★ DESIGNED FOR LATEST TYPE MULLARD VALVES.

★ RECEIVER OUTPUT CAN BE MODIFIED FOR USE AS A RADIO FEEDER FOR QUALITY AMPLIFIERS.

THE BOOKLET & PRICE LIST ..... 2/6d.

ILLUSTRATED FOLDER OF A.M. COMPONENTS..... 3d.

WEYMOUTH RADIO MANUFACTURING CO., LTD.

CRESCENT STREET, WEYMOUTH, DORSET

UNDOUBTEDLY . . .

" For inductance or capacitance measurements the measuring bridge is energised by the output from a valve oscillator, the out-of-balance voltage from the bridge being applied to the built-in selective amplifier-detector and moving-coil indicator, while for resistance measurements the indicator is used directly as a centre-zero galvanometer, the necessary d.c. for the bridge being derived from the power pack supplying the oscillator and detector used for inductance and capacitance measurements."

One of the problems of the age is how to keep up with the younger generation. One can support the shame of being unable to help with homework, but the prospect of having to admit ignorance of electronic equipment is intolerable. For instance, what do you know about the Marconi Universal Bridge Type TF 868A? Could you impress our young friend with an authoritative description of the instrument's ingenious mechanical design which provides single-dial measurement of L, C, and R? You owe it to yourself to be really up-to-date about Marconi Instruments—after all, they are important tools of your trade. Start with the TF 868A. Our leaflet G112 contains full details, and we'll gladly send you a copy.

UNIVERSAL BRIDGE
Type TF 868A

Measures inductance or capacitance at 1 or 10 kc/s, resistance at d.c. Measurement Ranges: 1 μH to 100 henrys, 1 μμF to 100 μF, 0.1 ohm to 10 MΩ. Q Range: 0.1 to 10 at kc/s, 1 to 100 at 10 kc/s. Tan δ Range: 0.001 to 0.1 at 1 kc/s, 0.01 to 1.0 at 10 kc/s.

MARCONI INSTRUMENTS

AM & FM SIGNAL GENERATORS · AUDIO & VIDEO OSCILLATORS · FREQUENCY METERS · VOLTMETERS POWER METERS · DISTORTION METERS · FIELD STRENGTH METERS · TRANSMISSION MONITORS DEVIATION METERS · OSCILLOSCOPES, SPECTRUM & RESPONSE ANALYSERS · Q METERS & BRIDGES

MARCONI INSTRUMENTS LTD · ST. ALBANS · HERTFORDSHIRE · TELEPHONE: ST. ALBANS 56161

London and the South: Marconi House, Strand, London, W.C.2. Tel: COVent Garden 1234
Midlands: Marconi House, 24 The Parade, Leamington Spa. Tel: 1408 *North:* 23/25 Station Square, Harrogate. Tel: 67455
WORLD-WIDE REPRESENTATION

TC 112

Sound sense about sound value

We wouldn't exactly advise you—a connoisseur of sound—to give your ears for a piece of Dulci equipment. But it is a fact that more and more enthusiasts are finding out for themselves that when all makes and combinations of Hi-Fi apparatus have been tested, no manufacturer can offer better quality reproduction at more sensible prices.

DPA 10 Power Amplifier.
10-14 watts. Ultra linear with choice of control unit or pre-amplifier. A superb laboratory-designed amplifier, modern-styled and of precision quality for domestic use. Incorporates every facility for the reproduction of high quality sound from radio, records, tapes or microphone.
DPA 10 only £12.12.0.
DPA 10 with control unit £15.15.0.
DPA 10 with Pre-amplifier £19.19.0.



Model H11 AM/FM Tuner.
A combined and self-powered AM/FM Tuner, Control Unit and Audio Pre-Amplifier in one chassis, designed in detail for fine performance. Seven channel selector matching to L.P. and 78 r.p.m. Records and Tape Replay. FM (VHF)—Short—Medium and Long Wavebands. Independent Bass and Treble Controls giving 15db lift and out with indicated level response position.
Price : £29.3.10 inc. tax.

GA 4 High Fidelity Amplifier
with control panel 6in. × 4in., switch matching to Radio, L.P. and 78 r.p.m. records. Bass, Treble and Volume controls. **Price : £9 . 9 . 0.**

DISTINCTLY **DULCI** QUALITY PRODUCTS

THE DULCI COMPANY LIMITED, 97-99 VILLIERS ROAD, LONDON N.W.2. TEL.: WILLESDEN 6678/9

HIVAC THE SCIENTIFIC VALVE

Hivac miniature barretters

XB1 and XB2

These highly efficient miniature barretters can be used in a variety of applications; for example, to regulate the heater current of a number of 6.3V 0.3A valves operated from a suitable supply. They can be mounted in any position where air can circulate freely.

For full details of these two barretters, send for Data Sheets XB1 and XB2.

XB1 Operating voltage range from 9V to 16V. Rated current, 300 mA.

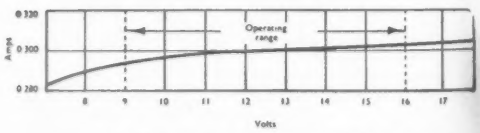

XB2 Operating voltage range from 7.4V to 12.4V Rated current, 305 mA.

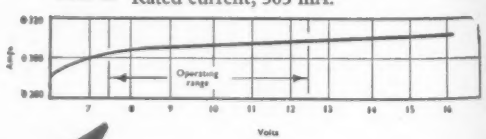

Our Technical Service Department will be glad to supply further information, and assist in any problems arising from the use of Hivac barretters.

Hivac Limited STONEFIELD WAY · SOUTH RUISLIP MIDDLESEX
A member of the Automatic Telephone & Electric Group. Ruislip 2366

B2

CAPACITORS

for all applications

TYPES

DRY ELECTROLYTIC
METALLISED PAPER (HUNTS PATENTS)
METALLISED PLASTIC FILM (HUNTS PATENTS)
PLASTIC FILM • FOIL & PAPER
SILVERED MICA • STACKED MICA
CERAMIC • POWER CERAMIC
TRANSMITTING AND SPECIAL R. F. TYPES

APPLICATIONS

RADIO AND TELEVISION EQUIPMENT
ELECTRONIC EQUIPMENT
POWER FACTOR IMPROVEMENT
CAPACITOR MOTORS • FLUORESCENT LIGHTING
PHASE SPLITTING • H.F. AND R.F. HEATING
IGNITION AND INTERFERENCE SUPPRESSION
TELEPHONE INSTALLATIONS

A. H. HUNT (Capacitors) LTD., WANDSWORTH, LONDON, S.W.18. Tel: BATtersea 1083

Factories also in Essex, Surrey and North Wales.

PRINTED CIRCUITS

By

PIONEER

— THE NAME OF QUALITY —

OFFER A COMPLETE SERVICE IN PRINTED CIRCUITS WHICH INCLUDES:—

1. **DESIGN & DEVELOPMENT FROM SPECIFICATION OR CIRCUIT DIAGRAM.**
2. **PROTOTYPE SERVICE.**
3. **FULL PRODUCTION FACILITIES.**

CAPACITY OF THE COMPANY ALSO INCLUDES:—

4. **MACHINE SHOP, & SHEET METAL FABRICATION.**
5. **PRODUCTION ASSEMBLY LINE.**

PIONEER PRINTED CIRCUITS

—— DIVISION OF ——

RADAR ELECTRONIC EQUIPMENT LTD.

(AID & ARB APPROVED)

COLNE-WAY, WRAYSBURY Rd.
STAINES • MIDDLESEX.
Tel :- WRAYSBURY 3194

WAFER SWITCHES TO SPECIFICATION

As we specialise *only* in the manufacture of small quantities of wafer switches (to individual specification) we guarantee competitive prices and fast delivery.

SWITCHES TO PUBLISHED DESIGNS (FROM STOCK)

G.E.C. 912-PLUS

S1 (14061/B1) } 14/6 pair
S2 (14062/B1) }
S4 (SS/556/1) ... 11/6
S5 (SS/556/2) ... 10/6

Mullard Tape Amplifiers

Amplifier "A"
SS/567/A, SS/567/B, SS/567/C } 32/6 the set

Amplifier "B"
SS/567/A ... 16/6

G.E.C. 88-50 Pre-Amplifier

Input Selector (state number of positions) ... 12/-
Treble Selector ... 7/9

Write for Price List and Design Chart.

SPECIALIST SWITCHES

23 Radnor Mews - Sussex Place
London W2 - AMBassador 2308

Suppliers to the leading electronics, aeronautical and automobile companies and to research institutions, the G.P.O. and Universities.

TRANSFORMERS

for every requirement

Electronics
Transmitters
Radar
Test equipment
M.V. discharge tubes
R.F. heating
L.V. heating

Range 1 volt—35 K.V. *1 M/A—1,000 amps*

STANDARD OR TROPICAL FINISH

We are on Admiralty and Ministry of Supply lists and A.I.D. approved

Enquiries to:

STEWART TRANSFORMERS Ltd.
75 KILBURN LANE, LONDON, W.10 · LADbroke 2296/7

Two New 5 inch instrument tubes

These two new instrument tubes are being produced by ETEL to fulfil the requirements of a variety of applications where a 5-inch tube is needed.

Both the 5BUP1 and 5BVP1 are high quality p.d.a. tubes with flat screens and side plate connections. Their range of operating voltages is wide and is an important feature of their versatility.

The screen of the 5BVP1 is aluminized, and the higher operating voltages allowed with this tube suit it for recording faster phenomena.

Full data is available upon request to the address below.

Abridged Data

Screen

P1 green fluorescence medium persistence (The screen of the 5BVP1 is aluminized.) Other screens are available to order.

Capacitances

X1 to X2—1.7pF
Y1 to Y2—1.7pF
One X plate to all other electrodes less other X plate—4.0pF.
One Y plate to all other electrodes less other Y plate—3.0pF.

Heater

Vh = 6.3V Ih = 0.55A

Typical Operation

	5BUP1	5BVP1
Va1	2,000V	4,000V
Va2 . . . . (for focus)	500V approx.	1,000V approx.
Va3	2,000V	4,000V
Va4	4,000V	8,000V
Vg	-28 to -60V	-56 to -120V
Sx	0.35mm/V	0.17mm/V
Sy	0.58mm/V	0.29mm/V

ETEL **CATHODE RAY TUBES**

ELECTRONIC TUBES LIMITED

KINGSMEAD WORKS · HIGH WYCOMBE · BUCKS · TEL: HIGH WYCOMBE 2020
ELT 8a

Armstrong AM/FM Radiogram chassis

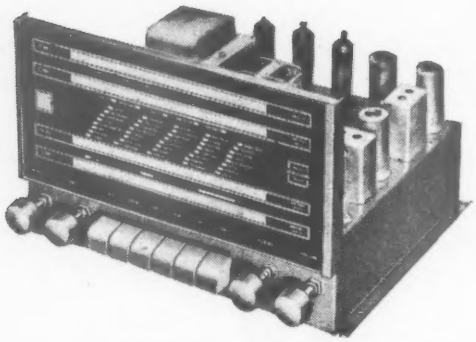

MODEL PB 409 *(illustrated)* **28 GNS.**

A High Quality Radiogram replacement Unit

- *9 valves*
- *6 watts Push-Pull output*
- *Negative Feedback*
- *4 wavebands including VHF*
- *Quick action Piano Key selectors*
- *Separate Bass and Treble controls*
- *Magic Eye*

MODEL AF 105 £37

AM and FM Tuners and High Fidelity Amplifier on one compact chassis

- *10 valves*
- *10 watts Push-Pull output*
- *20 dB Negative Feedback*
- *5 wavebands including VHF*
- *Independent wide range Bass and Treble controls with visual indicators*
- *Magic Eye*

WHETHER YOU REPLACE THE "WORKS" IN YOUR RADIO OR RADIOGRAM . . .

WHETHER YOU BUILD A NEW RADIOGRAM THAT IS ALL YOUR OWN WORK . . .

WHETHER YOU CAN'T BE BOTHERED WITH THE WOODWORK AND JUST PUT IT ON A SHELF . . .

AN ARMSTRONG IS THE ANSWER.

Post this coupon or write for descriptive literature and details of Home Trial facilities, Credit terms and Guarantee to Armstrong Wireless and Television Co. Ltd., Warlters Road, Holloway, N.7.

Tel: NOR 3213 BLOCK CAPITALS PLEASE

NAME.....

ADDRESS.....

.....

Demonstrations at our Holloway Showroom 9-6 Weekdays and Saturdays. WJN

Andec LIMITED

ELECTRONIC ENGINEERS & TRANSFORMER SPECIALISTS

TRANSFORMERS

Up to 50 K.V.A.

F.H.P. MOTORS

ELECTRONICS

Your enquiries are invited and we shall be pleased to supply you with a complete catalogue.

ANDEC LIMITED

A.I.D., A.R.B. approved

BENNET ROAD · READING · ENGLAND

Tel. 82401/2

ASK ARTHURS FIRST

LARGE STOCKS OF VALVES and C.R.T.s. METERS, Avo, Advance, Taylor and Cossor Oscilloscopes in stock. AMPLIFIERS, Leak, Trix and Quad. GRAM UNITS, Garrard and Collaro. Collaro TRANSCRIPTION UNIT 2010PX.

LOUDSPEAKERS, Goodmans, Wharfedale, WB Tannoy and leading makes. PICK-UPS and STYLI of most makes. TAPE RECORDERS, Grundig, Philips, Truvox, Playtime and Ferrograph.

LATEST VALVE MANUALS

Mullard, 10/6; Osram and Brimar No. 6, 5/- each; Osram Part 2, 10/-.

Postage 9d. each extra.

PARTICULARS ON REQUEST

Terms C.O.D. OR CASH with order.

Arthurs EST. 1919

PROPS: ARTHUR GRAY, LTD.

GRAY HOUSE 150-152 CHARING CROSS ROAD, LONDON, W.C.2

TEMple Bar 5833/4 and 4765 *Cables: TELEGRAY, LONDON*

PERFORMANCE ASSURANCE WITH

COSSOR

PRINTED CIRCUITS

AN INSTRUMENT RANGE IN KIT FORM

Q. *Why has Cossor Instruments decided upon this innovation?*

A. To make available a range of first-class measuring instruments **at a considerable saving in cost to the Buyer.**

Q. *Are Kit instruments inferior in performance to their Factory-built equivalents?*

A. Certainly not. If assembled and wired exactly in accordance with the Manual of Instructions.

Q. *A certain skill must, surely, be required to build these instruments?*

A. None beyond the ability to use a small soldering iron.

Q. *How can a performance specification be maintained without setting up test equipment?*

A. Largely by the use of PRINTED CIRCUITS which allow no interference with the layout of critical parts of the circuit.

Q. *How many Kit instruments are at present available?*

A. Three. Two Oscilloscopes, a Single-Beam and a Double-Beam, and a Valve Voltmeter. Others will follow shortly.

Q. *Could I have more information on these interesting instruments?*

A. With the greatest of pleasure. Just write to:

Model 1071K ***Double Beam*** *Kit Oscilloscope*

List Price £69.0.0.
Hire Purchase Facilities.
Trade terms on application.

COSSOR INSTRUMENTS LIMITED

The Instrument Company of the Cossor Group

COSSOR HOUSE · HIGHBURY GROVE · LONDON, N.5

Telephone: CANonbury 1234 (33 lines) Telegrams: Cossor, Norphone, London Cables: Cossor, London

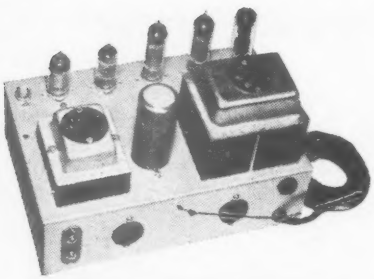

CUSTOM BUILT HI-FI

FROM a wide inquiry conducted among enthusiasts and trade experts, we have obtained a more accurate insight into the needs of music lovers than ever before. The result . . . our latest Hi-Fi amplifier—

THE NEW GRAMPIAN "TEN-FIFTEEN" AMPLIFIER This unit contains the up-to-the-minute developments in reproduction equipment for modern recording methods. Designed for luxury listening, the "Ten-Fifteen" produces a 10-watt output with a peak of 15 watts. There is a selection of three output impedances stabilised for long loudspeaker lines and electro-static speakers. Improved performance is given by the "grain orientated" output transformer.

CONTROL UNITS (with or without preamplifier)

CONTROL UNIT 580: for all high output crystal and magnetic pickups, fitted with a mains switch, pilot lamp, compensated volume control, bass and treble tone controls and six-position selector switch giving necessary compensation for R.I.A.A. and F.S. R.R., LP records, 78 new and 78 old recordings, radio and tape inputs.



Please write for leaflet on the complete Grampian high fidelity range.

CONTROL UNIT 582: with preamplifier for control flexibility is fitted with a compensated volume control and has provision for a microphone, can be used with any type of pick-up including low level reluctance types. There is a two-stage feed-back amplifier providing the correct compensation for 33⅓, 45 and 78 r.p.m. records, with independent bass and treble controls allowing complete tonal balance to be obtained. Separate input sockets are fitted at the rear for pick-up and radio whilst two variable controls are provided so that input level may be correctly adjusted. Two jack sockets are fitted on the front of the panel for tape input and output, for use in conjunction with a tape recorder having a built-in amplifier.

The 582 is fitted with a mains switch and pilot lamp. "Ten-Fifteen" Amplifier complete with 580 Control Unit,
price complete **£24 10 0**

Ten-Fifteen Amplifier complete with 582 pre-amplified control
price complete **£30 0 0**

GRAMPIAN REPRODUCERS LIMITED
17 HANWORTH TRADING ESTATE · FELTHAM · MIDDLESEX · ENGLAND
Telephone : FELtham 2657 *Cables : Reamp, Feltham*

Grampian

M. R. SUPPLIES Ltd.

(Established 1935)

Offer only first-class material at the most attractive prices and with prompt delivery. Careful packing. Satisfaction assured. Prices nett.

EXTRACTOR FANS. Very well made units at much below normal price. 200/250 v. A.C., induction motor, silent running, no interference. With mounting frame and back grille, ready for easy installation. With 8in. impeller, 12,000 c.ft./hr., **£5/5/-**. With 10in. impeller, 15,000 c.ft./hr., **£5/12/6** (despatch of either 3/6).

STUART CENTRIFUGAL PUMPS. All models from stock, 230/250 v. A.C. Complete direct-coupled motor-pump units, easily installed (full instructions with each). Examples: No. 10, duty 120/40 g.p.h. 5/20ft. head, **£8/10/-** (des. 3/6). No. 12, duty 600/200 g.p.h. 5/35ft. head—a very efficient unit, **£11/10/-** (des. 4/-). Other models up to 2,000 g.p.h. Also available certain models with stainless steel pumps. Please enquire.

SYNCHRONOUS TIME SWITCHES (Sangamo). 200/250 v. 50 c. In compact black plastic housing 4in. dia. by 3½in. deep, providing up to three on/off operations per 24 hours, with day-omitting device (use optional). Capacity 20 amps., therefore suitable for numerous electrical devices—radio, tape recorders, immersion heaters, electric fires, etc. Undoubtedly the finest value being offered today. **£5/8/6** (des. 2/-).

SYNCHRONOUS TIMER MOTORS. 200/250 v. 50 c. Compact units 2¼ × 1⅞ × 1½in. with 1in. shaft proj. Self-starting, high torque, 6 r.p.m. Suitable also for display turntables, **57/6** (des. 1/6). Also Sangamo **SYNCHRONOUS TIMER MOTORS,** 200/250 v. 50 c. Final speeds available from stock: 1 r.p.m., 1 r.p.h. and 12 r.p.h., any one **37/6** (des. 1/6).

GOVERNED MOTORS (Croydon). 200/250 v. A.C./D.C., 1/20th H.P., fitted centrifugal governor controlling speed to 2,000 r.p.m. Length 7in. with shaft proj. 1¼in. Limited offer of expensively made units at only **62/6** each, brand new (des. 3/-).

SHADED POLE INDUCTION MOTORS. Our comprehensive range of these useful motors (as listed in previous advertisements) now includes a limited offer of Metro-Vick, 200/250 v. A.C., 1,200 r.p.m., very silent running, with mounting flange—right for tape recorders. Brand new, **27/6** (des. 2/-).

G.E.C. OUTPUT TRANSFORMERS. Tapped 2k, 4k and 8k ohms impedance to 2-4 ohms speech coil. Suitable for push-pull, 5 watts rating. New, in makers' cartons, **8/6** (des. 1/6).

MORSE PRACTICE OUTFITS. High-grade key and buzzer on baseplate, taking standard 4½ v. box battery. **7/6** (des. 1/6).

MINIATURE BLOWERS. 12/24 v. D.C., 3in. long, 3in. dia. Powered by P.M. motor, 2in. long by 1½in. dia. **17/6** (des. 1/6).

COMPLETE SEWING MACHINE MOTOR OUTFITS. Definitely no better job at any price. We have large sales from recommendations. 200/250 v. A.C./D.C., fitted with latest radio/TV suppressors, including motor with fixing bracket, foot control, needle light with switch, belt, etc., and instructions for fixing to ANY machine. We still offer the complete outfit for only **£6/15/-** (des. 2/9).

F.H.P. GEARED MOTORS

We enjoy the highest reputation for rapid delivery of small GEARED MOTORS of the highest grade, with a remarkable selection from stock. Variable speed series wound and constant speed, capacitor/induction models, all reversible. Final speeds from 1 r.p.m. up to 840 r.p.m. and final torques up to 75lb./in. We have the pleasure of supplying these units to most of the large industrial concerns. Full details are given in our List GM/357—copy sent on request.

M. R. SUPPLIES, Ltd., 68, New Oxford Street, London, W.C.1
Telephone: MUSeum 2958

EDDYSTONE COMMUNICATION RECEIVERS

Model 840A illustrated
Cash Prices and Statutory Terms

Model	Cash Price	Deposit	8 Monthly Payments of
820	£31 18 0	£3 14 6	£3 14 6
870	£34 16 0	£4 1 6	£4 1 6
840A	£55 0 0	£6 8 4	£6 8 4
750	£78 0 0	£9 2 0	£9 2 0
888A	£110 0 0	£12 16 8	£12 16 8
680X	£120 0 0	£14 0 0	£14 0 0

Cash price if paid in 6 months by Bankers' order.
Carriage paid per passenger train.

Model 840A is for A.C. or D.C. 110/250 v.; 750 and 680X 110/240 v. A.C. These sets are the choice of the discerning professional and amateur users. Descriptive literature gladly forwarded.
Latest EDDYSTONE Component Catalogue 1/-.

The Eddystone Specialists

HP RADIO SERVICES LTD.

55 COUNTY ROAD, LIVERPOOL, 4
Telephone: AINTREE 1445 ESTAB. 1935
CALL US ON TELEX. 62-244

Especially designed for printed circuits...

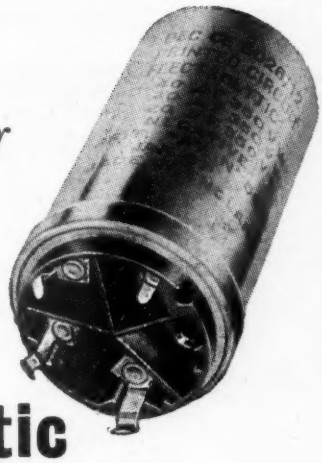

Plessey Electrolytic Capacitors

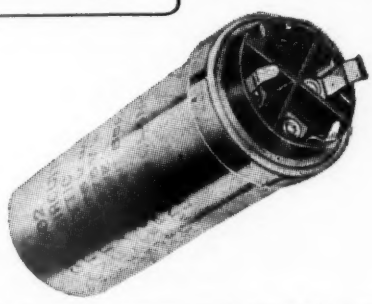



A special range of Plessey electrolytic capacitors is now available for vertical mounting in printed circuits. They plug directly into panels and the protruding tags do not require forming or bending but simply snap into the pierced holes and force the soldering surface into direct contact with the printed copper wiring. Due to the unique design of these capacitors, it is impossible to bridge the contacts during soldering operations. Mounting is foolproof and extremely simple because of the special tag arrangement. Soldering and removal of units is easily achieved without disturbing associated components or causing inadvertent damage. Produced for either manual or automatic insertion, printed circuit capacitors by Plessey are supplied in three different can dimensions : ¾", 1" and 1¼" diameters.

Those interested in the application of these outstanding components should request a copy of Plessey Publication No. 908.

SWINDON COMPONENTS DIVISION

THE PLESSEY COMPANY LIMITED • KEMBREY STREET • SWINDON • WILTS • Telephone 6211

Overseas Sales Organisation: Plessey International Limited • Ilford • Essex • Telephone Ilford 3040

SC5a

MUREX SINTERED PERMANENT MAGNETS are used in this new FATIGUE METER made by Mechanism Ltd.

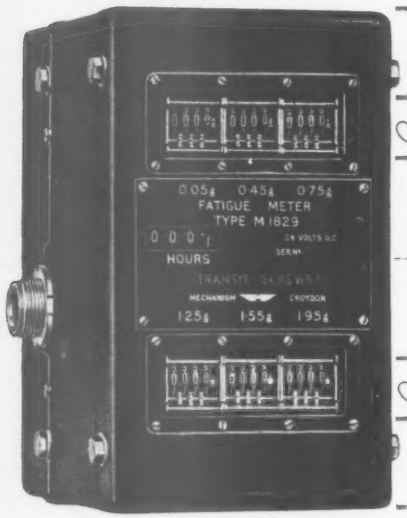

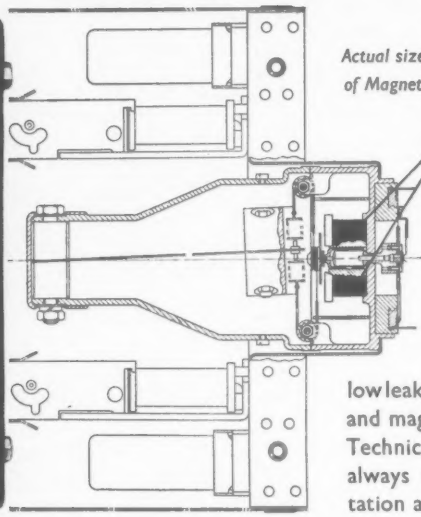

Actual size of Magnet



Murex 'Sincomax' magnets are used to meet the need for low leakage, high flux density, and magnetic stability. Technical representatives are always available for consultation and advice.

MUREX LIMITED *(Powder Metallurgy Division)* RAINHAM · ESSEX

Telephone : Rainham, Essex 3322. Telex 28632. Telegrams : Murex, Rainham-Dagenham Telex

LONDON SALES OFFICE: CENTRAL HOUSE, UPPER WOBURN PLACE, W.C.1. *Telephone: EUSton 8265*

A BRAND NEW TWELVE CHANGE-OVER RELAY

Latest of our enormous range of 3000 Type Relays.
Contacts: Up to 12 sets for Light-Duty (300 m/A or 1·0 Amp). Up to 8 sets for Heavy-Duty (2 Amp or 8 Amp).
Coils: Up to 100,000 Ω

KEYSWITCHES — 600 and HIGH-SPEED TYPE
Relays to specification.

PROMPT DELIVERY

THE KEYSWITCH CO.
120, KENSAL ROAD, LONDON, W.10
Telephone: LAD 0666, 4640 · Grams: "Tunequipt" London, W.10
Contractors to Home & Overseas Governments & H.M. Crown Agents

HI-FI EQUIPMENT
(CABINETS See page 52)

RADIO CHASSIS



Empress 9-valve de luxe AM/FM with two speakers 26 gns.
Empress 6-valve AM/FM with 10in. speaker ..... 22 gns.
Empress 6-valve de luxe AM/FM self-powered tuner 23 gns.
Empress FM Tuner £13/15/-
Empress 5-valve AM £14/5/-
Armstrong PB 409 9-valve AM/FM 6-watt push-pull ..... 28 gns.
AF 105 10-valve AM/FM 10-watt push-pull £37 0 0

DULCI

H.3 AM/FM 3 wavebands £20 17 0
H.4 AM/FM 4 wavebands £24 6 6
H.4.PP AM/FM push-pull 4 waveband £29 3 10
H.4.T2 AM/FM self-powered tuner £24 19 0
H.11 AM/FM tuner with pre-amplifier £29 3 10
FM self-powered tuner £17 10 3

AUTOCHANGERS

Garrard
RC 98/4 ..... £19 17 7
RC 88/4 ..... £17 18 8
RC 120/4 ..... £12 17 2
Collaro latest ... £9 19 6
B.S.R. Monarch ... £8 15 0

TRANSCRIPTORS

Garrard 301 ..... £26 8 3
Connoisseur £28 11 0
Goldring-Lenco 56 £23 7 10
Collaro 4T200 ..... £19 10 0
Collaro AC4/564... £9 7 0

FERROGRAPH TAPE RECORDER 3 A.N. ..... 79 gns.

Tape Decks with Pre-Amplifier, absolutely complete ready to connect to radio or amplifier:
Collaro/Magnafon Mk. IV ..... 40 gns.
Telefunken £47 5 0
Brenell Mk.5 Tape Deck ..... 28 gns.
Truvox Tape Deck 29 gns. ..... with type 'K' amplifier £50 8 0
Motek Tape Deck K.9 ..... 21 gns.
Wearite Tape Deck 3C £45 0 0

Send for Catalogue of complete range of Hi-Fi Equipment Cabinets, etc. All available on easy Hire Purchase.

LEWIS RADIO

120 (Dept. 658), Green Lanes Palmers Green, N.13
(Nr. Cock Tavern) Tel.: Bowes Park 1155/6

GECALLOY

screw cores

Gecalloy screw cores for Radio and Television application provide an inexpensive and simple method of inductance adjustment.

Moulding in three types of insulated powdered iron produces cores with the highest resistivity, ideal for H.F. and V.H.F. working.

Available in three grades: M.E. for frequencies from 100 Kc/s to 50 Mc/s
M.F. for frequencies from 5 Mc/s to 200 Mc/s
M.A. for frequencies from 50 Mc/s to 300 Mc/s

A comprehensive range of bobbins also available

Write for leaflets giving full technical details.

SALFORD ELECTRICAL INSTRUMENTS LIMITED
(COMPONENTS GROUP)
TIMES MILL · HEYWOOD · LANCASHIRE Tel: Heywood 6868
London Sales Office: Tel: Temple Bar 4669
A SUBSIDIARY OF THE GENERAL ELECTRIC CO. LTD. OF ENGLAND

CITY SALE & EXCHANGE LTD

The High Fidelity Specialists



AMPLIFIER

IF YOU WANT IMMEDIATE DELIVERY, BEST TERMS AND FIRST CLASS AFTER SALES SERVICE, BUY YOUR LEAK HI-FI EQUIPMENT FROM US



FM TUNER

PRICES ARE AS FOLLOWS

Leak T.L.12 plus main amplifier ..... 18 gns.
Leak Varislope III pre-amplifier ..... 15 gns.
Leak Point One plus pre-amplifier ..... 12 gns.
Leak Trough Line Tuner £35 10 0
Moving Coil Pick-up with diamond stylus ... £12 1 5
Matching Transformer £1 15 0

GRAMOPHONE PICK-UP

TO HOUSE THESE UNITS WE CAN OFFER THE FAMOUS SOUTHDOWN CABINET, IN WHICH THIS EQUIPMENT WAS DEMONSTRATED AT LAST YEAR'S AUDIO FAIR. THE PRICE OF THIS HANDSOME PIECE OF FURNITURE IS **£22 10s. 0d.**

We can also offer the best prices for your old Leak equipment in part exchange.

If you are in London, why not come along to our Fleet Street showrooms where this equipment is always on demonstration.

Write or telephone for further details.

93-94 FLEET STREET, LONDON, E.C.4 *Phone: FLEet St. 9391/2*

EXECUTIVES REQUIRE CRISP, CONCISE REPORTS—DICTATE THOSE DETAILS IN YOUR CAR! VALRADIO DC/AC CONVERTERS MAKE DICTATING MACHINES AND TAPE RECORDERS MOBILE

For use too with Record Changers, Radiograms, Electric Gramophones, Television Receivers, and T.V. from country house lighting plants. (Prices according to instrument.)

INPUTS . ENTREES . ENTRADAS
6, 12, 24, 32, 50 110 or 200/250 v.
OUTPUTS . SORTIES . SALIDAS
110 v. or 230 v. AC, 50 or 60 c/s, 30 to 300 w.

Prices DC/AC Converters:
From £3/18/—for Small Motors.
From £12/15/—for Radiograms (including 3-speed Types).

Units complete and ready for use. **VALRADIO.** ***Write for descriptive folder, WW/C. ACCEPTED AS THE STANDARD by*** **RADIO MANUFACTURERS, the Trade and the Aircraft industry.**

Les rapports destinés aux chefs de service doivent être rédigés d'une façon bien concise—dictez-les donc dans votre voiture!
Les convertisseurs C.C./C.A. "VALRADIO" consentent la mobilité aux machines à dicter et aux enregistreurs sur bandes.
Ils peuvent également être utilisés pour changeurs de disques, appareils combinés, électrophones, téléviseurs, etc., partant d'installations d'électricité, particuliéres.

Las relaciones destinadas a los jefes tienen que redactarse de modo muy conciso—dictenlas en el coche!
Los inversores C.C./C.A. "VALRADIO" les prestan movilidad a las máquinas de dictar y a los grabadores de cinta.
También pueden utilizarse para cambiadores de discos radio-combinados, gramófonos eléctricos aparatos de televisión, etc., aprovechando las instalaciones eléctricas privadas.

Specialist in converters since 1937. **VALRADIO LIMITED, BROWELLS LANE . FELTHAM . MIDDX. Phone: Feltham 4242/4837**
OVERSEAS ENQUIRIES TO:—DEMANDES D'OUTRE-MER A:— TODA INFORMACION DE EXPORTACION HA DE PELIRSE A:— E.M.I. SUPPLIES LTD. . HAYES . MIDDLESEX . ENGLAND

KEEP YOUR LP's LONGER PLAYING

Longer Record Life
G.B.C. RECORD SPRAY coating keeps dust off—gives record neutral surface that won't attract charged dust particles.

Truer Tone
G.B.C. RECORD SPRAY gives better tone—keeps grooves clean of microscopic bits of dirt—lets needle pick up true quality of record—fills up old scratches.

Keeps Your Records Clean
G.B.C. RECORD SPRAY lengthens record life—reduces scratching by eliminating grit—lubricates groove letting needle really float gently over the record.

16/6 inc. pur. tax.

Record Spray

FOR NEW AND OLD RECORDS

G.B.C. RECORD SPRAY, Dept. R/S, 119, Edgware Road, London, W.2.
Please send me free illustrated coloured leaflet.
Name .....
Address .....

G.B.C. RECORD SPRAY Dept. R/S, 119 EDGWARE ROAD, LONDON, W.2.

THE NEW Y3

ANTIFERENCE DIPLEXER/TRIPLEXER

FILTER UNIT FOR COMBINING OR DIVIDING BAND I, II & III AERIAL DOWNLEADS

Regd. Design No. 886499

RETAIL PRICE **13/6** COMPLETE WITH STANDARD COAXIAL PLUG

- ★ **HIGH "Q" CIRCUIT with all "OPEN" components.**
- ★ **FULLY INSULATED resilient snap-on cover.**
- ★ **MAXIMUM ATTENUATION of Unwanted bands.**
- ★ **MINIMUM INSERTION LOSS.**
- ★ **EASY TO CONNECT—standard coaxial socket and cord cable-grips.**
- ★ **ANY SIZE of DOWNLEAD—co-axial or twin feeder cable.**

Now supplied in this attractive

DISPLAY CARTON

containing 12 units

each individually boxed with co-axial plug, fixing screws and fitting instructions.

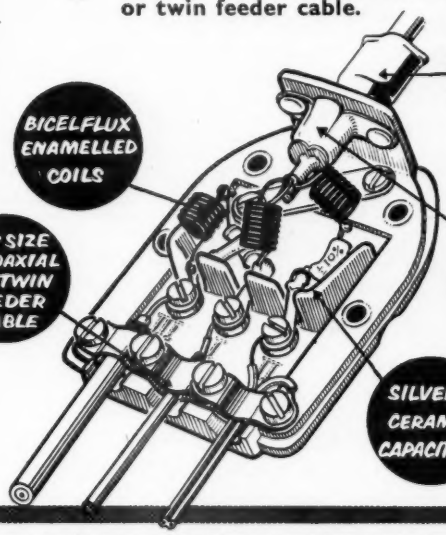
COMPLETE WITH STANDARD COAXIAL PLUG
BICELFLUX ENAMELLED COILS
ANY SIZE OF COAXIAL OR TWIN FEEDER CABLE
STANDARD COAXIAL SOCKET
SILVERED CERAMIC CAPACITORS

STANDARD Co-axial PLUGS & SOCKETS AS FITTED TO THE NEW Y3

CO-AXIAL PLUGS Cat. No. TVP/1
CO-AXIAL SOCKET Cat. No. TVS/1

To RECMF Specification

BOTH **8d** *each*

ANTIFERENCE LIMITED

DHB 6687

ANTIFERENCE LTD · BICESTER RD · AYLESBURY · BUCKS · Tel. Aylesbury 2511 (6 lines)

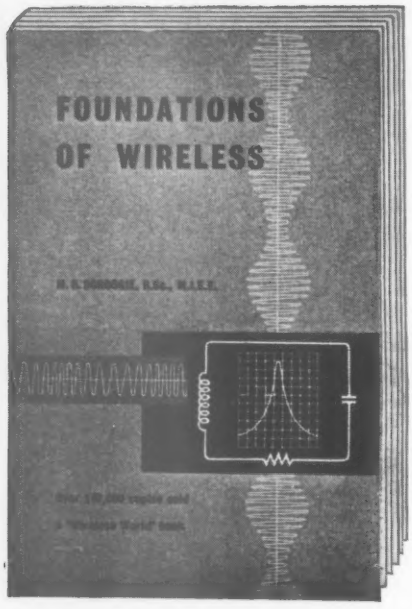

NEW enlarged edition of a book that has already sold over 170,000 copies

Foundations of Wireless

7th Edition *by M. G. Scroggie* **B.SC. M.I.E.E.**

Now virtually a new book, this 7th Edition has been almost entirely rewritten, and much material added to bring it completely up to date. In an easy style, it covers the whole basic theory, starting from the most elementary principles. It deals with receivers, transmitters, amplification, valves, transistors, aerials, power supplies, and other aspects of the subject. More emphasis is now made on f.m. and v.h.f., and cascade v.h.f. amplifiers, colour television, e.n.t. generators and transistor d.c. voltage raisers are included for the first time.

388pp 278 diagrams

15s net by post 16s 4d
from leading booksellers

Published for "Wireless World" by
ILIFFE & SONS LTD
DORSET HOUSE STAMFORD STREET LONDON S.E.1

RELAYS
TO SPECIFICATION

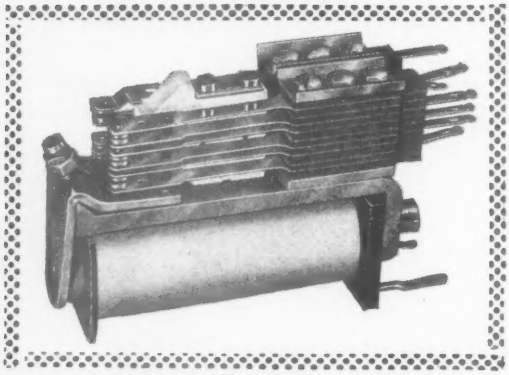

POST OFFICE TYPE
3,000 and 600 RELAYS

Specialists in tropical and Services jungle finish.
Guaranteed to full A.I.D. and I.E.M.E. standards.
Prompt Deliveries. Prototypes 7 to 10 days.
Post Office approved. All relays guaranteed made in our own works.
P.T.F.E. insulation now available

SIMMONDS

Manufacturers to H.M. Government Departments and leading Contractors
L. E. SIMMONDS LIMITED, 5 BYRON ROAD, HARROW, MIDDX.
TELEPHONE: HARROW 7797/9 TELEGRAMS: SIMRELAY HARROW

All famous makes of Tape Recorders including

the SOUND 777

can be seen and heard at

Incorporates the latest Collaro Mark IV Tape Transcriptor

also

GRUNDIG
TRUVOX
UHER
WYNDSOR
HARTING
G.B.C.
etc., etc.

Call in and see us or write for details of your requirements.

- *3 hours playing time*
- *3 watts output*
- *Numerical position indicator*
- *Completely automatic*

A 3 speed recorder giving up to 3 hours continuous playback with instantaneous track reversal. Supplied fitted in contemporary-styled suitcase with spool of tape. Microphone 55/- extra.

44 GNS.

The E. & G. Radio Centre Ltd.
High Fidelity and Tape Recording Specialists.

33, TOTTENHAM COURT ROAD, LONDON, W.1.
Telephone: MUSeum 6667.

Doing Pulsed or "Fast" Circuit Work?

Square Wave Generator

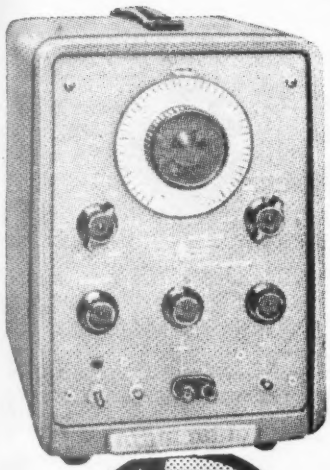

1 cps to 1 MC; 0.02 μsec rise time

-hp 211A Square Wave Generator. Versatile, wide range instrument for testing oscilloscopes, networks, video and audio amplifier performance, modulating signal generators, measuring time constants. Offers simple control of electronic switchers; is also convenient for indicating phase shift, frequency response and transient effects.

Special features include two separate outputs—a 7 volt, 75 ohm circuit for television work and a 55 volt, 600 ohm output for high level work. Both outputs offer full amplitude variation. May be operated free-running or externally synchronized with positive going pulse or sine wave signal of 3 volts minimum amplitude. Compact, weighs only 25 lb. Price £109.

Pulse Generator

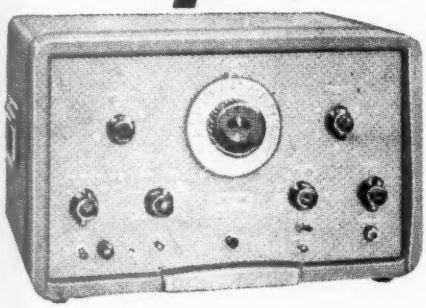

0.07 to 10 μsec pulses, 0.02 μsec rise time

-hp- 212A Pulse Generator. Time saving basic instrument for radar, television and other "fast" circuit work, including testing rf amplifiers, filters, band pass circuits; oscilloscopes and peak measuring equipment, pulse modulating uhf signal generators. Offers positive or negative pulses of 50 watts amplitude, delay and advance sync out circuits for synchronizing to other circuits, direct-reading pulse length control, high quality pulses with 0.02 rise and decay, flat top and minimum overshoot. Jitter less than 0.01 usec. Permits delivery of accurate pulses to end of long transmission lines; if line is correctly terminated, pulse shape is independent of line length, sync conditions, input voltage or output attenuator setting. Internal impedance 50 ohms or less, either polarity. Repetition rate, internal sync 50 to 5,000 pps, external sync 0 to 5,000 pps. Available for rack mount. Cabinet model £232.

Delivered in U.K. plus duty if applicable.
Data subject to change without notice.

HEWLETT-PACKARD COMPANY
Represented by
LIVINGSTON LABORATORIES LTD.
RETCAR STREET, LONDON, N.19, ENGLAND.
Tel.: Archway 6251

hp also offers new 120A Oscilloscope—dc to 200KC—£179

THE D·C·R 12·8

Although the combination of a 12in. and 8in. speaker in crossover is not so popular as it was some years ago, we not only continue to keep this design current but have actually revised it. There is still quite a large number of music lovers who have this combination, and one or two of these have already discovered with delight how much better their old friends sound in a housing which really does take care of their performance.

The main point of our revision was to make the anechoic chamber for the treble speaker large enough to take the 9¼in. Goodmans Axiom 80 speaker, and this well-known unit supported by a 12in. speaker for the bass makes a combination well up to the most exacting modern standards.

This is the first mention in our announcements of an anechoic chamber. The anechoic effect is achieved partly by appropriate shaping of the chamber and partly by the use of thick felt lagging boldly corrugated. The gain in sheer transparency, and distinctness of small sound effects, that is achieved when a treble speaker is mounted with this degree of purposeful care has to be heard to be believed; but no one who has carried out a direct comparison between a treble speaker so housed and one which has hard reflecting surfaces too near to the back of the cone is ever likely to forget the difference.

The upper chamber is also able to accommodate many of the smaller tweeters available today in addition to the 8in speaker so that the DCR 12.8 can figure on appropriate occasions as DCR 12.8.T.

1. D.C.R. 15.8.T. 4. D.C.R 12.8
2. D.C.R. 15.P.M.T. 5. D.C.R. 12.T.
3. D.C.R. 15.D. 6. D.C.R. 12.D
7. D.C.R. 12 Minor

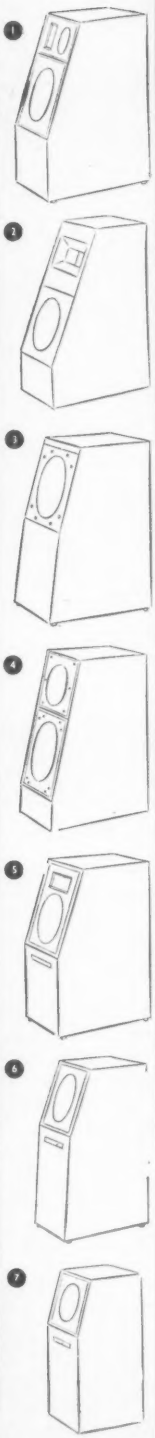

E·M·G

HANDMADE GRAMOPHONES LTD.
6 Newman Street W.1
MUSeum 9971

SURREY STEEL
COMPONENTS LTD

PRESSED METAL COMPONENTS FOR ELECTRONIC & RADIO INDUSTRIES

Chassis, Cases, Panels and associated fixing brackets tooled and manufactured to customer's specification. Components produced from steel, aluminium, brass, phosphor bronze or nickel silver. Components supplied self colour, plated and/or stove enamelled. Many standard tools are available in stock. Write, phone or call without obligation.

Why not let us solve YOUR problem now?

SURREY STEEL COMPONENTS LTD.
74-76 Church Street, Barnes, London, S.W.13
Phone: RIV 6673/4

FREQUENCY METERS

SIZES: 2½" to 8"
UP TO 5000 CYCLES
PROMPT DELIVERY

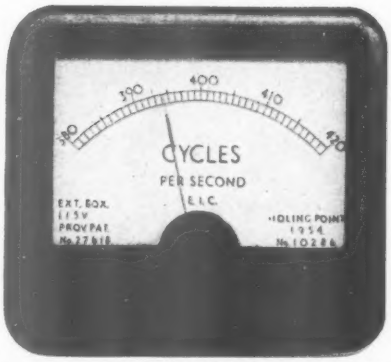

also the new SYNCHROSCOPE and Phase SEQUENCE METER both up to 5Kc.

and full range of Switchboard instruments
Ask for illustrated Catalogue

THE ELECTRICAL INSTRUMENT CO. (Hillington) LTD.
HILLINGTON GLASGOW

London stockists, H. A. Patterson & Ptnrs., Ltd.,
Oxford House, 23 West Wycombe Rd., High Wycombe.
Telephone: High Wycombe 2769

THE LONG PLAYING RECORD LIBRARY (Selective) CLASSICAL CATALOGUE & HANDBOOK FOR 1958

INCLUDING POSTAGE & PACKING **3/6** INCLUDING POSTAGE & PACKING

EASILY THE BEST VALUE IN THE GRAMOPHONE WORLD TODAY AND AN ESSENTIAL PURCHASE FOR THE RECORD COLLECTOR AND AUDIO ENTHUSIAST

CONTENTS

- A selective list for *all* the L/Ps of good music well reviewed by the critics—over 4,000 recordings listed.
- A basis for a 1958 record collection—100 recommended L/Ps.
- 50 L/Ps specially suitable for demonstrating high fidelity equipment.
- The care and reproduction of L/Ps.
- Groove jumping and groove repeating.
- The use of amplifier controls.
- Full details of Library membership (at approx. 1/- per week each L/P borrowed).

SEND 3/6 FOR YOUR COPY NOW

THE L/P RECORD LIBRARY
SQUIRES GATE, STATION APPROACH
BLACKPOOL, LANCS.

FACTORY FRESH SALES SERVICE

FACTORY FRESH — THE LONG PLAYING — FFSS — RECORD LIBRARY — SALES SERVICE

ALL NEW L/Ps SUPPLIED TO ORDER BY THE LONG PLAYING RECORD LIBRARY ARE NOW TREATED BY THE "PARASTAT" PROCESS AND THUS BECOME PERMANENTLY ANTI-STATIC AND RESISTANT TO DUST.

OTHER FEATURES OF THIS UNIQUE SERVICE ARE: Any record purchased is not only a brand new, guaranteed unplayed factory copy but it has been obtained from the manufacturers by special order for the purchaser. Besides being unblemished the disc is also *as up-to-date a pressing as currently available in this country*. This is tremendously important when it is realised that many of the older L/Ps (especially Decca) are currently being recut from the master tapes by the manufacturer *with marked improvement in reproduction.*

ANNOUNCING

THE MACKIE PARALLEL TRACKING ARM

Offering at last to the audio-connoisseur, perfect radial and tangential tracking.

- The arm is carried on two steel balls only, thus reducing bearings friction to an absolute minimum.
- Side pressure on stylus—virtually nill.
- Stylus and record wear reduced almost to a point of non-existence.
- Armlength of 2" eliminates inertia.
- Usable with any cartridge.

(Send s.a.e. 2½ for introductory leaflet)

MODERN ELECTRICS LTD

164 CHARING CROSS ROAD, LONDON, W.C.2

TELEPHONES: TEM 7587 & COV 1703 CABLES: MODCHAREX, LONDON

LONDON'S LEADING TAPE RECORDING SPECIALISTS

Appointed Agents for

FERROGRAPH **TRUVOX**
GRUNDIG **ELIZABETHAN**
VORTEXION **BRENELL**
PHILIPS **ETC.**

18 *various types of* **RUN-IN TAPES** *(coloured)*

SPLICERS
JOINTING-COMPOUNDS

72 *various types of* **RECORDING TAPE** *(L.P. and Standard)*

HI-FI DEMONSTRATIONS AT ALL TIMES

GRAM UNITS
LENCO
COLLARO
GARRARD
CONNOISSEUR

50 *various types of* **PICK-UPS & HEADS**

50 *various types of* **STYLI** *(Diamond & Sapphire)*

AMPLIFIERS
QUAD **LEAK** **PILOT**
PAMPHONIC **ROGERS**
BEAM-ECHO **MULLARD**
TRUVOX **RCA.** **ETC.**

50 *various types of* **LOUDSPEAKERS**

Send stamped, addressed envelope for our complete list of Tapes, Accessories and prices.

★ *Prompt attention to post orders*
★ *Overseas visitors welcomed*

4 girls now do work of 5

New techniques demand new tools. Transistors, printed circuits, sub-miniature components can now be soldered more accurately, with much less effort, without risk of damage to adjacent components with the feather-weight pencil-thin Oryx. Available in seven models for continuous working up to 470°C. Widely used by instrument makers, electronic equipment makers throughout the world. It will pay you to give the Oryx an extended trial on your own production lines.

from **25/-** subject

For QUICKER.. BETTER Joints at less cost!

EXCLUSIVE ORYX FEATURES

★ Low voltage (6-24 v.), absolutely safe, therefore ideal for female operatives.
★ Heats up in 35 seconds—cannot overheat during extended use
★ Uses renewable, interchangeable, corrosion-resistant bits
★ Patented heating element has no ceramic spacers or mica insulators
★ Ideal for battery-operated mobile service on cars, trucks, aircraft
★ Efficiency equal to mains-operated 80-watt iron at fraction of weight and size
★ Fully guaranteed against breakdown for twelve months

Write now for illustrated Folder and Price List.

ORYX

ORYX ELECTRICAL LABORATORIES LTD.,
DOMINION ROAD, WORTHING, SUSSEX *Tel:* WORTHING 9895

BROOKES *Crystals*

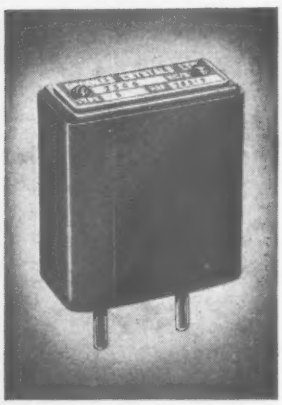

mean **DEPENDABLE** frequency control

Illustrated left is a Type S Crystal unit from a range covering 100 Kc/s to 15 Mc/s

- *Black Bakelite case.*
- *1⅛" high × 1 7/16" wide × ¾" thick.*
- *Two ⅛" dia. pins spaced ½" centres.*

All Brookes Crystals are made to exacting standards and close tolerances. They are available with a variety of bases and in a wide range of frequencies. There is a Brookes Crystal to suit your purpose—let us have your enquiry now.

BROOKES

Brookes Crystals Ltd.

Suppliers to Ministry of Supply, Home Office, B.B.C., etc.
181/3 TRAFALGAR ROAD, LONDON, S.E.10
Phone: GREenwich 1828 *Grams:* Xtals, Green, London

MARINE AERIALS LTD.

Proudly announce the latest in TV aerial design

The "Marinette" Multi-channel Indoor aerial with "built-in" Band I aerial and Automatic Electronic Switching. (Pats. Pending) **23/6** Retail

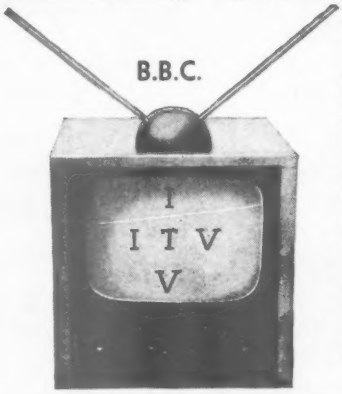

EXCLUSIVE FEATURES

A new concept in Combined aerial design.
Band I aerial and Electronic switching assembly inside dome base automatically switches in desired band.
Band III elements only visible.
Each aerial entirely separate, and designed to perform at its respective maximum efficiency.
Now you can effectively lower your installation costs.

This is NOT a compromise Aerial!

Available in Black, Red, Primrose and Blue, with anodised "gold-tinted" elements. These are adjustable 90-180°. Key-hole cut-outs in base, for easy wall-fixing. Polythene dome base protects polished surfaces. Identical in appearance to our Band III at 16/6 retail. Complete with 9 foot cable.

Export & Trade enquiries to:

MARINE AERIALS LTD.
17a CLIFTON RISE, LONDON, S.E.14, ENGLAND
TIDeway 3066

AEI for MEASURING INSTRUMENTS

MOVING COIL • MOVING IRON • THERMO COUPLE • ELECTROSTATIC

IMMEDIATE DELIVERY

Most Basic Rsnges available **ex-stock** for immediate despatch. Special ranges—delivery 7/14 days.

Round, Square or Rectangular patterns available, also full range of Industrial Switchboard Instruments. Portable and Laboratory Instruments.

We can supply Meters with Non-Standard Ranges in Current, Volts or Ohms. To B.S. 89. Industrial or Precision Grade accuracy.

We are the largest stockists of Electrical Measuring Instruments in the Country.

Clients are invited to inspect the display of instruments at our New Offices and Showrooms.

May we quote for your requirements?

NEW MINIATURISED MODEL



Turner Model 703
Rectangular Flush 4" × 3", body diameter 2½", scale length 3¼" nominal

Stockists of Meters by Turner, Weston, Baldwin, E.A.C., Weir and other leading manufacturers.

Electronic Equipment and Test Apparatus manufactured to customers design or specification

Contractors to G.P.O. and other Govt. Depts.

Anders Electronics LTD.

103, HAMPSTEAD RD., EUSTON, N.W.1. Tel. EUSton 1639

DEPENDABLE RELAY CO. LTD.

8A AINGER RD., CAMDEN TOWN, LONDON, N.W.3. PRImrose 8161

Head office, 12a Tottenham Street, W.1

P. O. TYPE 3,000 & 600 RELAYS

Typical 3,000 TYPE RELAY

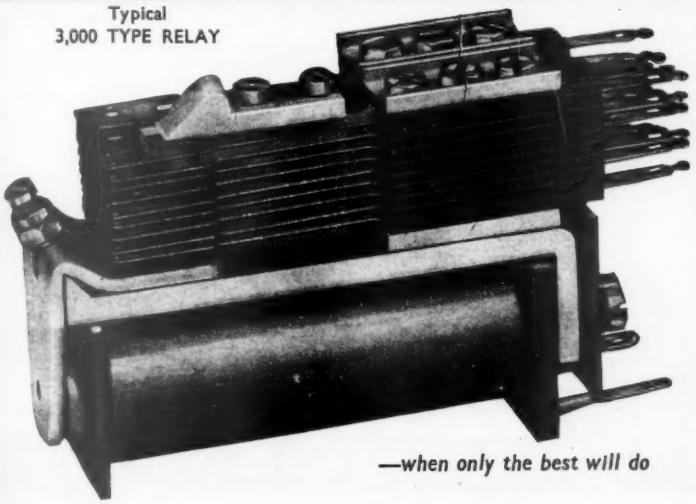

—when only the best will do

Have you a Relay Problem?

The answer is at your elbow!

Just pick up your telephone and our long experience is at your service. —delivery—applications etc., etc. —; we can help you in all of these

Service is our byword

Relays manufactured to your specification to A.I.D. & I.E.M.E. Standards

★ **COILS** up to 80,000Ω
★ **CONTACTS** up to 8 amp.
★ **INSULATION** up to 5kv.
★ **PROTOTYPES 7 DAYS.**
★ **SPECIALISTS in TROPICALISATION**
★ **TRANSISTORISED RELAYS**

Technical data leaflet on request.

Redifon — THE WORLD'S LEADING

introduce the GR.400

for R/T or CW operation

MANUFACTURERS OF RADIOTELEPHONES

TRANSISTORISED SSB Radiotelephone

TRANSISTORISED — for reliability, compactness, minimum weight and power consumption.

THIRD METHOD — of SSB eliminates the need for expensive filters and critical adjustment.

SIMPLEX or DUPLEX — the standard model is for Simplex — an additional receiver is supplied for Duplex operation.

COMPATIBLE — for use on single sideband or in conventional double sideband networks.

COMPACT — only 14 ins. deep, for conveniently mounting on desk or table top.

FULL TROPICAL SPECIFICATION

Power output : 60 watts P.E.P.
Frequency range : 2–10 Mc/s.
Channels : 4 crystal controlled spots **in any part of the range.**
Dimensions : 25" x 21½" x 14" deep.
Power supplies : 100–125v or 200–250v AC or 12 or 24v DC.
Power consumption : 280 VA for 60 watt output.

With all the advantages of single sideband, the GR.400 is still as simple to operate as an ordinary telephone. The first transistorised radiotelephone, this new model further enhances the wide range of Redifon radiotelephones — many thousands of which are in use all over the world.

REDIFON LIMITED Radio Communications Division, Broomhill Road, London, S.W.18

Telephone: Vandyke 7281

A Manufacturing Company in the Rediffusion Group

68R.

PREMIER



207, EDGWARE ROAD, LONDON, W.2. Tel: AMB 4033 & PAD 3271 YOUR LEADING DO-IT-

THE "Petite" PORTABLE

MAY BE BUILT FOR **£7-7-0** plus 3/- post & packing.

Batteries extra.
HT 10/- (Type B126) or equivalent.
LT 1/6 (Type AD 35) or equivalent.

- ★ Size only 8in. x 8in. x 4½in.
- ★ Weight including batteries, 5½lb.
- ★ 4 valves of the economy type.
- ★ Medium and long wave superhet circuit.
- ★ High Q frame aerials.
- ★ High sensitivity on both wavebands.
- ★ Prealigned IF transformers.
- ★ 5in. speaker of the latest type.
- ★ Automatic on/off switch operated by lid.
- ★ Designed in our own laboratory.
- ★ Backed by an up-to-date Technical Information Dept.
- ★ Components available separately if desired.
- ★ Simple to construct, using normal soldering methods.
- ★ Instruction book 1/6.

SAVE POUNDS AND PUT IT TOGETHER YOURSELF!

TOTAL COST ONLY **£9-19-6** plus 5/- packing & postage.

Each Unit may be purchased separately as follows:—

Amplifier Cabinet in maroon and fawn (size 13½ × 11 × 6½in.)	£2/10/-
1 Valve Amplifier	£2/19/6
7×4in. Elliptical Speaker	£1/1/6
B.S.R. TU8 Turntable and Pickup	£3/19/6

This can also be supplied complete with the **Latest Collaro 4-speed Junior Turntable and Pick-up** for only £10/12/6 plus 5/- packing and postage.

If any of the individual items are purchased kindly add the postage as follows: Cabinet 3/-, Amplifier and Speaker 3/-, Turntable 2/6.

DRAMATIC PRICE REDUCTIONS

SUPERHET may be built for **£7.7.0** plus 3/- p.p.

T.R.F. may be built for **£5.10.0** plus 3/- p.p.

These two receivers use the latest type circuitry and are fitted into attractive cabinets 12in. × 6½in. × 5½in. in either walnut or ivory bakelite or wood. Individual instruction books 1/- each, post free.

PREMIER BATTERY ELIMINATOR

Housed in two containers which are exactly the same size as AD 35 and B126 Batteries.

KIT **37/6**

Plus 2/- post and packing.



Build the NEW "MAYFAIR" TELEVISOR

which gives complete SAFETY to the constructor!

These Televisors use a double wound mains transformer which gives you complete safety from contact with the mains supply when handling the chassis or controls.

★ B.B.C. & I.T.A. DESIGN

WITH NEW TURRET TUNER MAY BE BUILT FOR **£33-7-11**

PLUS COST OF C.R.T.

Build in 5 Easy Stages. Full Construction details available. Instruction Book 3/6 Post Free.

CONSOLE CABINETS with full length doors for 14in., 16in., and 17in. tubes. PRICE £14/14/-. H.P. Terms: Deposit £7/7/6 and 9 monthly payments of 18/6.
CONSOLE CABINETS. Half-door £12/12/-. H.P. Terms: Deposit £6/6/- and 8 monthly payments of 18/3. On above cabinets and 21/- for pkg. and carr.

PLEASE ADDRESS ALL MAIL ORDER ENQUIRIES TO

RADIO CO

YOURSELF SPECIALISTS 23 TOTTENHAM COURT RD., LONDON, W.1. Tel: MUSeum 3451

Build this New

TAPE RECORDER KIT

for only

£38.15.0

This Kit comprises:

2-speed Lane Mk. VI Deck	£18/10/-
Premier Tape Amplifier complete with separate plug-in-type power pack	£14/-/-
7×4 Elliptical Speaker	£1/1/6
De-luxe Cabinet with gilt fittings and detachable lid	£4/19/6
Reel of Scotch Boy 1,200ft. Tape and empty Spool	£1/11/6
Latest Type ACOS microphone....	£2/15/-

All the above sections can be purchased separately.

The New De-Luxe

TAPE RECORDER TR3

for £6/5/- DEPOSIT AND 8 MONTHLY PAYMENTS of £5/17/11 OR CASH 45 gns. plus 21/- post and pkg.

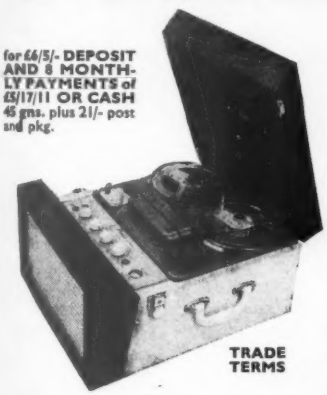

TRADE TERMS

Case finished in Red and Cream with Gilt styling and fittings. Size 18½ × 15 × 9in. For A.C. mains 200/250 v. 50 cycles. Complete with tape and latest Acos microphone. 2-speed twin track giving 1 or 2 hours recording respectively, incorporating a 10×6in. high flux loudspeaker.

SPECIAL ANNOUNCEMENT

WEARITE 3A Decks	£35/0/0
3B Decks.....	£40/0/0
COLLARO Decks	£25/0/0

Packing and Carr. 10/- extra on all three items.



Why not make the best!

MULLARD AMPLIFIER KIT

NOW SUPPLIED WITH ULTRALINEAR OUTPUT TRANSFORMER.

All the components for model 510, PLUS pre-amplifier on one chassis (total six valves), chassis gold hammer finished. May be purchased for £12/12/- plus pkg. and post 7/6. This version complete and tested £15/15/-. Or pre-amplifier and tone control in a separate unit £14/14/- plus pkg. and post 7/6.

Introducing the

PHONOTRIX

BATTERY TRANSISTOR MINIATURE

TAPE RECORDER

Supplied complete with Microphone and small Loudspeaker, operates on 4 U2 Torch batteries, weighs only 4 lb. and plays for 30 minutes. Size 6½ × 4½ × 3½in. complete plus 5/- pkg. and post. Retail Price **26 gns.**

OR on Credit Terms: Deposit £3/8/- and 8 monthly repayments of £3/10/-.

THE JASON "ARGONAUT"

MW/FM DESIGN

★ **All Premier components are designer approved ALL components to build the complete Receiver, including output stage, may be purchased for £15/5/-, or all components less output stage but including Power Supply, for £13/19/6, plus packing and postage 3/6 on each.**



1 valve. Overall size 5in. long × 2¼in. wide × 3¼in. high. Suitable speaker for above 7in. × 4in. elliptical **21/10.**

COMPACT GRAM AMPLIFIER

Complete ready to connect to any type of Pick-up and Speaker (3 ohms) A.C. Mains 200/250 v. Volume and tone control on 9in. extended leads,

Price £2.19.6

Plus pkg. & post 2/6.

CABINETS — PORTABLE

MODEL PC/S

Grey Lizard Rexine covered 45/-

Overall dimensions 15in. × 13½in. × 6½in. Clearance under lid when closed 3in.

MODEL PC/2 DE LUXE

Two colours, wine and grey, with cut-out for speaker and amplifier 55/6

Dimensions 15in. × 14in. × 7½in.

MODEL PC/3

Grey Lizard Rexine covered 69/6

Overall dimensions 16½in. × 14½in. × 11in. Clearance under lid when closed 3½in.

MODEL PC/3 DE LUXE

As above but with cutouts for Speaker and Amplifier 79/6

Dimensions as above.

THE ABOVE CABINETS ARE COMPLETE WITH CARRYING HANDLE FASTENERS AND PANEL.

Packing and Postage 3/- each.

Junction Transistors 10/- each

LORENZ MODEL PL 562

4-speed gram. motor.

Price **£3 . 13 . 6**

PUT IT TOGETHER YOURSELF

and save pounds!

Cabinet £2/19/6, *plus* 5/- *pkg. and post.*

Premier 1 valve Gram. Amplifier £2/19/6, *plus* 2/6 *pkg. and post.*

Premier 2 Valve Printed Circuit Amplifier £3/5/6, *plus* 2/6 *pkg. and post.*

8in. × 5in. Speaker 27/6, *plus* 1/6 *pkg. and post.*

Collaro 4-Speed Changer £8/19/6, *plus* 5/- *pkg. and post.*

BSR 4-Speed Changer £8/15/-, *plus* 5/- *pkg. and post.*

If a set of parts is purchased together pkg. and post will be 10/-.

SEND 3d. STAMP FOR OUR LATEST CATALOGUE

We carry a comprehensive stock of components by all leading manufacturers.

(Dept. WW) 207 EDGWARE ROAD · LONDON W.2.

YOU'LL DO BETTER WITH PREMIER

AM/FM RADIOGRAM CHASSIS
OF THE LATEST TYPE



Cash £22/10/-, or Credit Terms £3/10/- Deposit and 8 monthly payments of £2/14/8. H.P. Terms £11/5/- Deposit and 12 monthly payments of £1/0/11. Packing and carr. 7/6. This chassis has 8 valves and covers short, medium and long FM and Gram. Printed circuit on FM ensures a high degree of stability. Overall size 14in. long, 6⅝in. high, 9in. deep. Dial size 12 × 5⅛in.

MERCURY SWITCHED FM TUNER *by* JASON

5 valves Foster-Seeley Discriminator
Complete set of parts can be purchased for £9.19.6 plus2/6 p.p.
All the components can be purchased separately. The main components are as follows:—

Chassis	6/6
2 side panels, pair	3/-
Prefabricated front-end completely wired and tested with IEF80 and IECF80 (incl. P.T.)	£6/5/-
Discriminator	11/6
2 I.F. Transformers at 5/9 each	11/6
Complete instruction book	2/-

JASON FM TUNER

Jason dial, chassis and Tuning condenser completely assembled £2/6/3. Set of coils, complete with cans and silver mica condensers £1/6/-. Complete tuner can be built for £6/15/-, plus 5/6 post and packing. Write for Instruction book 2/-.

PREMIER BUREAU DE LUXE



A superb cabinet in finely figured walnut veneer. Interior light sycamore with rexine matching lining. Overall dimensions: 33in. high, 34in. long, 17½in. deep. Uncut control panel on right-hand side approximately 16in. × 10½in., uncut baseboard on left-hand side 15½in. long, 13½in. deep. Two full size felt-lined storage cupboards in the lower part of the cabinet.
Cash price ..... 16½ gns.
Credit Terms: Deposit £2/6/6 and 8 monthly payments of £2/3/2. Packing and carriage 25/- extra.

The Latest COLLARO 4-speed single player £4/12/6
Plus 2/6 packing and carriage.

Latest B.S.R. MONARCH 4-speed Autochanger £8/15/-
Plus 5/- packing and postage.

Build the
ONE VALVE BATTERY RECEIVER
AS SHOWN ON B.B.C. T.V.
This Receiver contains a DAF96 valve and a pair of 4,000 ohm headphones and is powered by a combined 67½ and 1½ volt battery.
Price complete with headphones and including battery **45/-**
Send for free diagram.

TERMS OF BUSINESS
Cash with order or C.O.D over £1 *Please add 1/- for Post*
Orders under 10/-. 1/6 under 40/- *Unless otherwise stated.*

8 WATT AMPLIFIER



This design includes 5 miniature valves of th latest types, an Ultralinear Output Transformer suitable for Speakers of 3 and 15 ohms, and a very attractive Perspex front panel with gold lettering, complete set of parts £8/8/-. Postage and packing 5/- extra. Or £10/19/6 built and tested.

4 WATT AMPLIFIER



MAY BE BUILT FOR **£4.10.0** plus 2/6 P.P. Instruction Book 1/- post free.

A steel case is now available, complete with engraved panel, for 15/6 extra. The amplifier may be supplied complete for £5/5/- plus pkg. and post 3/6, or fitted in case at £6 plus pkg. and post 3/6. Engraved panel 3/6. Post free.

WHY BUY SURPLUS OR RE-CONDITIONED TUBES WHEN THESE FULLY GUARANTEED WIDE ANGLE TUBES ARE AVAILABLE? THE LATEST TYPE 17in. RECTANGULAR TUBE AT £17 (INCL. TAX), POST AND PACKING 21/- EXTRA.

B.S.R. TU8 3-speed Record Player with Pick-up £3/19/6

PREMIER RADIO CO. (Dept. W.W.) 207 EDGWARE RD., LONDON, W.2. Tel: AMBassador 4033

A Great Trio

Every lover of music and perfect record reproduction will want to possess these informative and entertaining books by G. A. Briggs.

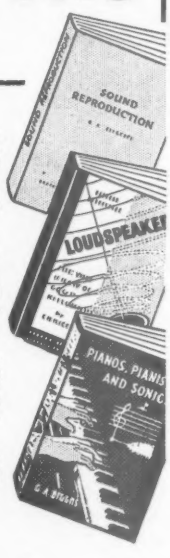

SOUND REPRODUCTION
Third edition, third impression, 368 pages, 315 illustrations. Chapters on Resonances, Cabinets, Room acoustics, Response curves with Oscillograms. Crossover networks, Recording Systems, Records, Pick-ups, etc. Total sales exceed 35,000. 17/6 (18/6 post free).

LOUDSPEAKERS
4th edition. 92 pages, 45 illustrations. Standard reference work on loudspeakers. Detailed information, diagrams, description of Electrostatic speaker, and concert hall demonstrations. Total sales 45,000. 7/6 (8/- post free).

PIANOS, PIANISTS AND SONICS
A book for sound enthusiasts and music lovers written in G. A. Briggs' entertaining style. Chapters on piano history and construction. Harmonic analysis. Touch, Tone Tuning, etc. 192 pages, 102 illustrations. 10/6 (11/6 post free).

It is regretted that the book "High Fidelity" is now out of print and will not be re-issued.

Sold by radio dealers and bookshops.
Published by Wharfedale Wireless Works, Ltd.

Wharfedale

WIRELESS WORKS LTD., IDLE, BRADFORD, YORKS



Chapman S5E/FM

This high quality De Luxe AM/FM Tuner is specially recommended to the discriminating listener. Combining superb FM quality with extreme AM sensitivity, good World Wide coverage is assured.

S5E/FM. Medium and 3 Short wavebands plus FM, with an RF stage on all AM bands and variable selectivity. Cathode Ray tuning indicator.
32½ gns. or 36½ gns. self-powered, including P.T.

S5/FM. As above, but Long, Medium and Short wavebands plus FM.

Full specifications available from

Your Hi-Fi Dealer or

C. T. CHAPMAN (Reproducers) LTD.
CHAPEL LANE, HIGH WYCOMBE, BUCKS.
Telephone : High Wycombe 2474

TELENG

Experience proudly presents

MEASURING INSTRUMENTS



H.F. INDICATOR METER Type 2

Range 20 mV to 2.5 V in three ranges

A valve voltmeter for accurate H.F. voltage measurement and indication in test or alignment of Repeaters, Amplifiers, etc.



Special features include :

★ **Stabilized valve bridge circuit.**

★ **Very small insulated Xstal diode probe.**

★ **Shunt C at H.F. only 1.5pf.**

SIGNAL LEVEL METER Type SL3/B

A battery operated valve voltmeter for measurement of Television, Television Sound and F/M signals as would appear at the down lead end of Aerial Installation or on Cabling of Wired Television or Communal Aerial Systems.



Special features include :

★ **Turret channel selection.**

★ **Audible signal recognition.**

★ **Free from interference injection via input.**

★ **Probe unit for cable measurements with minimum mis-match.**

RANGE: 25 μV to 25 mV in three (attenuator) ranges, or with probe—250 μV to 250 mV. Frequency coverage 40-220 mc/s (Bands 1, 2 & 3).

Write for fully descriptive illustrated lists to —

TELEFUSION ENGINEERING LTD.

ONE OF THE TELEFUSION GROUP OF COMPANIES

TELENG WORKS, CHURCH ROAD, HAROLD WOOD, ROMFORD, ESSEX Tel.: Ingrebourne 2901

McMURDO

Potted Pakonectors

18 WAY

★ No cover and cable clamp worries. We connect your cable to plug or socket and pot the assembly in polythene. ★ 18 connections in less than 1 inch diameter. ★ Standard B9A valveholder mounting. ★ Nylon loaded P.F. mouldings. ★ Cadmium plated or gold plated pins and contacts.

Send for full details to:—

THE McMURDO INSTRUMENT CO. LTD., ASHTEAD, SURREY. Tel: ASHTEAD 3401

MPCI9

world-wide approval

Pye Telecommunications Limited are now marketing the widest and most modern range of V.H.F. fixed and mobile radio-telephone equipment available in the world. This range of equipment has been designed to expand the application of Pye Radio-Telephones already in constant use all over the world.

Pye Ranger V.H.F. equipment has now received approval from the British G.P.O. for Land and Marine applications employing A.M. or F.M. systems, type approval from the Canadian D.O.T. and type acceptance of the F.C.C. of the United States of America.

Pye V.H.F. equipment is designed to meet the approval of authorities throughout the world. No other Company holds so many approvals for this range of equipment, which now covers every conceivable requirement.

We can offer

FREQUENCY RANGE
All frequencies from 25 to 174 Mc/s.

POWER RANGE
All powers up to 1 Kilowatt.

CHANNEL SPACING
All channel spacings including 20 and 25 kc/s in full production.

MODULATION
A.M. or F.M.

No matter what your V.H.F. requirements are, Pye Telecommunications Ltd., can fulfil them. Your enquiries are invited.

PYE

Leading the world in V.H.F. RADIO-COMMUNICATIONS

PYE TELECOMMUNICATIONS

distributors in 91 countries ensure trouble free service

PYE TELECOMMUNICATIONS LTD NEWMARKET RD CAMBRIDGE ENGLAND

Phone: Teversham 3131 Cables: Pyetelecom Cambridge

Wireless World

ELECTRONICS, RADIO, TELEVISION

Managing Editor: HUGH S. POCOCK, M.I.E.E.
Editor: F. L. DEVEREUX, B.Sc.

JUNE 1958

In This Issue

253 Editorial Comment
254 Standing Waves in Listening Rooms — *By J. Moir*
259 Standards for Stereo Disc Records
262 Variable-output Mains Transformer — *By H. E. Styles*
264 World of Wireless
266 Personalities
267 News from the Industry
269 Components Exhibition
276 Transistor Miniature Tape Recorder
277 Letters to the Editor
279 Electrons and Heat — *By "Cathode Ray"*
283 U.K. Tropospheric Scatter Systems
284 Instruments, Electronics and Automation Exhibition
291 London Audio Fair
294 Measuring TV Aerial Performance—3 — *By F. R. W. Strafford*
298 Short-Wave Conditions
299 Manufacturers' Products
300 Random Radiations — *By "Diallist"*
302 Unbiased — *By "Free Grid"*

VOLUME 64 No. 6

PRICE: TWO SHILLINGS

FORTY-EIGHTH YEAR OF PUBLICATION

◆ ◆ ◆ ◆ ◆ ◆

Offices: Dorset House, Stamford Street, London, S.E.1

Please address to Editor, Advertisement Manager or Publisher, as appropriate.

Telephone: WATerloo 3333 (60 lines)

Telegraphic Address: "Ethaworld, Sedist, London."

PUBLISHED MONTHLY (4th Tuesday of preceding month) by ILIFFE & SONS LTD., Dorset House, Stamford Street, London, S.E.1. *Telephone:* Waterloo 3333 (60 lines). *Telegrams:* "Iliffepres, Sedist, London." *Annual Subscriptions: Home and Overseas,* £1 15s. 0d. *Canada and U.S.A.,* $5.00. Second-class mail privileges authorised at New York, N.Y. BRANCH OFFICES: *BIRMINGHAM:* King Edward House, New Street, 2. *Telephone:* Midland 7191. *COVENTRY:* 8-10, Corporation Street. *Telephone:* Coventry 5210. *GLASGOW:* 26B, Renfield Street, C.2. *Telephone:* Central 1265. *MANCHESTER:* 260, Deansgate, 3. *Telephone:* Blackfriars 4412. NEW YORK OFFICE: *U.S.A.:* 111, Broadway, 6. *Telephone:* Digby 9-1197.

Transistor D.C. Stabilised Power Supply

This mains-operated d.c. stabilised transistor power supply is very suitable for general laboratory use. Stabilised voltage output ranges of 0 to 15V and 15 to 30V are included, as well as constant current output ranges of 0 to 10mA and 0 to 100mA. The design incorporates one of the recently developed Mullard OAZ203 zener reference diodes (D9).

Using a maximum current of 100mA, if the maximum voltage is 32V, the maximum dissipation of the series transistor (OC16) is 3·2W; this dissipation can be ignored in the design.

The simplest form of voltage stabiliser, using transistors, is the emitter follower with the base connected to a reference battery. The emitter follower may be a single or compound type. The emitter follower, in this design, consists of a Mullard OC16 and an OC73 transistor in cascade. The value of V_{be} is less than 0·5V, and, because of the high collector resistance, the variation of V_{be} with collector voltage is negligible. But even at a fixed current, V_{be} can vary with temperature (2·5mV/°C). This effect is increased proportionally with the number of transistors used. The relatively high output resistance leads to a consideration of d.c. feedback as a means of reduction.

The d.c. feedback is applied from the base of the emitter follower to the collector of the phase-reversing amplifier. The output resistance of the emitter follower is reduced by a factor (1+A) where A is the gain of the feedback amplifier. The effect on the output of variation in the unstabilised supply can be eliminated almost completely, by supplying the feedback amplifier from a stabilised line.

The effect of applying feedback to a single transistor amplifier and a compound emitter follower of two transistors, is to reduce the output resistance by a factor of several hundred. The output voltage is dependent on V_{be} where this voltage applies to the right hand OC73 of the long-tailed pair shown in the circuit. This voltage, in turn, depends on the temperature variation of V_{be} for the first OC73. Using feedback, this variation is negligible compared with its own temperature variation (again 2·5mV/°C). The variation of output voltage can be minimised using a long-tailed pair as the amplifier. The temperature variations of the two Mullard OC73 transistors are equal and so balance out. The output voltage varies only slightly with V_{be}, as shown above. The d.c. output resistance is greatly reduced by the feedback, the long-tailed pair itself reducing it only slightly, by making it less dependent on the internal resistance of the reference source.

Separate terminals are provided for current and voltage outputs. The constant current output is obtained by putting fixed resistors in series with the output, and comparing the voltage across them with that of the reference source. The required output current is set up on the meter, with the switch in the 'Off' position (connecting a 100Ω load across the output), then it is switched into the load in the 'On' position.

Two voltage ranges are necessary to prevent excessive dissipation of the series transistor, there is a minimum overlap of the ranges of 1V. For a 10% change of mains input, the output variation is less than 1%. The output ripple is less than 1mVr.m.s., which is negligible compared with most output voltages required.

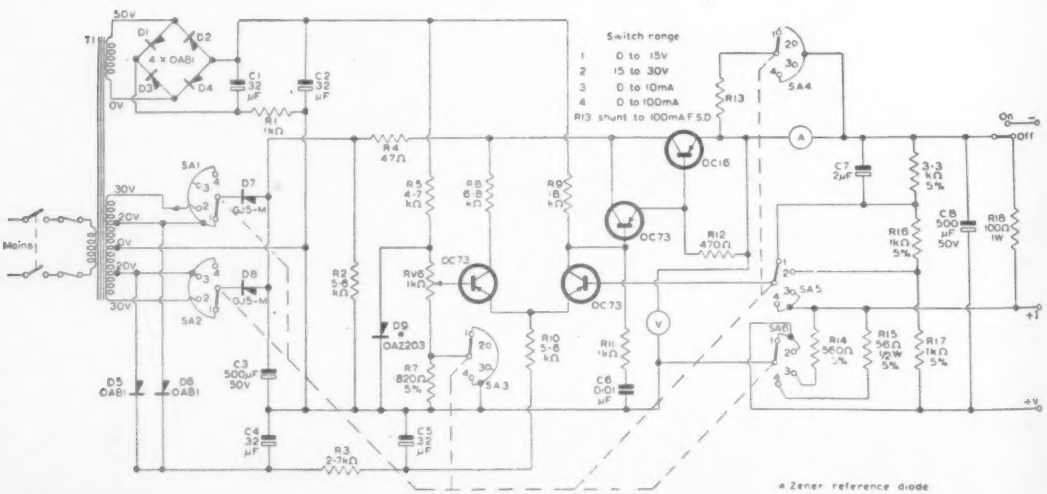

Mullard T.S.D. DATA and PUBLICATIONS SECTION, MULLARD LTD., MULLARD HOUSE, TORRINGTON PLACE, LONDON, W.C.1

MVM 392

XUM

JUNE 1958

Vol. 64 No. 6

Wireless World

Patterns of Trade

WHATEVER may be the outcome of the negotiations for the participation of the United Kingdom in a European Free Trade Area, its effects will not be fully felt for at least 10 years. During that period the pattern of world trade may have changed fundamentally, but in any case the general opinion seems to be that we should stand to gain rather than lose by joining a Free Trade Area.

In the meantime there is, in spite of tariffs of the order of 20%, a not inconsiderable trade with Europe and other continents in radio and electronic equipment with a balance in our favour. Total exports of components, transmitters, radar and navigational equipment, sound reproducing equipment, valves and domestic receivers to the value of £43M exceeded in 1957 those of any other group of the electrical industry. (Cables came second with £36.4M and generating machinery third with £35.1M.)

In the field of test gear there is an active exchange of equipment and ideas, again with a balance in our favour. At this year's Instruments, Electronics and Automation Exhibition at Olympia the atmosphere was very obviously international with a strong contingent of overseas visitors and many Continental firms exhibiting either independently or through their British associates or agents. One British firm with a high reputation for the originality and efficiency of its own designs and production methods announced its willingness to undertake the "anglicization" of foreign instrument designs and if expedient to produce them in this country. In the electronics field there would seem to be as much willingness to collaborate as to compete in satisfying the demands of an expanding economy. The removal of tariffs would accelerate these trends, but the fact that they have already started, in spite of existing restrictions, is significant.

The position of broadcast receiver manufacturers is less certain. Production capacity in all industrial European countries is more than sufficient for home needs and the removal of tariffs could greatly increase competition both at home and abroad. In the event of the establishment of the Free Trade Area individual firms might find their production costs too high for the mass market and some form of collaboration by the industry as a whole might be necessary to meet the situation.

But the mass market is not the only one, and there will always be other opportunities while there are customers who are willing to pay a little more for the product which is different. There is, for instance, a ready sale for Triumph TR2 sports cars in Germany, the land of the Volkswagen and the Mercedes, and it should not be beyond our wit to find and fill similar gaps in the range of European radio, audio and electronic equipment.

Leading Questions

THE answer given in a letter (page 278 of this issue) from the Public Relations Officer of the General Post Office is unlikely to turn away the wrath of those who, like "Free Grid" (May issue), have been asked to give a reason for non-renewal of their wireless licence.

We can find nothing in the Wireless Telegraphy Act, 1949, to support the contention that the Postmaster General has any specific obligation to see that people do not use broadcast receivers without his licence. He is authorized to issue licences, but the obligation of applying for one rests with the individual, who is guilty of an offence only if he installs apparatus (even if he does not use it) without being licensed to do so.

If the P.M.G. chooses to take upon himself the task of seeing fair play, why does he pick on those of us who at one time or another have held a broadcast receiving licence? Probably because it is easy. But the subjects of his catechism must feel rather like those unfortunates who are "known to the police".

Every citizen has the right if not the obligation to lay information with the police or a magistrate if he thinks he sees evidence that the law is being broken, and we would not deny the P.M.G. the exercise of this common right; but since he is so zealous in his search for information may we suggest that he writes also to those who have not so far taken out any licence, asking if they intend to do so, and if so why.

Standing Waves in Listening Rooms

Aural Effects Under Steady State and Transient Conditions

By J. MOIR*, M.I.E.E.

AFTER the publication in the October, 1957, issue of my contribution on "Loudspeakers in Parallel," Mr. G. A. Briggs pointed out† that paralleled and spaced loudspeakers did possess advantages in minimizing the standing-wave patterns in a room, a point not discussed in the original contribution. The following notes are intended to remedy this particular omission, though any exhaustive discussion of the use of paralleled speakers would require a complete issue of *Wireless World*. Thus the present contribution must, in military parlance, have "limited objectives."

First of all, what are standing waves and in what sense do they "stand"? These questions are best approached by considering the simple and substantially one-dimensional example of a long, narrow tube closed at one end and having a loudspeaker mounted in the other end as in Fig. 1 (a). Any pressure change (i.e., sound wave) produced by the loudspeaker will travel along the tube with a velocity of 1,125 ft/sec. A single short sharp pulse will be reflected by the closed end and, after travelling back down the tube, will be again reflected by the speaker end, a process that will continue until the sound energy in the pulse is absorbed by the tube wall ends. If the tube ends are of hardwood or sheet metal and make a really airtight joint with the tube, the sound wave will lose about 5% of its energy at each reflection.

When the loudspeaker is driven by an oscillator and emits a steady sine wave, the process is a little more complicated, particularly for the special case where the emitted sound wave has a frequency which makes the tube exactly one half wavelength long. A specific example would be a tube 11.25ft long with the speaker emitting a tone of 50 c/s, a wavelength of 22.5ft.

On connecting the oscillator at the instant the electrical signal passes through zero, sound pressure will commence to build up in front of the speaker cone and a sound wave will start to travel down the tube. One half cycle later the wave front will have reached the closed end and be reflected, with its phase reversed, back towards the loudspeaker, just as happened with the single short sharp pulse previously considered. Exactly one cycle after its departure the wave front (or 95% of it) will arrive back at the loudspeaker end and again be reflected with a change in phase, but as the two transits of the tube occupy exactly the time of one cycle the reflected wave will be in exactly the same phase as the second cycle of the wave just leaving the loudspeaker. On the assumption that the reflected wave has lost five per cent of its energy at each of the two reflections the energy in the outgoing wave will now be roughly 190% of the initial energy. This neglects some interactions that are not of importance in this demonstration. One cycle later the process will be repeated with roughly 81% of the energy of the first cycle, 90% of the second cycle and the full energy of the third cycle being emitted at that instant by the loudspeaker. Thus in a short time the sound pressure in the tube will build up by multiple reflection between the ends to a value ultimately limited by the energy losses in the tube and as the reflected waves are at all points in phase with the direct wave emitted by the speaker, a standing wave pattern will appear in the tube. (A simplified explanation of the process).

The sound pressure pattern is stationary only in the sense that a series of probe microphones inserted through the tube walls at several points would show that the *maximum* sound pressure at each point was constant, though the value would vary along the tube in the sinusoidal manner shown in Fig. 1 (b). If the tube end was open and "matched" by a

Fig. 1. In a closed tube (a) regions of maximum pressure always appear at the ends, and (b) shows the pressure distribution when the tube is λ/2 long. Pressure distributions for second and third harmonics are shown at (c) and (d) respectively.

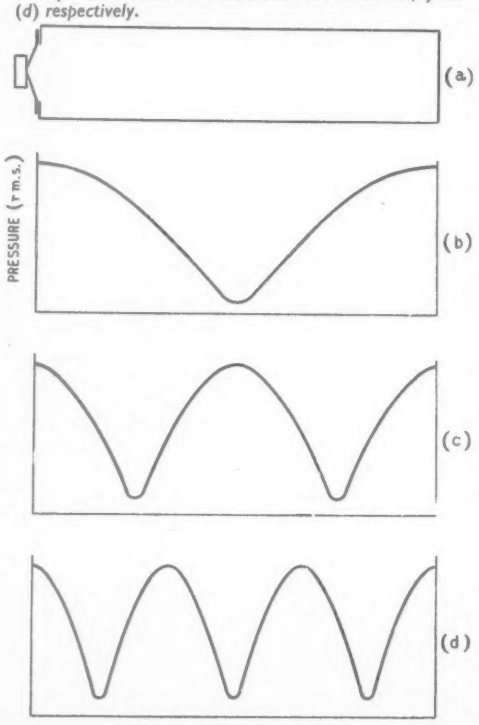

* Electronics Engineering Dept., British Thomson-Houston Co., Ltd.

† Letter to the Editor, Dec. 1957 issue, p. 592.

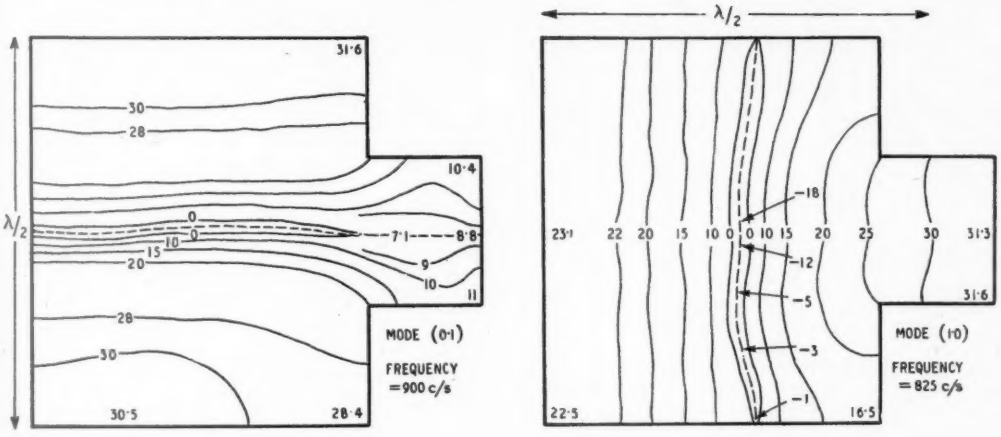

Fig. 2. Experimentally determined pressure distribution contours in a model room (See Ref. 1).

horn to the atmosphere then sound energy would flow smoothly and steadily down the tube and out into the air and there would be no return wave. Under these conditions the sound pressure developed at each probe microphone would rise and fall sinusoidally in the normal way as each wave emitted by the speaker passed down the tube and out into the air but the *maximum value* would be the *same* at all points along the tube. Similar conditions would exist if the closed ends of the tube were completely absorbent and permitted no reflection.

Exactly the same process occurs if the exciting frequency is such that the emitted wavelength is $\frac{1}{2}$, $\frac{1}{3}$, $\frac{1}{4}$, etc., of the tube length. In this case standing waves are developed in the closed tube but the pressure variations along the tube increase in number as shown in Fig. 1 (c) and (d).

It is convenient to indicate the amplitude of the standing wave patterns by expressing in decibels the difference between the maximum and minimum sound pressures developed at the anti-node and node respectively. The standing wave ratio that results is almost solely a function of the efficiency of the tube ends as reflectors. If the ends are of a hard, rigid, non-absorbent material the standing wave ratio is high, but if the ends are of a soft absorbent material the sound energy is greatly reduced at each reflection and the standing wave ratio is low. The whole process is exactly the same as occurs in the development of standing waves on radio feeders, an excellent example of the basic uniformity that underlies all wave motion in nature.

The process has been made clear by considering the conditions in a long narrow tube. However, when we use a tube in which the width of the tube is an appreciable fraction of a wavelength it is found that there are sound pressure variations *across* the tube in addition to the end-to-end variations. This is a condition more closely analogous to those that exist in rooms. In practical listening rooms both width and height are generally comparable with the length and this results in a three-dimensional sound pressure pattern even at the single frequency at which the room length is a half wavelength. R. H. Bolt[1] has published some pressure distribution patterns measured on two-dimensional model rooms and in Fig. 2 two examples are shown. They are interesting in that they indicate the sound pressure distribution over the room for the simple condition where the *length* is one half wavelength (Fig. 2 (a)), and in (b) the pressure distribution when the room *width* is one half wavelength. These results may be compared with the measured pressure distribution shown in Fig. 3 for one of my rooms at the frequency which makes the room length one half wavelength.

The measurements on the model and on the actual room both show irregularities in the pressure distribution that are not accounted for by simple theory. The bottom right-hand corner of the model room exhibits lower pressures than the top corner (the room is symmetrical and the pressure distributions should also be symmetrical), a discrepancy that Bolt ascribed to an air leak in the corner. The measurements in my room exhibit similar irregularities on the right-hand side in the vicinity of the two doors and the fireplace. It may be significant that the open flue to the fireplace is almost exactly one half wavelength long at the frequency at which the pressure distribution was checked.

Non-parallel Walls

There is a general impression that the amplitude of standing wave patterns is decreased by building the room with non-parallel walls but Bolt's work shows that this impression is not well founded. A room with non-parallel walls exhibits standing wave patterns of just the same peak-to-peak amplitude as a room of similar construction but having parallel walls. Non-parallel walls make it difficult to calculate the frequencies of the room modes and troublesome to visualize the pattern of sound pressure distribution in the room, but the patterns are just as strongly developed as in a room with parallel walls.

The pressure build-up that occurs in a practical room is almost entirely a function of the room

[1] "Normal Modes of Vibration in Room Acoustics," by R. H. Bolt. *J. A. S. A.*, Oct. 1939.

Typical Mode Frequency Distribution for a Room 15.3ft × 11ft × 8.2ft

Mode No.	Frequency	Mode No.	Frequency
1	36.77	11	103.7
2	51.14	12	110.3
3	63	13	112.1
4	68.63	14	112.8
5	73.9	15	119.1
6	77.85	16	121.6
7	85.57	17	125.9
8	89.7	18	128.5
9	93.15	19	129.9
10	100.7	20	137.3

construction though it is affected to a slight extent by the room furnishings. Calculation of the pressure rise is possible for rooms of simple shape but tedious and generally not worth while Measurement shows that typical rooms have a standing wave ratio of some 10 to 20 dB at the frequency at which the room length is one half wavelength and at the harmonics of this frequency.

So far discussion has been centred on the standing wave pattern developed as a result of reflection between the end walls with the wave passing down the length of the room, but similar standing waves develop as a result of reflection between side walls and between floor and ceiling. Fig. 2 (b) is an example of the pressure distribution at the frequency which makes the room width exactly one half wavelength and it is seen to have the same general shape as for the "length" mode though in this instance the pattern is complicated by the existence of an alcove. In each mode of propagation the lowest frequency is that making the width or height exactly one half wavelength, but each of these fundamental frequencies has a whole series of harmonics. In addition there are other series of resonances due to combinations of these dimensions but these are not of particular importance to the present problem and will not be further discussed at this point.

The whole series of room resonances are predicted by the Rayleigh equation—

$$f = \frac{c}{2}\sqrt{\left(\frac{A}{L}\right)^2 + \left(\frac{B}{W}\right)^2 + \left(\frac{D}{H}\right)^2}$$

where c=velocity of sound in air (approximately 1,125ft/sec), L=length, W=width, and H=height in ft. A, B and D may be each the integers 1, 2, 3, 4, etc.

The lowest frequency is obtained by making B and D=0 when the above expression simplifies to

$$f = \frac{c}{2L}$$

It is accompanied by an infinite series of harmonics having frequencies that may be predicted by making A=2, 3, 4, 5, etc.

The resonant modes due to the combined reflections between pairs of walls (one of the terms A, B, D being zero) or to the combined action of all three surfaces (none of the terms A, B, D being zero) are as powerfully developed as are the simple end-to-end reflections, but it is doubted whether their subjective effects are equally important.

These standing waves have an important effect in giving a characteristic "room tone" to any sounds produced in the room. The first effect will be fairly obvious. If room resonance gives an increase in sound pressure of 10-20 dB over narrow frequency bands, then peaks of that order will appear in the sound output from a loudspeaker which has a flat overall response when tested in the open air. The importance of these peaks will depend not only upon their amplitude but upon the frequency region in which they occur. If the music being played does not contain any appreciable amount of sound energy in the frequency region where the peaks are fairly well isolated from each other, then coloration is not likely to occur. It will be seen from the accompanying table that in a typical room the pressure peaks at the low frequencies are fairly well separated from each other, but as the frequency increases there is an increasing number of resonant modes, their spacing is diminished and the peaks stand out less obviously above the average sound pressure level In almost every instance the pressure peaks exist over certain well-defined areas of the room, a point illustrated by Fig. 3, and in many instances this makes the room coloration serious only over certain areas of the floor. One particular room in the writer's house has a rather obviously "bass heavy" region

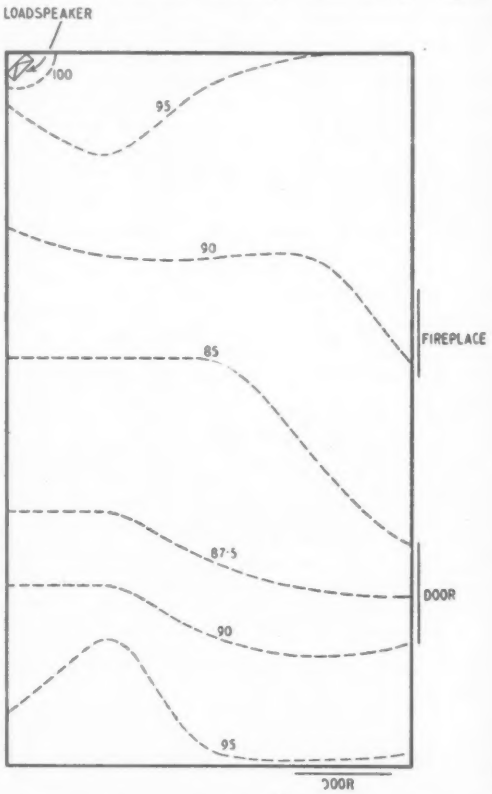

Fig. 3. Contours of equal sound pressure in a typical room when room length is one half wavelength. Figures on curves are sound pressures in dB above threshold.

over an area immediately in front of the fireplace and an equally "bass light" region over in one corner of the room. Where any of the room dimensions are 11ft or multiples of this figure, standing waves are likely to develop at mains frequency and its harmonics, and this may make mains hum serious only in certain parts of the room, a phenomenon that is regularly observed.

These may be called steady state effects in that the areas of the room that are "bass heavy" are easily discovered by exciting the loudspeaker from a variable frequency oscillator and listening carefully while perambulating around the room. However, there are transient effects that are not so easily demonstrated. When a wide frequency range signal such as speech or music is radiated by the loudspeaker the sound energy disappears gradually as it is absorbed by the walls and furnishings. During this decay period, which occupies about $\frac{1}{4}$ to $\frac{1}{2}$ second, the sound energy contained in the room undergoes a frequency changing process, being converted from the frequency at which it was emitted by the loudspeaker to the frequencies of the resonant modes. The remainder of the decay then takes place at these frequencies. Where there are two resonant modes close together in frequency, low frequency beats occur at the difference frequency as the sound decays.

In combination, the steady state and transient effects are mainly responsible for "room boom" and "single note bass" so typical of many small rooms. These are troubles that become increasingly serious as the room dimensions are reduced, for this brings the low-frequency modes higher up the frequency range where there is greater energy content in the spectrum of speech and music and where they are subjectively more obvious. There is no critical minimum size of room that gives acceptable reproduction, but any room less than about 15ft long begins to pose special problems.

Excitation Point

Having considered how standing waves are produced and their characteristic frequencies, let us have a look at the effect of speaker position on the pattern.

The sound pressure produced in an enclosure by a loudspeaker is a function both of the electrical input to the speaker and the efficiency of acoustic coupling between the speaker diaphragm and the air in the room. The efficiency of the acoustic coupling depends on the position of the speaker with respect to the standing wave system, the maximum coupling being secured when the speaker is standing at an anti-node (point of maximum sound pressure) and the minimum coupling at a node point of minimum pressure. For the simple example where the frequency has the value that makes the room length exactly one half wavelength, the maximum coupling and the maximum sound power output will be obtained when the speaker is mounted on the end wall facing down the room length. Minimum acoustic coupling and minimum sound power output will be obtained when the loudspeaker is standing at the node in the middle of the long wall.

At first thought it seems reasonable to assume that the standing wave ratio will be reduced by standing the loudspeaker at a node, but further consideration will show that this expectation is not well founded. The standing wave ratio (ratio of maximum to minimum pressure in dB) is a function only of the amount of reflection by the end walls and is not affected by the loudspeaker. However, placing the speaker at the node may be expected to lower the level of both maximum and minimum by the same factor and thus decrease the amount by which the resonant peak projects above the general sound level. The reduction in height of both maxima and minima obtained by moving the loudspeaker from anti-node to node proves to be equal to the value of the standing wave ratio in dB.

At this point it might prove interesting to forsake theory for a little practice and get some experimental confirmation of the theoretical points just discussed, for some of them contradict the commonly held views on the subject. It is not particularly easy to get positive and repeatable evidence, a common trouble with acoustic measurements. In an actual room the standing wave pattern shifts slightly when the speaker is moved and the position of the node has to be redetermined each time the speaker is moved. The simplicity of the standing wave pattern suggests that the lowest modes be investigated, though it is not too easy to produce adequate distortion-free power at frequencies in the region of 25 c/s. Repeatable results are only secured by the use of suitable bandpass filters in the microphone circuit to ensure that only the sound pressure distribution at the fundamental frequency is being measured.

Standing Wave Ratio

With these precautions the standing wave ratio was measured in the room shown in Fig. 3. For the first test the speaker was mounted in the centre of the short wall and facing down the room. Sound level measurements were taken at 3-ft intervals along a line down the room though the position of the node was determined more precisely and showed a standing wave ratio of 11 dB. The speaker was then moved to the nodal position approximately in the centre of the long wall and the measurements repeated, the standing wave ratio proving to be 10 db. A spot check immediately before and after moving the speaker from anti-node to node showed that the sound level at both anti-node and node had dropped by 11.5 and 12 dB respectively. The tests were repeated for the width mode giving standing wave ratios of 8 and 7.5 dB for speakers standing at the node and anti-node. Moving the speaker from anti-node to node reduced both maximum and minimum sound pressures by 8 dB. These results give a substantial measure of confirmation to the suggestion that the standing wave ratio is not affected by the position of the speaker in the room.

Though the s.w.r. is not reduced by the change in speaker position, it is seen that there is a useful reduction in the amplitude of both maxima and minima of the standing wave. This is a significant reduction and it raises hopes that some overall improvement in sound quality can be obtained by a suitable choice of speaker position. However, hopes are rapidly dashed when it is realized that the nodal point for the lowest mode is the point of maximum pressure for other harmonics. Thus moving the speaker from the end wall to the centre of the long wall reduces the amplitude of the lowest

mode by 10-12 dB but it is likely to increase the amplitude of the third harmonic mode by about the same amount.

Nevertheless, an overall improvement in sound quality may result from shifting the speaker, for as the table shows, the lowest mode room resonances generally stand isolated from the next highest modes merely due to the fact that the average room has one dimension much greater than either of the others. An isolated mode $f=51.1$ c/s or group of modes such as $f=110.3$, 112.1, 112.8 c/s shown in the table is much more serious than a mode such as that at 128.5 c/s in the middle of a large number of other modes all of roughly equal amplitude.

Two Loudspeakers

The next step is to consider whether anything is to be gained by using two speakers in parallel and spaced round the room in the hope of minimizing the sound pressure build-up in a number of modes. Once again the effect on the lowest frequency mode will be considered because of its simplicity. At an earlier stage it was shown that moving a single speaker from the anti-node to the node reduced the height of the sound pressure peak by an amount equal to the standing wave ratio. Two similar speakers in parallel will dissipate equal amounts of electrical power, but it was earlier noted that the loudspeaker standing at the node will be more inefficiently coupled into the room and will have an acoustic output lower by the amount of the standing wave ratio than its fellow speaker standing at the point of maximum pressure. With standing wave ratios in the range of 10-25 dB the speaker standing at the nodal point will make a negligible contribution to the total sound power. Once again our hopes of reducing the standing wave ratio by an appropriate choice of speaker position are dashed.

This point was also given an experimental check. With the two speakers standing side by side against the end wall, it was found that the addition of the second speaker raised the sound level by about 5 dB but if the second speaker were standing at a node there was less than 0.5 dB increase in sound level when it was brought into circuit.

Thus, theory suggests, and experiment confirms, that there is little to be gained in the way of reducing the standing wave ratio either by placement of the speaker or by the use of two speakers in parallel.

Though spaced speakers in parallel appear to offer no particular advantage in reducing standing wave troubles, it should not be inferred that this means that they do not improve the quality of reproduction. Showing that one particular explanation lacks confirmation does not prove that paralleled speakers do not improve the quality of sound, it merely indicates that we should seek another explanation once it has been established that there is some improvement. First of all, do two *spaced* speakers sound better than a single speaker; the word spaced being emphasized to indicate that the problem is not the same as when using two loudspeakers mounted together in a single enclosure.

This is a problem on which it is impossible to offer any soundly based theoretical advice, for we are woefully ignorant about all the factors that the hearing system considers important when assessing sound quality. Experiment is the only approach that can be trusted, though it is important to bear in mind that a real judgment demands a group of listeners rather than a single individual, however skilled he may be. The following comments are my own judgment and should therefore be treated with caution.

In my own room (21ft × 12ft × 8ft) two speakers in the same plane (both back against the end wall, Fig. 4(a)) and spaced about 8ft apart, have the normally expected advantages of increased efficiency in the bass. Peculiar results can be obtained if the listener sits on the axis of the two speakers, particularly when the two units have responses that differ slightly, but in general the results are not liked. Source size is not increased by any significant amount when the second speaker is brought into circuit, the overall results having been more fully described in the October, 1957, issue which might usefully be read in conjunction with the present discussion.

However, it was noticed that a listener seated back against the long wall in position LP1 Fig. 4(a) thought that the reproduction of music was improved when both speakers were working, but only when the second speaker S2 was back against the wall pointing down the room. During the investigation of the effect of two speakers on the standing wave system, it was noted that there was a marked improvement in quality when the arrangement of Fig. 4(b) was used. This was particularly interesting, for the previous measurements had shown that this arrangement of speakers gave no improvement in standing wave ratio. Very little investigation was needed to confirm that the improvement in sound quality was due to an increase in the amount of reverberant sound, for the improvement was greatest when the second speaker S2 was turned away from the listener. As might be expected, the quality of speech deteriorated considerably when the second speaker was in use, the position of the announcer being vague and remote.

If the improvement in the reproduction of music is really due to the additional reverberation, it suggests that a second channel might be used to transmit reverberant sound only for reproduction through separate speakers in the listener's room. Some simple experiments confirm that reproduction of the

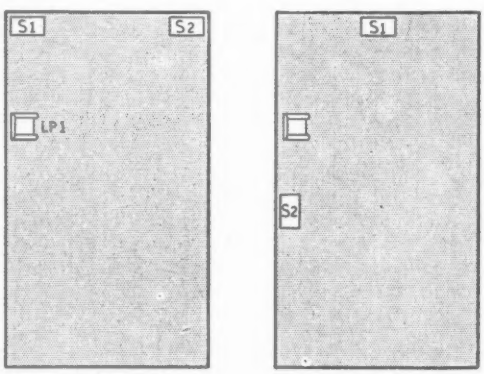

Fig. 4. Alternative positions of paralleled loudspeakers in the author's living room.

reverberation through separate speakers does effect a significant improvement in the quality of music reproduction though there is no doubt that when they are available, two separate channels are more usefully employed for a stereophonic reproducer system.

It is tempting to believe that the additional reverberation could be added by merely removing the microphone further from the sound source in the studio or by adding artificial reverberation in any of the well-known ways. Simple and obvious though this may seem, it fails to produce the desired results, for it is then necessary to reproduce both the direct and the reverberant sound from the same speakers. Direct and reverberant sounds approach the listener from the same direction and all the advantages are lost.

All the foregoing discussion has been concerned with the effects of standing waves in small (domestic sized) rooms and it is natural to consider their effects in large (theatre sized) rooms. If the first twenty or thirty resonant frequencies are calculated from the Rayleigh formula, it will be found that for a typical theatre, perhaps 140ft × 80ft × 40ft, they will all fall into the frequency band below about 15 c/s. Above this frequency they become very closely spaced and thus less important. It would appear that while there is little or no reduction in standing wave ratio to be gained from the use of multiple speakers in small rooms, there is even less to be gained in large rooms. Once again, it should not be interpreted to mean that multiple speakers have no advantages in large rooms. Mr. Briggs has stated that he has found that multiple speakers have proved very advantageous both in the Royal Festival Hall and in the Carnegie Hall in New York and I have not the slightest doubt that he is right in this.

My thanks are due to Chapman and Hall for permission to quote from my book "High Quality Sound Reproduction."

Standards for Stereo Disc Records

A Statement Issued by the Companies Represented at the Zurich Conference

THE present-day gramophone enjoys the advantage of an international dimensional standard and it is extremely important that any major development which necessitates a departure from these existing standards should be discussed in the broadest possible manner in order to establish the new set of standards which may also be acceptable to everyone interested in the development and manufacture of discs and replay equipment throughout the world. The development of the stereo disc has now passed the stage of possibility and is now a clear probability for the very near future. In order to avoid ambiguity with regard to the technical intentions of the various companies a meeting was held in Zurich last November with representatives of the European record manufacturers known to be active in the field of stereo disc recording. This *ad hoc* committee came to a unanimous decision to recommend the adoption of what is now defined as the 45/45 system, but withheld the publication until it was quite clear that these were in accord with the recommendations of the Record Industry Association of America. It is now certain that the U.S.A. recommendations will be in complete agreement with those arrived at independently at Zurich and therefore it is now considered safe to release details of the standards for the 45/45 system for publication.

Wherever possible the existing standards for microgrooves as laid down by the British and International Electro Technical Commission standards will be maintained. Thus the diameter of the disc, the speed and the recording characteristics will remain unchanged. It is however, necessary to reduce the radius of the reproducing point and the recommended limits are 12.5 microns minimum radius and 15 microns maximum radius. The angle of the reproducing point will remain the same as at present. The maximum radius of the bottom of the groove will be five microns, but the included angle will remain unchanged.

For the better understanding of the definitions which are to follow, the notation with regard to left and right channels will be as laid down in the I.E.C. publication No. 94 "Recommendations for magnetic tape recording and reproducing systems" in which the right-hand channel is defined as that which supplies the right-hand speaker as viewed by the audience.

The stereo disc will carry two channels of information arranged as follows:—

1. The two channels are recorded in such a manner that they can be reproduced by movement of the reproducing stylus in two directions at 90 degrees to each other.

2. The right-hand loudspeaker is actuated only when there is movement on the axis which is inclined at 45 degrees to the disc surface and intercepts the axis of rotation of the disc above the surface.

In normal practice the groove angle is nominally 90 degrees and for this particular case the two channels can be said to be recorded in such a manner that the right-hand loudspeaker is actuated by a modulation normal to the surface of the groove wall which faces the axis of the disc, and the left-hand loudspeaker is actuated by a modulation of the groove wall which faces away from the axis of the disc. The surface modulations of each groove wall will be 45 degrees to the plane of the disc and 90 degrees to each other.

3. A movement of the stylus point in a direction parallel to the surface of the disc shall provide equal, in-phase, acoustical signals from the loudspeakers.

It follows, from clause 3 above, that pickups designed for stereo reproduction will be suitable for playing normal microgroove single channel records. However, the majority of present day pickups are designed for single channel operation and are fitted with a larger stylus point than is recommended for stereo discs and many of them offer a high mechanical impedance to the vertical movement of the stylus and hence are not suitable for playing stereo discs.

C.O.I. Films

A LARGE number of films of interest to a wide variety of industrial audiences can be hired or borrowed free of charge from the Central Film Library of the Central Office of Information, Government House, Bromyard Avenue, London, W.3. The catalogue, "Films for Industry," and supplement containing details of over 700 films and filmstrips cost 2s.

"Atlantic Link," a colour film (recently shown publicly), giving an account of the manufacture and laying of the first transatlantic telephone cable with its 120 repeaters, is now available for private showing. It runs for 19 minutes and costs £1 to hire.

Marconi Doppler Navigator

FURTHER TECHNICAL DETAILS AND A FLIGHT DEMONSTRATION

THE Doppler principle and its application to the measurement of the ground speed and drift of an aircraft have already been described*. Briefly, the modified frequencies of the energy returned from four radio-frequency beams directed to the ground fore and aft and to port and starboard of the aircraft are compared. If the axis of the aerial system is rotated until the port and starboard return frequencies are equal it will be lying parallel to the course over the ground; the magnitude of the frequency difference between fore and aft beams is proportional to the speed over the ground.

In practice, one of the difficulties of a simple c.w. system is break-through between transmitter and receiver. This has been overcome in the Marconi Type AD2300 by the use of frequency modulation. The amplitude of sidebands resulting from the mixing of a part of the transmitted with received signal is a function of the time delay, and is theoretically zero for no time delay or for delays equivalent to integral cycles of modulation. By choosing an optimum modulation index and a high modulating frequency (500 kc/s) the minima are closely spaced and are smoothed by the spread of Doppler frequency consequent on the use of a beam of finite width. The choice of a high modulating frenquency and the selection of a high-order sideband for i.f. amplification reduces noise and vibration amplitude modulation whose sidebands are grouped closer to the carrier.

In addition to automatic drift alignment in the horizontal plane the aerial system of the AD2300 is stabilized for pitch in the vertical plane up to 10° by signals arising from differences in forward and backward Doppler frequencies.

Automatic following of the Doppler frequency by a phonic wheel motor is achieved by continuously scanning the whole Doppler spectrum and comparing the output with the phonic wheel frequency. The resultant difference frequency is fed to an integrator which varies the motor speed to follow changes in the Doppler centre frequency. Without any manual adjustment this circuit finds and locks on to the signal. If for any reason the signal disappears temporarily, a memory circuit keeps the phonic wheel running at the last controlled speed until the signal reappears. The distance flown is indicated by a mechanical decade counter which does not require calibration; the indication is a function of the Doppler frequency and the calculated number of teeth on the phonic wheel.

We have had the opportunity of seeing this equipment in action in a Viking aircraft on a test

Demonstration AD2300 Doppler navigator installed in a Viking aircraft of Airwork, Ltd.

* *Wireless World*, 1957, May, p. 225; Aug., p. 396; Oct., p. 460.

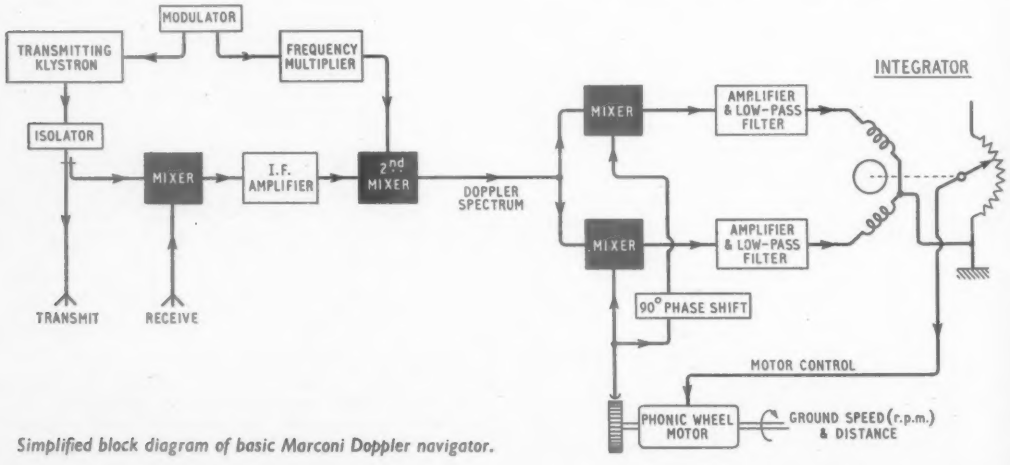

Simplified block diagram of basic Marconi Doppler navigator.

flight of 106 miles. A modified demonstration model showing the aircraft position in miles of "northing" and "easting" was used (a full computer for latitude and longitude is available) and the readings at the start and finish of the flight showed an error of 2.2 miles in northing and only 0.2 miles in easting, this with a 40-knot wind and with a variety of steep banking turns, 360° circles, fast rates of climb and dive and other manœuvres which would not normally be inflicted on airline passengers, but which were introduced to show the responses of the navigator. A run over the aerodrome at a height of 50ft showed the indicators to be still working normally, and we noticed on landing that the indicator lamps did not show lack of synchronization until the aircraft was as low as 15ft from the ground. Under normal flying conditions there is little doubt that the makers' claim of 0.5% accuracy in distance flown, 0.5% ± 3 knots in ground speed, ±0.25° in drift angle and position accuracy to within 1% of distance flown when heading is down to within ½° could be substantiated.

Navy's New Radar

Computers in Fighter Control and Early-warning Radars

THE aircraft carrier H.M.S. Victorious has been "reconstructed" to modern standards. One of the new pieces of equipment fitted during this process is a complete early-warning and tactical-operation control radar system, giving accurate interception data—height, range and bearing—simultaneously. This is achieved by the use of a complex scanning system embodied in one aerial assembly resembling, in external appearance, a very large head-lamp. This aerial produces several separate narrow rotating pencil beams, one of which is fixed in elevation to give early-warning coverage. As the aerial rotates the other beams scan overlapping vertical sectors, in synchronism, so that the maximum possible amount of information about the target is obtained in one scanner rotation. This is essential to the successful interception of targets travelling at high speeds in the short time available for defensive action to take place. All the beams are focused by a common lens made up by spot-welding together many pieces of aluminium wave guide of differing cross-sections and lengths. The whole aerial assembly (including transmitters and head amplifiers) weighs 27 tons and the lens is 14 feet in focal length with an aperture of f 1.

Another difficult problem which has been overcome is maintaining the i.f. output from the mixers constant in frequency. The aerial system does not achieve a perfect impedance match to the power source because the distance the r.f. has to travel varies from pulse to pulse as the beams scan vertically. This can "pull" the frequency of the transmitter magnetron, and the receiver local oscillator has to follow this change of frequency to maintain a constant i.f. The problem is further complicated by the use of separate receivers for each pencil beam. The a.f.c. system developed corrects, on a pulse-to-pulse basis, for deviations from the nominal transmitter frequency.

Control of the whole radar system is carried out from a central control desk below decks, where a computer is fitted to process and store all the information gained from the radar system. This information is then presented in a clear and comprehensive manner to the people making tactical decisions. The computer provides a display of when and where interception will take place from data supplied by the radar and instructions given to the interceptor by the controlling officer.

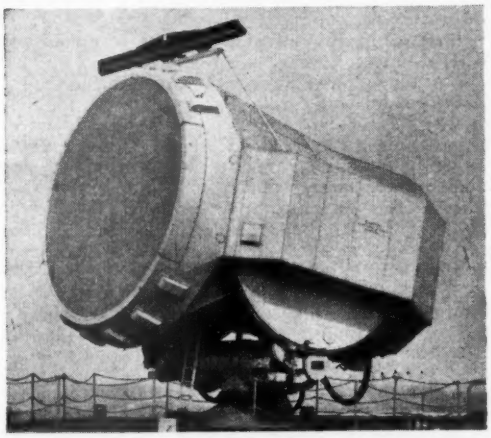

[Photographs: Crown Copyright Reserved]

Above: Aerial and its mounting. The complete assembly is supported on a single deck-ring. Below: General view of part of display processing equipment.

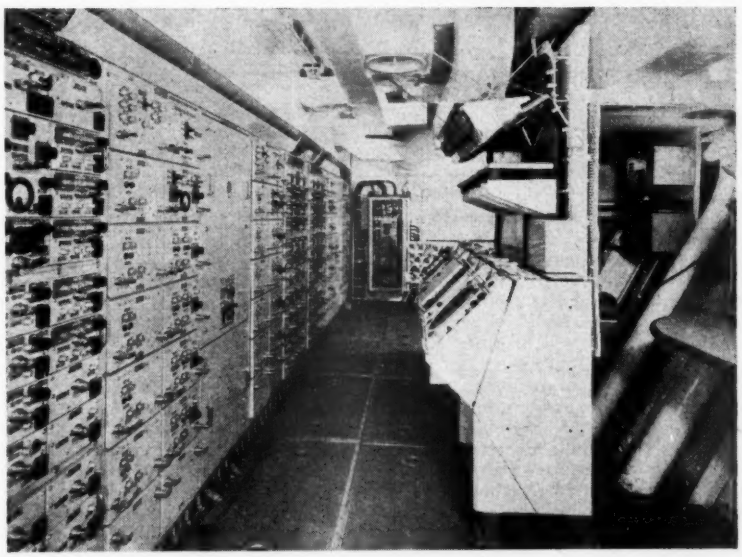

Variable-Output Mains Transformer

REVISED DESIGN PROVIDING WIDE RANGE OF VOLTAGES

By H. E. STYLES, B.Sc.

IN an article published in the August, 1951, issue of *Wireless World*, the writer described a method of constructing a mains transformer capable of providing an output which could be adjusted to any integral value of voltage between zero and 280 volts. The design of this component was based upon the fact that, from the series 0, ± 1, $\pm 3^2$, $\pm 3^3$, $\pm 3^4$, . . . $\pm 3^{n-2}$, terms can be selected so as to obtain any desired integral value.

This series was reproduced by providing secondary windings of 1 volt, 3 volts, 9 volts, 27 volts, etc., any of which could be connected together in or out of phase so as to correspond to the plus or minus values of the series. For voltages above 40, the transformer primary was connected in series with the chosen secondaries to give, in effect, an auto-transformer. Complete isolation from the mains was thus achieved only for the lower range of output voltages.

The foregoing transformer has proved to be an invaluable laboratory component but it has nevertheless been found to suffer from the following minor drawbacks:—(1) The design demands the use of a number of three-position, double-pole switches suitable for mains voltages and relatively heavy currents. Such switches are neither very readily obtainable nor cheap. (2) The necessary use of positive and negative switch positions tends to complicate computation of net output voltage and thereby introduces a liability to error in setting. (3) Isolation of output from the mains is often desirable at voltages greater than 40. (4) Connection of windings in opposition leads to increased copper losses which should be avoided if possible.

At the cost of no more than a slight increase in the number of secondary windings employed, the drawbacks enumerated above can be avoided by designing on the basis of a different mathematical series. Most readers will no doubt be familiar with the binary system of numbers represented by the series 0, 1, 2, 2^2, 2^3, 2^4 . . . 2^{n-2} from which it is again possible to obtain any desired integral value by selection of appropriate terms. In this case, however, all terms are positive and no need arises therefore for providing for any form of subtraction procedure.

A multi-output transformer based upon this series is shown diagrammatically in Fig. 1. It will be seen that the only switches required are of the single-pole, change-over variety of which many types suitable for mains voltages and currents are readily available at reasonable cost. The circuit of Fig. 1 enables any integral voltage between 0 and 255 volts to be obtained at will by operation of no more than 8 switches all of which correspond to positive values which can readily be added with little risk of error. Moreover, throughout the whole of this range of voltages, the transformer output is completely isolated from the mains input.

If desired, and provided that the transformer is wound with an even number of turns per volt, closer adjustment of output voltage can be achieved by the incorporation of one additional switch, together with a half-volt winding, which will provide for selecting any voltage throughout the whole range to within half a volt of the desired value.

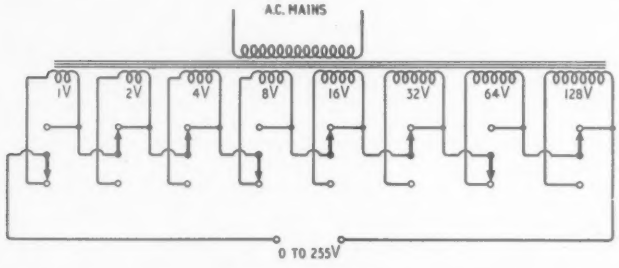

Fig. 1. Mains transformer giving any integral output voltage from zero to 255 with secondary isolated from primary.

The circuit shown in Fig. 2 enables the maximum output voltage to be raised from 255 to 511 volts whilst still retaining the facility of voltage adjustment to within half a volt throughout the whole range. This extension of range is simply achieved; the necessary modifications comprising merely the provision of a two-pole change-over switch (readily obtainable) and a 256-volt tapping on the primary winding of the transformer. The additional primary winding tappings shown in the circuit of Fig. 2 serve the purpose of matching the primary to mains supply voltages ranging from 221 volts to 261 volts, in steps of 5 volts provided by the tappings at the "line" end of the primary. These primary input tappings also enable adjustment of output voltage to within about one per cent of the nominal value indicated by the selected switch positions.

With the circuit of Fig. 2, outputs at voltages greater than 255.5 volts are, of course, no longer isolated from the mains supply. Warning of the change over to auto-transformer operation is automatically provided by means of a small neon indicator connected across the centre contacts of the two-pole change-over switch. A 2-volt flash-lamp bulb connected across the 1-volt secondary winding likewise serves to indicate when the transformer primary is energized.

The size and precise design of the transformer can

XUM

be varied according to the particular purposes for which the component is required. Thus, for example, the lower-voltage secondary windings may be wound with heavier gauge wire to permit power loadings appropriate to the lower voltages, in which case the switches employed must also be of sufficient current carrying capacity. Alternatively, all secondaries can be wound with wire of the same gauge as the primary, in which case the output current must always be limited to that corresponding to maximum transformer output permissible when used as a simple 1 : 1 ratio mains transformer. The same current can, however, be drawn with the transformer auto-connected to give outputs greater than 255 volts as, despite the increased power loading, the current through the primary winding will remain below the limiting value up to the maximum output of 511 volts.

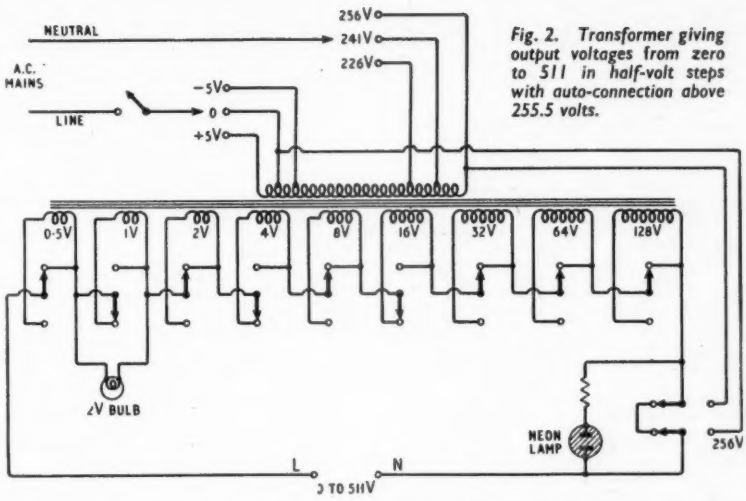

Fig. 2. Transformer giving output voltages from zero to 511 in half-volt steps with auto-connection above 255.5 volts.

If it be desired to employ the instrument for calibration tests on voltmeters, etc., care should be taken to ensure that the turns per volt of the transformer winding are sufficiently high to avoid waveform distortion arising from saturation of the iron core material. On the other hand, if the device is intended for use as a means of controlling, say, heating or motor-driven equipment, a lower turns per volt figure may be preferred so as to permit the use of a heavier gauge of wire, core saturation being limited by considerations of iron loss rather than wave-form distortion.

The versatility of the transformer can be further increased by incorporating an independent winding giving 6.5 volts with tappings at 2.0 and 2.5 volts. This will provide also 4 volts between the 2.5- and 6.5-volt tappings and thus enable supplies to be obtained for the filaments or heaters of a variety of valves. In addition, a separate, well-insulated winding of appropriate voltage can be incorporated so as to provide heater current for a valve rectifier. The latter, or a metal rectifier, can then be used in conjunction with this transformer to provide a variable d.c. supply, smoothed by a normal combination of capacitors and choke. Together with the separate low-tension windings, this will provide a useful source of power for valve testing, operation of experimental hook-ups and so on. One advantage to be derived from using a tapped transformer of this kind is that a particular voltage setting can be repeated precisely, whereas this is not often the case with devices employing variable resistances.

Instructional Films on Transistors

FIVE new 16-mm sound films have recently been produced by Mullard to illustrate the basic principles of semiconductors, transistors and their application in radio receiver circuits.

"The Transistor—Its Principles and Equivalent Circuit" lasts 15 minutes and is in colour. It is at a fairly high technical level and a detailed analysis of the complete and approximate equivalent circuits used in design is preceded by animated diagrams showing current carriers under different circuit conditions. This film serves as an introduction to "The Junction Transistor in Radio Receivers," which is in two parts: 1.—"Design of an I.F. Amplifier" (15 minutes) and 2.—"The Complete Receiver" (10 minutes). A third film, "The Manufacture of Junction Transistors" (10 minutes) gives a close view of the techniques employed at the Mullard factory at Southampton. All the foregoing are available from the Publicity Division of Mullard Ltd., Torrington Place, London, W.C.1.

Another 16-mm sound film, "The Principles of the Transistor" (20 minutes, black and white), and a colour film strip, "Semiconductor Devices" (35 mm), have been produced for teaching by the Mullard Educational Service in collaboration with the Educational Foundation for Visual Aids to whom schools should make application; other organizations should apply to the Mullard Education Service.

B.S.R.A. Constructors Competition

THIS was held this year in conjunction with the British Sound Recording Association's exhibit at the London Audio Fair, and the President's Cup and the Guy R. Fountain Award were won by B. H. Parks with an optical tape locating device in which an OCP71 photo-transistor housed in one of the tape guides is energized by light passing through narrow gaps in the tape coating. These are easily made after the coating has been softened by a solvent such as acetone, and, if made *before* recording, the erase head removes any magnetic disturbance. An associated relay system enables any pre-determined point on the tape to be rapidly located.

The judges awarded the *Wireless World* prize to R. J. Fearn of Dundee for two beautifully finished lightweight moving-coil pickups tracking at 3 gms and 6 gms on 33⅓ and 78 r.p.m. records respectively.

A third prize was given to A. J. Harper for a pickup lowering device and an adjustable tweeter mounting.

WORLD OF WIRELESS

Flat Tube Demonstrated

THE Gabor-N.R.D.C. flat cathode-ray tube, described in our December, 1956, issue, was demonstrated at the I.E.E. on May 14th to a large audience. A horizontal line was traced on the slightly bluish phosphor and was made to give a "one-shot" type of scan in the vertical direction by manual operation of a switch. One possible method of achieving colour reproduction in the tube was demonstrated on a small section of phosphor material which changed colour when the energy of the electron beam was varied. Industry representatives at the meeting were frankly critical of the practicability of the tube design for mass-production techniques, but Dr. Gabor and his co-workers continued to assert that for colour television it was essentially simpler than the existing shadow-mask, beam-switching and beam-indexing tubes.

Standard Frequencies

IN accordance with the Atlantic City Convention the carrier frequencies of all B.B.C. short-wave transmitters are maintained to within ± 30 parts in 10^6, but in practice they rarely exceed the limits of ± 10 parts in 10^6.

For some years three short-wave transmitters, GRO (6.180 Mc/s), GSB (9.510 Mc/s) and GSV (17.810 Mc/s) and the 200-kc/s Droitwich transmitter have been guaranteed to have a stability of better than 1 part in 10^6 (sub-standard carrier).

From May 1st the three short-wave transmitters are no longer being maintained as sub-standard carriers. It is stated that this has been done to "provide for greater flexibility in the use of these frequencies between the overseas service transmitting stations."

The 200-kc/s transmission, which incidentally is used by the B.B.C. to control the carriers of a number of low-powered unattended transmitters in the U.K., will continue to be maintained as a sub-standard carrier. The results of measurements made daily by the National Physical Laboratory on the Droitwich transmission are given each month in our sister journal *Electronic & Radio Engineer*.

Audio Fairs

MORE than 47,000 visitors attended this year's London Audio Fair, and at one period the percentage of men was said to be as high as 97. This year's attendance was some 7,000 more than in 1957.

Plans are being made to hold an Autumn Audio Fair again in Harrogate (Oct. 24th to 26th). Audio Fairs Ltd., the organizers of both the London and Harrogate shows, is a non-profit making concern consisting of an honorary council of management under the chairmanship, this year, of D. A. Lyons, of Trix. The other members of the council are: G. Spark (M.S.S.), vice-chairman; L. H. Brooks (M.S.S.), secretary; M. L. Berry (Trix); J. Maunder (Vitavox); H. Slade (Garrard); T. R. B. Threlfall (Goodmans); and V. G. P. Weake (Pamphonic).

V.H.F. Ship-Shore R/T

TELEPHONE calls between U.K. subscribers and suitably equipped ships within a 40-mile radius of the North Foreland radio station will be possible within a few months. The G.P.O. introduced a similar service in the Firth of Clyde last May and is planning the installation of v.h.f. radio-telephone equipment in several other coast radio stations, including Niton (Isle of Wight), Mablethorpe (Humber) and Land's End.

The frequencies to be used by North Foreland are those internationally agreed at the Hague Maritime V.H.F. Radiotelephone Conference (January, 1957)—156.8 Mc/s calling, 161.9 Mc/s transmit, and 157.3 Mc/s receive. Transmissions will be frequency modulated.

Marconi's have been awarded the contract for equipping North Foreland and four other stations with the necessary v.h.f. gear.

B.R.E.M.A. Report

THE continued trend of reduced retail prices of domestic sound and television equipment is mentioned in the report of the British Radio Equipment Manufacturers' Association. It quotes the Board of Trade Wholesale Price Index which (with June, 1949, as the base rate of 100) shows that beween 1954 and 1957, prices of sound receivers came down from 98.7 to 91.7%; TV receivers from 83.8 to 75.4%; and radiograms from 95.8 to 89.6%. During the same period the index for domestic electrical appliances as a whole rose from 111.7 to 115%.

The value of home sales of domestic receivers (at ex-works prices) last year was £83.3M, which was 22% above the 1956 figure but 4% below the 1955 total. Exports, too, were below the 1956 figure—£3.4M compared with £3.6M.

It is announced that it is proposed to form within the association a group for audio equipment manufacturers.

Earls Court

AN innovation at this year's National Radio Show (Earls Court, Aug. 27th to Sept. 6th) will be the inclusion of a number of sound-proof demonstration rooms in a section of the hall devoted exclusively to audio firms. All the 45 stands in this section, which will be on the First Floor, were allocated at the ballot on April 30th, although a few spaces remained unlet on the ground floor.

Technical Authorship

FOR some time the City & Guilds of London Institute has been considering the need for courses and examinations in technical authorship, and a scheme has now been prepared. The normal course of part-time instruction will extend over four years and amount to at least 600 hours study. The first intermediate examination will be held in 1960 and the first final examination the following year.

XUM

Television Society Premiums

THE Television Society has awarded Premiums to the following authors for papers read at London meetings of the Society in 1956/57:—

Dr. D. Gabor, F.R.S. (Imperial College), The *Wireless World* premium for "A New Picture Tube".

Dr. E. L. C. White (E.M.I. Research), the Mervyn premium for "Alternatives to the N.T.S.C. Colour System".

S. N. F. Doherty and P. L. Mothersole (Mullard Research), the Mullard premium for "Automatic Gain Control Circuits in Television Receivers".

Dr. J. A. Saxton (D.S.I.R. Radio Research Station), the E.M.I. premium for "Scatter Propagation and its Application to Television".

Dr. R. Pearce (E.M.I. Research), the *Electronic Engineering* premium for "The Return of Electrostatic Focusing".

Ian Atkins (B.B.C.), the Pye premium for "Studio Production Techniques".

Smale House.—Cable & Wireless have honoured J. A. Smale's long service and distinguished contribution to international telecommunications by naming its new five-storey building in Kirby Street, London, E.C.1, Smale House. Mr. Smale was with C. & W. from 1929 to 1957, and was for the last nine years engineer-in-chief. The development and workshop production sections of Cable & Wireless will be transferred from Radio House, Wilson Street, E.C.2, to Smale House. The staff numbers about 100.

Television Society Council.—The following were elected at the annual general meeting on May 9th to fill the vacancies on the council of the Television Society:—V. J. Cooper, Marconi's chief television engineer; C. L. Hirshman, Siemens Edison Swan's chief consulting and applications engineer; T. C. Macnamara, technical controller of Associated Television; and N. E. B. Wolters, executive controller of TV films and radio division of Napper, Stinton and Woolley.

R.I. Club.—Membership of the Radio Industries Club, which holds a monthly luncheon meeting in London and organizes the annual Radio Industries Ball, is now 952. The new president of the club is Sir Robert Fraser, director-general of the Independent Television Authority. W. E. Miller, managing editor of *Wireless Trader*, who was secretary of the club for nearly 18 years, is elected a vice-president. Collections for trade charities taken at the luncheons during the past year totalled £364, to which is added £262 resulting from the 1957 ball.

A.T.C. Recorders.—The first of a series of magnetic-tape recording installations for the principal airports of the Ministry of Transport and Civil Aviation is to be installed at Gatwick Airport. Manufactured by British Communications Corporation the equipment, which will be used by air traffic controllers, will provide as many as 17 channels on a single tape, although the Gatwick installation will use only eight.

8 Million.—During March the number of combined television and sound licences in the U.K. passed the 8 million mark. The month's increase was 95,280, bringing the total to 8,090,003. Sound-only licences totalled 6,556,347, including 333,729 for car radio sets.

Institute of Information Scientists has been formed to promote high standards and establish professional qualifications in scientific information work. Enquiries should be addressed to J. Farradane, Torran, Crofton Road, Orpington, Kent.

Next year's Electrical Engineers' Exhibition, sponsored by the Association of Supervising Electrical Engineers, will take place at Earls Court from March 17th to 21st.

Transistor Convention.—The I.E.E. is organizing an international convention on transistors and associated semi-conductor devices, to be held in London from May 25th to 29th next year.

B.S.R.A.—After serving the British Sound Recording Association as secretary for many years, R. W. Lowden has been elected president in succession to J. F. Doust. The new secretary is D. Winget with S. W. Stevens-Stratten as assistant secretary. G. A. Briggs joins M. J. L. Pulling, A. P. Monson and F. Langford-Smith as vice-presidents.

The British Wireless Dinner Club, founded after the 1914/18 war by Col. L. F. Blandy, who was responsible for wireless communications in the British Expeditionary Force, held its 35th annual dinner on April 25th. It was attended by 120 members. The president and vice-president for this year are Maj.-Gen. Sir Ronald Penney and Brigadier Sir Lionel Harris respectively. Captain F. J. Wylie, R.N., and L. T. Hinton are joint honorary secretaries.

The Mullard Company has made an offer to Oxford University of £50,000, payable over ten years, towards the cost of a new college which would accommodate 400 students, of whom up to half would be scientists, mathematicians or engineers.

I.E.A. Exhibition.—The number of visitors to the Instruments, Electronics and Automation Exhibition (Olympia, April 16th-25th) was 59,600, including 3,300 from overseas. This year's attendance was some 6,500 more than last year.

FROM ABROAD

Reliability.—The 5th National Symposium on Reliability and Quality Control in Electronics will be held in Philadelphia, Pa., U.S.A., from January 12th to 14th. The organizers would welcome contributions from outside the U.S.A. Further information about the Symposium and the procedure for submitting papers can be obtained from R. Brewer, of the G.E.C. Research Laboratories, Wembley, publicity area chairman for the United Kingdom and Western Europe.

U.H.F. Congress.—Proceedings of the international congress on u.h.f. circuits and aerials held in Paris last October are being published by the Société des Radio-électriciens, 10 Avenue P. Larousse, Malakoff (Seine), France. The texts of the 166 papers presented at the Congress will be published in either English or French, according to the language used by the author. The proceedings will cost 5,000 francs if ordered before June 15th, or 9,000 francs afterwards. Abstracts of the papers in both English and French are being issued as a booklet, price 1,000 francs.

Cybernetics.—The International Association for Cybernetics is to publish a quarterly review, *Cybernetica*. The annual subscription for non-members is 300 Belgian francs. The association is organizing a second international congress, which will be held in Namur, Belgium, from September 3rd to 10th. The U.K. representative on the organizing committee is Dr. W. Grey Walter, of the Burden Neurological Institute, Bristol, and the U.S.A. representative is John Diebold.

Magnetic Materials.—America's fourth conference on magnetism and magnetic materials, sponsored by a number of organizations, including the Institute of Radio Engineers and the American Institute of Electrical Engineers, will be held in Philadelphia from November 17th to 20th. Further details are obtainable from C. J. Kriessman, Remington Rand Univac, 1900 W. Allegheny Avenue, Philadelphia, Pa.

Norway, which already has 17 v.h.f./f.m. stations, is planning to double this number in the near future to give a satisfactory broadcasting service to the whole country.

A.R.R.L.—A 12% increase in its membership during 1957 is reported by the Amateur Radio Relay League. Members in the United States and its possessions now total 65,215 with a further 2,151 in Canada.

Personalities

L. H. J. Phillips, B.Sc., sales manager of the Electronics Department of Metropolitan-Vickers, has been appointed assistant commercial manager. An honours graduate of the University of Wales, Mr. Phillips became a college apprentice at Metropolitan-Vickers in 1927. A year later he joined the staff of the research department, where he remained until 1941 when he was appointed assistant superintendent of the Radio Department of the Royal Aircraft Establishment, Farnborough. In 1942 he was transferred to the Ministry of Aircraft Production as Deputy Director of Communications Development. He returned to Metrovick as sales manager of the newly formed radio department in 1945, becoming sales manager of the electronics department the following year He is succeeded as sales manager by **A. G. Barton,** A.M.I.E.E., who received his technical education at the Royal Technical College, Salford, and joined the company as a school apprentice in 1939. From 1943 to 1947 he was in R.E.M.E. with the rank of Captain. He returned to Metropolitan-Vickers in 1947 and has been sales engineer in the Electronics Department since 1955.

Harold Larnder, O.B.E., who was a member of Sir Robert Watson-Watt's radar research team at Bawdsey and has been in Canada since 1957, has been appointed Director of Scientific Intelligence in the Canadian Defence Research Board. Until recently he was director of the R.C.A.F. Directorate of Systems Evaluation. For his contributions to the development of radar, which included after-glow of cathode-ray tube screens, pulse analysis and monitoring and radar countermeasures, he received in 1952 a financial award on the recommendation of the Royal Commission on Awards to Inventors. For some time prior to going to Canada he was superintendent of weapons assessment at the Ministry of Supply's Armament Development Establishment.

A. F. Wilkins, O.B.E., M.Sc.Tech., M.I.E.E., another of Sir Robert Watson-Watt's Bawdsey team, has been granted the Fellowship of the American Institute of Radio Engineers for "his contributions to research, to short-wave direction finding, and to the early development of radar." He, too, received a financial award for his contributions to the development of radar, which included a method of height measurement in single-station radar, IFF apparatus and aircraft aerials for use with IFF and a device for reducing the effect of permanent echoes at CH stations. Mr. Wilkins, who is now a senior principal scientific officer at the D.S.I.R. Radio Research Station, Slough, was for the latter part of the war head of operational research sections of Fighter Command and at Air H.Q., S.E. Asia.

R. H. Cooke, a founder member of the Society of Non-destructive Testing, has been appointed director and general manager of the new company Research and Control Instruments, Ltd., mentioned on page 267. He is a member of the committee of the nucleonics section of the Scientific Instrument Manufacturers' Association.

E. Duncan-Smith, D.Sc., M.I.E.E., M.Brit.I.R.E., former United Nations radio adviser to the Jordan government, has been appointed telecommunications expert to Israel by the United Nations Technical Assistance Administration. He will be especially associated with telecommunications and electronic training at the Technion, Haifa. Dr. Duncan-Smith was at one time at the Admiralty Signal Research Establishment where he served for some six years in the technical secretariat and the Shore Station Division. After resigning from the Royal Naval Scientific Service and before going to Jordan, he was with Air Service Training, Hamble, and International Aeradio, Ltd., organizing radio technical training.

Gordon A. Spencer, A.R.T.C., M.I.E.E., has resigned his appointment as principal scientific officer with the Admiralty Signal and Radar Establishment to join Andec, Ltd., electronic engineers, of Reading, as assistant to the director. Prior to going to A.S.R.E. in 1950 he was production manager for Dawe Instruments, Ltd., which he joined on leaving the R.A.F., in which he served as a technical signals officer.

Hilary F. C. Williams, B.Sc., until recently chief engineer of Racal Engineering, Ltd., of Bracknell, Berkshire, has joined Andec, Ltd., as chief electronics engineer. For nine years prior to joining Racal he was with Cossors as a development engineer. During the war he was engaged on radar work at R.A.E. and was granted on honorary commission in the R.A.F.

A. St. G. Prynne, M.A., A.M.I.E.E., has been appointed commercial manager of Racal Engineering, Ltd. His department covers sales, service, contracts and estimating. It is also announced that **I. H. M. Campbell** has been appointed chief of sales (home and export) and will be responsible for publicity.

John P. Coleman, M.I.E.E., has resigned from the board of Data Recording Instrument Co., which he joined last year, and no longer has any financial interest in the company. He will be devoting himself fully to the activities of the Gresham Transformer group of companies, of which he is a co-founder and chairman.

J. W. Soulsby has been elected chairman of the Radio Officers' Union for the fourth successive year. In 1918, at the age of 18, he joined the Marconi Marine Company as a sea-going operator, and except for a short spell at the company's Newcastle depot has been at sea ever since. He is at present serving as chief radio officer in the British India Steam Navigation Company's *Uganda*.

W. S. Armstrong, elected for a second year as vice-chairman of the Radio Officers' Union, was on the Marconi Company's sea-going staff until 1947 when he was appointed to the permanent staff of the Union's Inspectors and Technical Employees' Section. He is 45.

K. P. Wood, B.Sc., A.M.I.E.E., who joined Cossor Radio & Television, Ltd., in 1956, has been elected to the Board and will assist **J. S. Clark,** the chairman and managing director, on the management side of the company's business. Prior to joining Cossor, he was in charge of the electrical engineering department of the Medway College of Technology, Rochester.

J. S. Wilson, who joined Thorn Electrical Industries, Ltd., in 1946, and became sales manager of the Ferguson Radio and Television Division two years ago, has been appointed to the board of Ferguson Radio Corp., Ltd.

W. Dalziel, production manager of Plessey's electronic and equipment group, has been appointed an executive director of the company. Mr. Dalziel, who is 41, joined Plessey in 1938. **H. Fox Wright,** contracts manager of the company, which he joined in 1937, has also been appointed an executive director.

H. G. Cutler, general manager of Egen Electric, Ltd., has been appointed a director of the company, which he joined as works manager on its formation in 1946. He has been general manager since 1954.

J. Irwin has been appointed works executive director, and **C. C. Hurst** an executive director of Aerialite, Ltd. Mr. Hurst retains his position as sales manager of the aerial and electronics division.

Arthur C. Crouch has joined Reliance Manufacturing Co. (Southwark), Ltd., of Walthamstow, as technical sales executive. He was with A.B. Metal Products until 1951, and rejoined them in 1953. In the interim he was with Ardente.

R. H. Vivian, B.Sc., A.M.I.E.E., for seven years with A. C. Cossor, Ltd., has joined the Trix Electrical Co. as chief engineer.

F. G. Sandham, who has been with the Trix Electrical Co. for the past six years, has been appointed works manager.

William Strange, formerly of Grundig (Great Britain), Ltd., has joined the Wyndsor Recording Co., as production manager. Until recently the company, which manufactures Wyndsor tape recorders, was known as the Magnetic Recording Company.

H. Sellers, formerly sales manager of Marconi Instruments, recently joined Livingston Laboratories as commercial manager.

OBITUARY

S. B. Smith, who retired in 1956 after 44 years' service with Marconi's W.T. Company, has died at the age of 66. After a few years in the company's test department he joined the research department in 1919 and later took a leading part in designing the first Adcock direction finder to be produced commercially. He was also concerned with the development of facsimile equipment. At the time of his retirement Mr. Smith was chief of the company's patents department.

News from the Industry

Associated Transistors, Ltd., is the name of a new company formed jointly by the Automatic Telephone and Electric Co., the English Electric Co., and Ericsson Telephones, for the development and manufacture of transistors and other semi-conductor devices. The company, for which a factory is being built at Ruislip, Middx, will be primarily concerned with the production of switching transistors for telecommunications, but will also manufacture semi-conductor devices of more general application.

Plessey-Brayhead Agreement.—The Plessey Co., Ltd., and Brayhead (Ascot), Ltd., have entered into a joint development and manufacturing agreement covering television tuners and f.m. permeability tuners. The first Plessey-Brayhead products to be marketed under the new arrangement will be the Brayhead BT16 tuner, now to be known as the P-B 1, and the new Plessey f.m. permeability tuner, to be known as the P-B 2. These products will be sold in the United Kingdom by both companies and throughout the rest of the world by Plessey International, Ltd.

John Brennan, Ltd., of Crail, Fife, have entered into an agreement with Griffiths Electronics Inc. and Electronic Industries, Inc., of New Jersey, U.S.A., to produce, initially from imported parts, the Griffiths Golden Grid cathode-ray tube gun for marketing in Great Britain, on the Continent and in the entire sterling area. The guns will be available to tube manufacturers and rebuilders and will also be used in the company's Truvu tube.

A.T. & E.—In his annual report, Sir Thomas Eades, chairman of the Automatic Telephone & Electric Company, stated that the company's output for 1957 was a record and that the group profit increased by £187,824 to £1,981,905. He announced that in December A.T. & E. jointly with Siemens Edison Swan entered into an agreement with the South African Posts and Telegraph Department for the supply of telecommunications equipment over the next 10 years. Among the subsidiary companies mentioned in the report are Hivac, whose turnover is now nearly five times that of the immediate post-war years, and A.T. & E. (Bridgnorth), whose turnover for 1957 increased by 50 per cent compared with 1956.

T.C.C.—In his report for 1957 the chairman of the Telegraph Condenser Co. announced that the group trading profit of £424,301 was a decrease of £35,725 on the previous year, but the major part of this was accounted for by the acquisition of a majority interest in a Canadian company. Since the end of the year T.C.C. have acquired the entire share capital of United Insulator Co., Ltd., the well-known ceramic manufacturers.

Murphy Group net profit for 1957 of £226,829 was some £30,000 more than in 1956.

Telcon Group profit for 1957 (before taxation) was £626,274, an increase of 26% on the previous year.

A New Instrument Company.—Research & Control Instruments, Ltd., of Instrument House, 207, King's Cross Road, London, W.C.1 (Tel.: Terminus 8444), have become the sole distributors in the United Kingdom for the electronic instruments and scientific equipment hitherto marketed by Philips Electrical, Ltd. The company, whose service department and stores are at 49, Temperley Road, Balham, London, S.W.12 (Tel.: Battersea 9166), have also been appointed sole distributors responsible for the sale and servicing in the U.K. of Mullard electronic measuring instruments and electro-chemical apparatus. Research & Control Instruments are also handling electronic instruments made by Elektro-Spezial A.G., of Hamburg, X-ray diffraction and spectrographic equipment of Norelco (U.S.A.) and X-ray equipment manufactured by C. H. F. Müller A.G., of Hamburg.

Kerry's (Ultrasonics), Ltd., of Warton Road, Stratford, London, E.15 (Tel.: Maryland 6611), have been appointed sole U.K. distributors for Mullard low-power ultrasonic tinning, cleaning and machining equipment.

Commercial Stereo Discs.—First release of stereophonic records by the Pye Group are scheduled for sale in June. They will include popular and "classical" items and will be recorded to the 45/45 characteristics which have been agreed upon by the leading record manufacturers. A range of suitable reproducing equipment has been developed by both Pye and Pamphonic, and will be available at the same time.

Atomic Instrumentation.—The joint services of Ekco Electronics, Ltd. (Southend-on-Sea) and George Kent, Ltd. (Luton) are offered for the engineering and manufacture of overall instrumentation schemes for both power and research reactors. Kents have produced the physical instrumentation for various reactors and Ekco the nucleonic control instruments and associated circuitry.

Mullard have set up a semiconductor division with G. A. Gilbert as head. Within the division there is a commercial department, of which P. A. L. Harris is manager and a technical department with G. D. Grimsdell as manager.

Remington Rand, Ltd., have renamed their electronics division the Univac Computer Division, and it has been transferred to 26, Kensington High Street, London, W.8 (Tel.: Western 8241). The division is part of the Business Services Division of which C. W. Elliott is now national sales manager. R. H. Williams is manager of the Univac Division.

Wirepots, Ltd., of New Road, Rainham, Essex (Tel.: Rainham 4143), announce that Richard H. Cramp, previously with Colvern, has joined them as joint managing director with Cyril May. The company, which was originally the North View Engineering Co., is concentrating on the manufacture of wire-wound potentiometers.

U.S.A. Visit.—Alfred Rose, managing director of Direct TV Windings, Ltd., and Direct TV Replacements, Ltd., is to visit the U.S.A. in June. He will be negotiating for the production in this country, under licence, of American television components and test equipment.

Perth Radios, Ltd., of Marten House, 39-47, East Road, London, N.1, have been appointed sole U.K. representatives for the Saja tape recorder made in Western Germany. It will be marketed under the joint Perth-Saja trade mark. The company recently appointed Baker Duthie and Co., of 131, West Regent Street, Glasgow, C.2, as their agents for Scotland and Northern Ireland.

Mullard inform us that they received orders for ultrasonic equipment to the value of £70,000 during the I.E.A. exhibition.

Southern Instruments, Ltd., of Camberley, Surrey, announce that Philip Sellars, who is managing director of a number of industrial concerns, has joined the board of directors as vice-chairman. It is also announced that the company is erecting a new laboratory wing, which will increase the floor space to about 70,000 sq ft.

Nu-Life Teletubes, whose reconditioning work on cathode-ray tubes was described in our May issue (page 247), are having a new factory built at South Ruislip, Middlesex, to cope with increased demands for their services.

Metal Blanks, Ltd., of Tudor Grove, London, E.9 (Tel.: Amherst 8484), the recently formed associates of Gate Electronics of the same address, have facilities for producing printed circuits in large or small quantities.

Gillone Electric, Ltd., component manufacturers, whose factory at Camberley, Surrey, was recently severely damaged by fire, are now back in production. The rebuilding of the factory is well under way and they are going ahead with their plans to build another factory giving an additional 15,000 square feet of floor space.

Welwyn Electrical Laboratories announce that their "V" series of vitreous-enamelled wire-wound resistors have been granted full type approval by the Radio Components Standardization Committee.

An American associate company, G. V. Planer, Inc., has been formed in New York by G. V. Planer, Ltd., of Windmill Road, Sunbury-on-Thames, Middlesex.

Henley's engineering sales department has moved from the company's head office in Hatton Garden to 59-62, High Holborn, London, W.C.1.

EXPORTS

First quarter's exports of British radio equipment of all kinds are estimated to be higher than in any previous quarter. The provisional total announced by the Radio Industry Council is nearly £11.5M. which is about £650,000 more than for the same period last year. The most marked increase was in the export of sound-reproducing equipment, which rose to over £3M.

British component manufacturers are planning to hold an exhibition in Stockholm from September 29th to October 3rd. It is the third Swedish exhibition organized by the Radio and Electronic Component Manufacturers' Federation, the previous two being in 1948 and 1953.

Canada.—An eleven-man delegation from the Dollar Exports Council, headed by Sir William Rootes, has been visiting Canada during the past month. In Canada the Council maintains British Trade Centres in Toronto, Montreal and Vancouver, which are managed for the Council by the Canadian Association of British Manufacturers and Agencies, whose directory ("CABMA Register") is issued jointly by our Publishers and Kelly's Directories.

Servo Test Equipment.—An order worth $121,000 for transfer function analysers for guided missile work has been received from the U.S.A. by the Solartron Electronic Group through its American distributing company Solartron Inc., of Los Angeles, California.

Doppler Navigator.—A Viking aircraft equipped with a Marconi civil Doppler navigator has carried out an extensive demonstration tour of Western Europe.

Sound reproducing equipment for Prince Rainier's new home on the outskirts of Monte Carlo has been installed by Pamphonic Reproducers. The installation includes a.m./f.m. receiver and amplifiers and loudspeakers are fitted in every major room and line source speakers are installed in the garden.

Radio-Telephone Equipment.—A repeat order from the New Zealand Post Office for the supply of multi-channel v.h.f. radio-telephone links has been placed with Marconi's by their agents Amalgamated Wireless (Australasia) Ltd. The order, valued at approximately £90,000, is for terminal equipment, repeaters, aerials and test equipment for four radio links each providing up to 48 telephone channels. All the radio equipment will be in duplicate, the standby gear being automaticaly switched into service should there be a failure. Marconi's are providing similar equipment for a link between Kingston and Montego Bay, Jamaica, for which the channelling equipment is being supplied by the Automatic Telephone and Electric Co.

Radar.—A complete mobile radar installation (Type CR21) has been ordered from Cossor by the Federal German Ministry of Defence.

Switzerland.—The market for industrial electronic equipment was explored by Dr. J. C. Simmonds, managing director of Airmec, Ltd., during a recent visit to Switzerland. He met representatives of the machine tool industry in Zurich and American industrialists in Basle to consider licensing arrangements.

Nigeria.—Ekiti (Anjuwon) Universal Trading Stores, 5a, Strachan Street, Ebute Metta, Nigeria, are interested in receiving catalogues and price lists from U.K. manufacturers of tropicalized domestic short-wave receivers, amplifiers, tape recorders and loudspeakers.

British East Africa.—A survey of the market for domestic receiving equipment in British East Africa, prepared by the U.K. Trade Commissioner in Nairobi, shows that whereas in 1955 the U.K. provided 34% of the imports of sound receivers and radiogramophones the figure for 1956 was 31% and during the first six months of last year it dropped to 30%. During the same period Western Germany supplied 35%, 35% and 31% respectively and the Netherlands 28%, 31% and 33%.

Measuring Instruments.—Wayne Kerr Laboratories, of Chessington, Surrey, will be demonstrating their universal bridge, Type B221, and its various chemical adaptors, showing the application of the Wayne Kerr three-terminal bridge technique applied to chemical measurements, at the ACHEMA Chemical Engineering Exhibition in Frankfurt, Germany, from May 31st to June 8th.

Instruments and equipment from a number of British manufacturers will be exhibited at the International Electronics and Atomic Energy Exhibition in Rome (June 16th to 30th), by Conway Dolman, of Via Sicilia 235, Rome. The company represents among others Plessey, Rank Cintel, Airmec, Furzehill, Nagard, Southern Instruments, Allied Electronics, Wayne Kerr, J. Langham Thompson, Winston Electronics and Emeco Electronics.

Poland.—For the third successive year Kelvin Hughes are exhibiting at the Poznan International Fair (June 8th-22nd). They will be showing marine equipment, industrial instruments and components.

A television link, using travelling-wave tubes both at the terminal stations and at the repeater stations, is to be supplied by Marconi's for the Yugoslav broadcasting authorities. It will link Belgrade and Ljubljana (a distance of some 350 miles). Provision will be made at Sljeme, near Zagreb, for the insertion of programme matter, which could be relayed to Belgrade and Ljubljana simultaneously or to either citv.

Electronic equipment, including spectrum analysers and stabilized decade oscillators, worth £70,000, has been ordered by an Italian organization from Winston Electronics, of Shepperton, Middlesex.

Metal Cabinets.—A. G. Imhof, managing director of Alfred Imhof, Ltd., is touring the U.S.A. and Canada investigating the market for Imlok, the interlocking system of metal cabinet construction.

Italy.—Melchioni S.p.A., Via Friuli 16/18, Milan, are interested in securing the representation for Italy of United Kingdom manufacturers of sound and television components and accessories.

Switzerland.—Sorensen Ard A. G., Eichstrasse 29, Zurich 3/45, are interested in representing a U.K. manufacturer of semi-conductors.

Swiss Importers.—Willy Egli and Co., of Zurich, who are agents for a number of British companies, including Tannoy, T.C.C., Rola-Celestion, Ekco and Multicore, have changed their name to Egli, Fischer and Co. Their address is Gotthardstrasse 6, Zurich.

BRIMAR 6BQ7A

The Brimar 6BQ7A is a double triode consisting of two independent high slope sections with similar characteristics. It contains an internal screen which is brought out of a separate base pin to ensure low interaction between the two independent sections. The valve is particularly useful in all functions where high slope triodes are required and can also be used as a cascode RF amplifier or a combined oscillator and mixer.

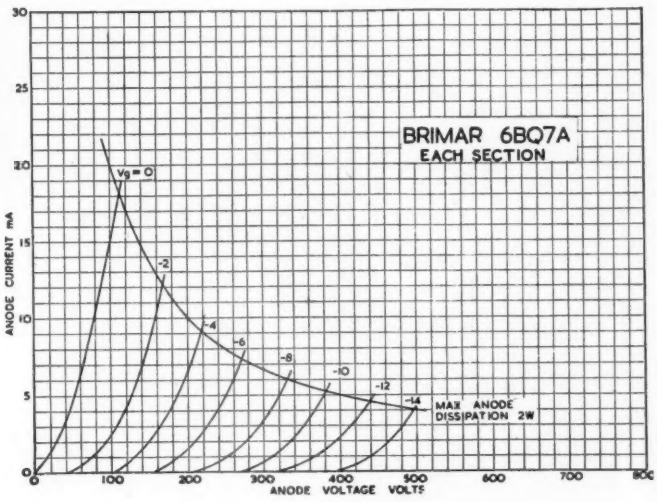

Cut this out for further reference or write to the Publicity Department at Footscray for a data sheet.

Name .....

Address .....

.....

W.W.

TYPICAL CHARACTERISTICS

Heater voltage	6.3 volts
Heater current	0.4 amp.
Anode voltage	150 volts
Cathode bias resistor	220 ohms
Anode current	9 mA
Mutual conductance	6.4 mA/V
Amplification factor	39
Anode resistance	6,100 ohms
Grid cut-off voltage (1—10μA)	—10 volts approx.

Standard Telephones and Cables Limited

Regd. Office: Connaught House, 63, Aldwych, London, W.C.2

FOOTSCRAY · SIDCUP · KENT · *FOOtscray 3333*

All the more discriminating notes insist on being rendered by Acos sound equipment. Type 65 turnover cartridges, for instance, serve music in most well-known makes of gramophone: Type 65-1 hi-fi right up to 12 kc/s (yet with a fairly *forte* output*), Type 65-3 *fortissimo* in output* (but true to the note, for all that.) All, of course, have Acos x500 tested styli in slip-in fittings.

*Outputs: Type 65-1: 0,15 V; Type 65-3: 1,0 V, at 1 cm/sec velocity, 1,000 c/s.

acos ARE DOING THINGS IN STYLI

COSMOCORD LTD WALTHAM CROSS HERTS · TEL: WALTHAM CROSS 5206 (London subscribers please dial WA4 5200)

Components Exhibition

NEW DESIGNS AND METHODS SEEN AT THIS YEAR'S R.E.C.M.F. SHOW

THE exhibition was again held at Grosvenor House and Park Lane House, London, W.1 (from 14th to 18th April) and was no less congested than on previous occasions. Foreign representatives from 29 countries attended as well as the regular battalions of British designers, engineers and technicians from Government departments and industrial firms.

In the report which follows we deal with some of the new products which interested us and which we think will interest those who were unable to be at the exhibition.

Resistors:—Most manufacturers are now supplying their potentiometers with "spikes" and brackets for printed circuit applications. The Painton "Flatpot," which is designed also for easy stacking, is a minute ($1\frac{1}{4}$in × $\frac{5}{8}$in × $\frac{7}{32}$in overall) preset wire-wound potentiometer with a range of values between 10Ω and 10kΩ. A lead screw, provided with a screwdriver slot, carries the slider along the wire-wound rod and disengages the drive at the end of travel. Two other Painton developments are a new low noise self-cleaning brush gear for professional faders for which a 900:1 reduction in maintenance is claimed, and a potentiometer with an accuracy of linearity of 0·1 per cent without using a cam-corrected wiper. This accuracy is obtained by "potting" all of the winding except the contact surface.

Ardente were exhibiting two new miniature potentiometers as well as the now well-known "hearing-aid" type. One is virtually a scaled-down version of the ordinary volume control and the other is possibly the smallest sliding contact potentiometer with on-off switch at present available in a wide range of values. Known as the Type VC1226 it is only $1\frac{3}{32}$in long overall and it weighs only 0.02oz. The resistance range covers values from 5kΩ to 3MΩ; with a normal tolerance of ±30%. The switch contacts are sub-miniature versions of relay contacts and operate with a wiping action, being actuated by a cam on the wiper carriage. The insulation resistance between the potentiometer and the switch in the "on" position is 100MΩ at 100V d.c.

The edge control potentiometer seems to be a popular solution to the mounting problems caused by the multiplicity of preset and main controls on the modern television receiver. Egen, for instance, group twelve of their Type 293 controls mounted in a panel space 7in × $1\frac{1}{2}$in. Another preset potentiometer by Egen, available in carbon or wire-wound versions, has a replaceable track to reduce costs and ease servicing problems; however, this is of a more conventional form. A.B. Metal Products also had edge control potentiometers on view, and a concentric preset type.

Morganite are producing ganged volume controls, matched for stereophonic use. The matching process employed involves balancing on voltage measurements and the potentiometer is claimed to give outputs within $1\frac{1}{2}$dB of each other.

Ordinary fixed resistor developments are, in the main, confined to extensions of ranges (Dubilier, for instance, now produce their Grade 2 range in values between 10Ω and 22MΩ), and modifications for printed circuit use. The conventional wire-ended resistor has several disadvantages when employed on a printed circuit board, including the difficulty of ensuring correct operation of bandolier feed assembly equipment and fire risk due to the body of the resistor being in close contact with the board. Erie have introduced a new range of resistors with rigid metal tags at right-angles to the main axis of the body, so making insertion less difficult. "Shoulders" on the tags, which are shaped to retain the resistor in position for dip soldering, prevent the element itself contacting the panel, thus reducing the fire risk.

Special-purpose resistors were prominent at the exhibition. Metallic film and oxide film resistors were shown by, among other manufacturers, Plessey and Welwyn. The Plessey, "Metallux" resistor consists of a nickel-chromium alloy film on a cylindrical ceramic former. The self-inductance is very low, and noise levels compare favourably with wire-wound components. Possibly the most interesting feature of these resistors is that, under pulse conditions with a suitable duty cycle, large overloads can be tolerated. The Welwyn resistor has the oxide film coated on to a ceramic body with silvered end-contacts. Another pointer from Welwyn is that it is possible to obtain greater stability over a wider range

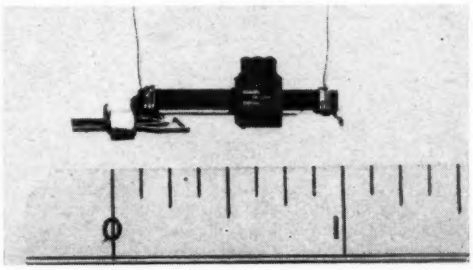

Ardente sub-miniature sliding-contact potentiometer with switch. (Scale in inches.)

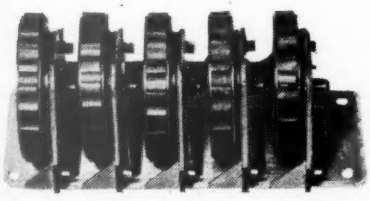

A.B. Metal Products edge control potentiometer assembly.



Painton "Flatpot" miniature wire-wound potentiometer (actual size).

of values than with the previous pan-climatic coating by using Melinex to coat the ordinary high stability resistor.

Morganite exhibited "Morganohm" non-linear resistors made from silicon carbide and clay. These ranged from G.P.O.-approved types, similar in appearance to a ceramic disc capacitor, for protection of low voltage switch and relay contacts to large ½in thick discs designed to fit into 15-A power sockets in lightning-prone areas, and long "pencil" types for TV e.h.t. stabilization. The laws vary between $I \propto V^4$ for a small disc type unit up to $I \propto V^9$ for a 21-kV e.h.t. stabilizer.

Manufacturers*: A.B. Metal Products (W, F, V); Ardente (V); British Electric Resistance Co. (W, V); Bulgin (W, V); Colvern (V); Dubilier (C, HS, W, V); Egen (V); Electronic Components (W); Electrothermal (C, HS, W, F); Erie (H, S, W); Morganite (C, V); N.S.F. (V); Painton (HS, W, V); Plessey (W, V); Reliance (V); Salford (W); Technograph (F); Welwyn (C, HS, W); Zenith (W, V).
***Abbreviations:** C, composition; HS, high stability; W, wire-wound; V, variable (wire-wound or composition); F, flexible.

Capacitors: — Although most manufacturers have produced small tuning capacitors for transistor receivers probably the smallest on show was the Type C.V.1 on the Ardente stand. This twin-gang capacitor is only about 1in × 1in × 0.6in overall, yet it provides a maximum capacitance of 250pF approximately. Tracking is accomplished by shaping the vanes appropriately and the overall law is designed to widen the tuning over the band occupied by B.B.C. medium-wave stations. The interplate insulation —this is a solid-dielectric capacitor —is p.t.f.e. or polystyrene. Ball bearings are used and the capacitor is mounted in a dust-proof cover.

Jackson Brothers were exhibiting a miniature three-gang capacitor of more conventional construction, which incorporates an epicyclic slow-motion drive. Capacities on this item are r.f. and aerial, 208pF; oscillator, 176pF. It is only slightly larger than their "OO" ganged capacitor.

Whilst in principle not new, a tuning capacitor incorporating a double-pole switch (Plessey) should be mentioned. This two-gang capacitor has a pair of contacts mounted so that, when fully open, the rotor short circuits these to earth. Plessey suggest that this component may be used to switch in preset tuning for the long-wave Light Programme, avoiding the extra complication, size, weight, losses and expense associated with a separate wave-change switch and coils.

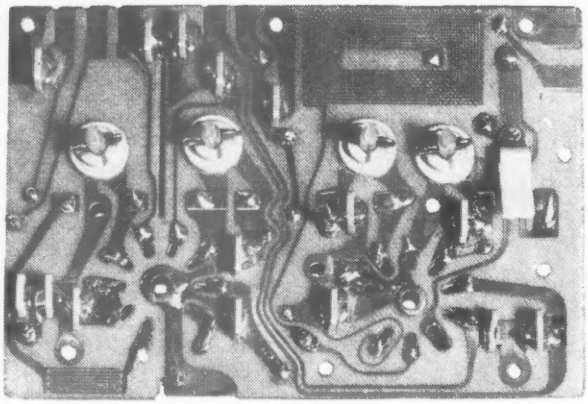

"Chassis" of Cyldon printed circuit TV tuner.

The London Electrical Manufacturing Company's ceramic trimmer for printed wiring consists of a small ceramic tube carrying tags for vertical or horizontal mounting. Part of the exterior of the tube is silvered and forms one "plate," the other being an 8 B.A. brass screw, passing into the centre of the tube. The ceramic material can be chosen to give a compensating temperature coefficient and the trimmer is available in capacities up to 10pF. Mullard announce that they have adapted their popular "beehive" trimmer for printed circuit use.

In the realm of fixed capacitors evidence of development was rather sparse but where it had taken place the results were startling. For instance L.E.M. have produced extremely small 50V-working silvered mica capacitors for transistor applications (Type SM701). Values between 10pF and 500pF are only seven millimetres long and one millimetre in diameter.

It might be thought that glass capacitors are the beginning of a regression to the days of teak and brass terminals. This is not so; L.E.M. have also produced a range of capacitors encapsulated in glass for high ambient temperature applications. They are claimed to perform satisfactorily at 250°C.

A. H. Hunt were exhibiting a range of electrolytic capacitors of values from 75μF at 3V to 0.25μF at 25V in two sizes $\frac{1}{4}$in × $\frac{1}{4}$in and $\frac{1}{16}$in × $\frac{3}{16}$in using plain or etched foil. They also had on show double (i.e. $10^2 + 10^2$pF) ceramic discs and "wedge" ceramic decoupling units. These latter were also shown by L.E.M. who have developed a finish for ceramic disc capacitors which acts as a flux—instead of the more usual deterrent action of the coating —for soldering!

Other modifications of existing types were shown by Suflex. These included the use of a Neoprene disc on the wires of single-ended capacitors to keep the wire spacing constant and tinned bronze wire terminations on physically small capacitors. Both modifications ease considerably the insertion by automatic methods of these components into a printed wiring board.

A 0.25μF spark discharge capacitor with self inductance of only 0.1μH was shown by Wego, who were also exhibiting a 50μF 75V capacitor only 3in × 3in × 1½in with an insulation resistance better than 200MΩ. This used Melinex film as a dielectric.

The T.C.C. stand featured the "Superlytic" high quality low leakage electrolytic capacitors which are now in full production. Another T.C.C. capacitor of note is the small metallized polystyrene type. The excellent electrical characteristics of this form of construction renders it ideal for use at r.f. in tuned filters, etc.

Manufacturers*: B.I.C.C. (H, P); Sidney Bird (T); Bulgin (T); Daly (E); Dubilier (C, E, F, H, M, P, T); Erie (C, F, H, T, V); Hunt (C, E, F, H, M, P); Jackson (T, V); L.E.M (C, H, M, P); Mullard (T, V); Mycalex (M); Plessey (A, C, E, F, P, T, V); Stability Capacitors (C, M); Static Condenser (P); Stratton (V); S.T.C. (E, H, M, P); Suflex (F); T.C.C. (A, C, E, F, H, M, P, T); T.M.C. (A, C, F, H, M, P); Walter (T); Wego (F, H, M, P); Welwyn (C); Wingrove and Rogers (T, V).
***Abbreviations:** A, air dielectric; C, ceramic or glass; E, electrolytic; F, plastic film (polystyrene, etc.); H, high voltage; M, mica; P, paper, T, trimmer; V, variable (tuning, etc.).

Coils and Transformers:—The latest i.f. transformers produced by Weymouth are notable for their extremely

small size (½in square by 1 5/8in high). Available for i.fs. of 470kc/s, 1.6Mc/s and 10Mc/s, they have Q values (at 470kc/s) of nominally 100, and up to 150 can be obtained in special versions. The 470-kc/s types have bandwidths of 7.5kc/s at the −3dB points. A 38Mc/s ratio detector transformer for use in combined f.m. and t.v. receivers was shown by Sidney Bird (Cyldon). An a.m. suppression/ratio of 30dB in the centre of the band has been achieved.

Q values up to 105 at frequencies from 12 to 36Mc/s have been reached in a range of miniature r.f. coils wound on low-loss ceramic formers shown by Plessey.

A number of miniature components for computers were shown by Oliver Pell. These included toroidal chokes and transformers, C-core transformers, and relays (for punched card applications).

New ranges of transformers shown by Gresham include some especially designed for maximum heat conduction, a miniature range suitable for use with transistors, and another for high-quality audio amplifiers.

A new range of high-power audio output transformers, the P6000 series, was shown by Partridge. The power ratings are 100 watts at 35c/s or 60 watts at 25c/s for less than 1% total harmonic distortion.

Manufacturers: *A.f. and mains transformers and chokes:*—Richard Allan; Ardente, Associated Electronic Engineers; British Electric Resistance Co.; Electro Acoustic Industries; English Electric; Ferranti; Fortiphone; Goodmans; Gresham; Haddon; Hinchley; Oliver Pell; Parmeko; Partridge; Plessey; Power Controls; Reproducers and Amplifiers; Rola Celestion; Standard Telephones and Cables; Weymouth; Whiteley; Woden; Zenith. *I.f. and r.f. transformers and chokes:*—Plessey; Standard Telephones and Cables; Stratton; Weymouth; Wireless Telephone Co.

Television Components:—The provision of v.h.f. sound facilities on a television receiver does not add an appreciable amount to the cost because modifications to only two sections of the receiver—the tuner and sound detector—are required. Opinion seems to be divided on the best method of providing f.m. facilities in the tuner—for instance A.B. Metal Products have modified their "Fireball" tuner (announced at last year's show) to include three v.h.f. positions on the switch in addition to 14 TV channels (one u.h.f.). This method is also adopted by N.S.F. on their incremental-inductance tuner. The Plessey-Brayhead BT16 tuner provides a choice of this system or one f.m. switch position with continuous tuning over the f.m. band by the fine tuner.

An interesting tuner development was shown by Sidney Bird (Cyldon). Their tuner uses a printed circuit, as distinct from printed wiring. The coil circuits too are printed and these have no pre-set tuning adjustments. The fine tuning control is a small metal plate which is bent towards a single turn printed on the main board, in series with the oscillator coil at the "hot" end. This provides both a capacitive and an eddy current effect. On a low frequency channel the major part of the control is capacitive, tending to reduce the oscillator frequency as the plate approaches the board, but as the frequency is raised the eddy current effect (raising the oscillator frequency) exerts an increasing influence. By balancing carefully the two effects the fine tuning range is constant at 2.5Mc/s on each channel. For the f.m. function the coil circuit is provided with a large oscillator coil stud which shorts out a small capacitor in series with the fine tuner, extending the range to 7Mc/s.

The broad outline of the circuit follows normal lines, but many small refinements are incorporated—i.e. "low noise" a.g.c. feed resistor; screen compensation of the mixer to improve Band III performance; eddy current-tuned i.f. output coil; new low-inductance valveholders; a special board material with good high-frequency characteristics and "wedge" decoupling capacitors, designed to be pressed into slots in the wiring board. The valves used (PCC84 and PCF84) were both specifically designed for a printed circuit layout.

110° scanning coils made their appearance at this year's show. Elac were exhibiting a scanning yoke and Plessey were showing a complete set of components—yoke, line and frame output transformers. The Plessey line scan components require only 17W of h.t. power to give full scanning at 16kV e.h.t. and Elac claim less than 2% barrel and pincushion distortion for their yoke.

Manufacturers*: A.B. Metal Products (T); Sidney Bird (T); Brayhead Products (T); Ekco Plastics (M); Electro Acoustic Industries (D, F); Goodmans Industries (F); Long and Hambly (M); James Neill (F); Plessey (D, ST, F, W, T); Thermoplastics, Ltd. (M); Whiteley Electrical Radio (D, ST, F, W).

***Abbreviations:** D, deflection coils; F, focus, ion trap and picture shift magnets; M, masks; ST, scan transformers; T, tuners (v.h.f. heads); W, width and linearity controls.



Plessey 110° scan-coil assembly. The frame coil is of the toroidal type and the two small bar magnets above and below the coils correct for pincushion distortion.

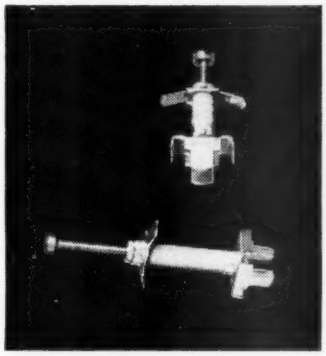

London Electrical Manufacturing Company's ceramic miniature trimmers for printed circuit use (about actual size).

Weymouth miniature i.f. transformer.



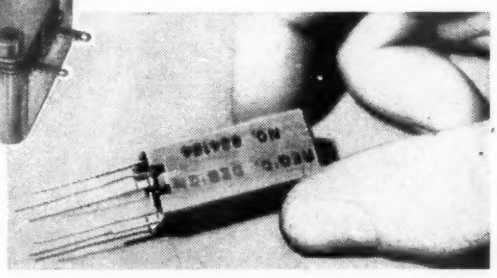

Above: Ardente sub-miniature two-gang tuning capacitor (actual size.)

Aerials and Accessories.—J-Beam were showing (from their Sky-Beam division) a set of aerials for use in the 460 to 480Mc/s mobile communications band, including end-fed dipoles for main and mobile stations and a double stacked slot directional array with a claimed gain of 14.5dB over a reference dipole. This is designed for sector coverage i.e., "looking" up a valley, or along an inhabited strip of coastline.

Television aerials, as at last year's exhibition, seem to be static as far as electrical design is concerned. Wolsey have adopted a wing-nut element clamp which enables them to supply their aerials in a pre-assembled but "collapsed" state. Antiference were showing a new loft aerial for Bands I and III. This consists of a low frequency "V" dipole with telescopic elements and a Band III Yagi-type array. One of the "V" elements can be rotated, making possible the use of the combined aerial in locations where the B.B.C. and I.T.A. transmitters are not co-sited.

J-Beam—well known for their end-fed and skeleton slot aerials—are producing a new range of "conventional" types—one of these, the "Twinbeam" was on show. This is a Band I "H" with a Band III Yagi-type array attached which can be rotated, carrying the Band III reflector with it.

Among the new aerial accessories shown were the "Belling-Lee" range of diplexers and a triplexer all of which use printed circuit construction, the TV diplexers (including a waterproof type for outside use) passing Band II signals through the Band I section. One diplexer (L1360) combines or separates television and f.m. signals.

A cable-to-mast strap was shown by Permanoid. This is a tough Nylon strap, saw-toothed on the inside surface. One end carries a moulding to hold the cable and a slot through which the toothed section is passed, so locking the strap and cable to the mast.

Manufacturers*: Antiference (TA, AS); Belling and Lee (TS, AS, D); Egen (AS); J-Beam (TA, CA); K.L.G. Sparking Plugs (TA); Permanoid (Arrell) (TA, AS); Wolsey (TA, AS, D).
***Abbreviations:** TA, domestic aerials; CA, communications aerials; AS, accessories; D, distribution amplifiers and equipment.

Switches.—Flexibility of switching arrangements is a feature of a miniature rotary switch by Ardente which measures only $\frac{3}{4}$in across. It is available with up to 4 banks and up to 6-way operation. The spacing between banks can be varied for ease of wiring, and screening plates can be fitted. Wave changing in receivers is one possible application.

The probable trend away from mains switches on volume controls (because of hum trouble) was reflected in a push-button mains switch for separate use displayed by Egen. Its operating stroke is $\frac{7}{16}$in and the shaft can be supplied in any length. Also intended for mains operation, a new N.S.F. rotary switch is basically a wafer type but with a special contact system for high currents up to 5 amps (or 10 amps at 30V d.c.). The rotor contacts are coil-spring loaded and have V-shaped ends. This firm has introduced a new type of locating mechanism for rotary switches which gives extremely positive action. It uses a fixed spring-loaded ball and a rotary corrugated plate. N.S.F. also showed an example of dual concentric spindles for rotary switches, making possible two independent switches in one assembly.

Key switches of unusual design by Henry and Thomas are notable for the low capacitance of less than 2·5pF between the gold-plated contacts (5pF between contacts and frame). Foolproof operation is obtained by providing two parallel paths for each circuit, and there is sealing (to 1·36 atmospheres) between the lever and the body.

Manufacturers*: A.B. Metal Products (K, T, P, R, SL); Ardente (R); B.E.R.C.O. (R, ST); Bulgin (K, T, M, P, R, SL, ST, TH); Diamond H (T, R); Egen (P, R); Henry and Thomas (K, T); Magnetic Devices (P); N.S.F. (K, T, P, R, SL); Painton (T, P, R, ST); Plessey (K, T, P, R, SL); Siemens Edison Swan (TH); S.T.C. (TH); T.M.C. (K, T); Walter (T, P, R, SL, ST); Whiteley (K, P, R, SL, ST).
***Abbreviations:** K, Key; T, lever or toggle; M, micro; P, push-button; R, rotary; SL, slide; ST, stud; TH, thermal delay.

Relays.—High-speed operation and long-life are the main features of an unusual relay shown by Plessey in which the contacts consist of two magnetic reeds sealed inside a glass tube. The reeds are brought together by a solenoid, surrounding the glass tube, which applies a longitudinal magnetic field so that the two reed ends at the 0·005—0·01in contact gap become mutually attracting N and S poles. Several of the sealed tubes (which normally contain dry air but can be evacuated or filled with inert gas) can be inserted in a common operating coil. The "make" time is 0·8 millisecond and the release time better than 0·5 milli-

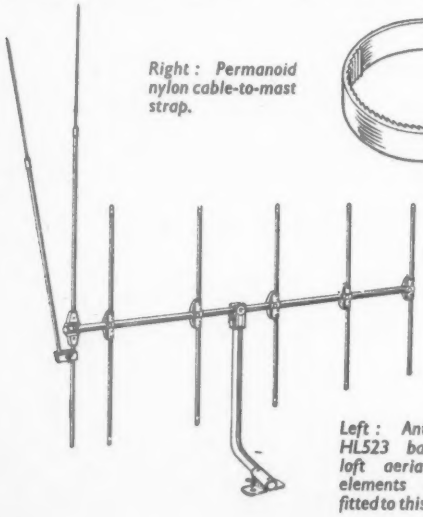

Left: Antiference HL523 band I/III loft aerial (f.m. elements can be fitted to this aerial).



Right: Permanoid nylon cable-to-mast strap.



Right: "Belling-Lee" printed circuit TV/f.m. diplexer. The fixed tuning capacitors are concealed by the printed circuit board.

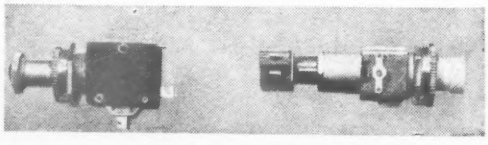

Bulgin switches incorporating signal lamps.

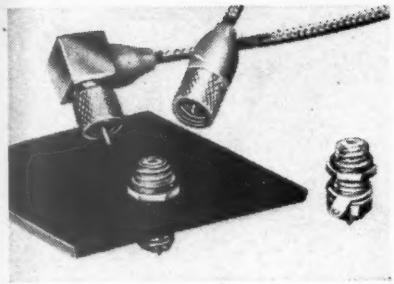

Belling and Lee miniature plugs and sockets.

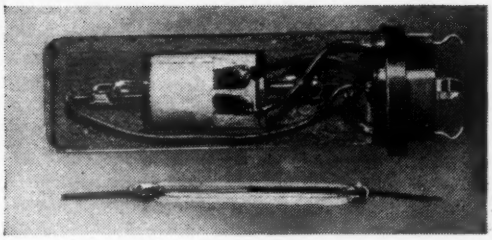

Plessey sealed reed relay (with reed tube below).

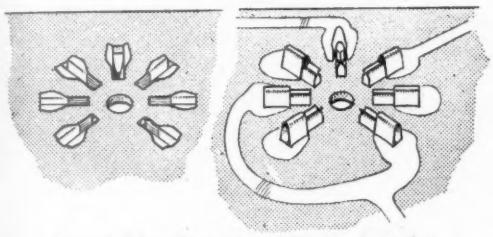

Siemens Edison Swan printed-circuit valve sockets.

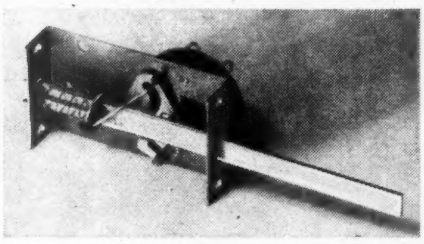

Egen push-button mains switch.

second. The normal "make" action can be changed to a "break" action by means of a biasing permanent magnet, while changeover actions can be achieved from pairs of reed tubes suitably biased and simultaneously energized.

Manufacturers: Diamond H; Electro Methods; Magnetic Devices; N.S.F.; Oliver Pell; Plessey, S.T.C.; Thorn, T.M.C.

Chassis Fittings.—Valveholders for printed circuits can now be dispensed with altogether as a result of a new development by Siemens Edison Swan. This is a valve-pin socket which locks directly into a hole cut in the printed circuit board (see sketch). It can be dip-soldered without affecting the contact area of the socket, and mechanical strain imposed by valve insertion and withdrawal is confined to the locked portion and not transferred to the soldered joint. The socket, which is made of beryllium copper alloy and silver-plated, can be used in other configurations besides valveholders—wherever it is necessary to insert small pins, plugs or component wire ends, in fact.

Another recently introduced connecting device was a subminiature coaxial plug and socket shown by Belling and Lee. The plug is less than ¼in in diameter and is suitable for 50-Ω subminiature coaxial cable. It is retained in position by a knurled nut which screws on to the socket in the printed-circuit board. P.T.F.E. insulation is used and all contact surfaces (which are naturally small) are gold-plated for low-resistance connection.

Widney Dorlec have greatly simplified their prefabricated cabinet design by a system in which the 12 screws originally required for each corner assembly are replaced by 3 bolts. The heads of the bolts are held in channels now incorporated in the main frame sections, and these channels also serve as a convenient means of attaching internal fittings like brackets and hinges.

Holders for two of the latest "glassware" bases were noted. Siemens Edison Swan had a B8F valveholder for transmitting valves, with air spacing to permit forced air cooling of the valve envelope and an incorporated by-pass capacitor between screen grid and earth. McMurdo were showing a B8H holder for the new 110° television c.r. tubes. This is like an octal base but with a somewhat larger spigot hole.

Combined switches and signal lamps were seen on the Bulgin stand—the lamps being incorporated in the press buttons. One type has a push-pull action. Another is actually an operating mechanism and lamp which can be coupled to existing Bulgin switches, and is available for either momentary contact or locking action.

Stratton were showing a new Eddystone tuning capacitor drive and dial assembly which is notable for its smooth action. It has a 110:1 reduction drive using double anti-backlash gears, operating a 500-division logging scale and blank scales for user calibration. The dial measures about 7in × 3in.

Manufacturers*: Antiference (CPS); Bakelite (P); Belling and Lee (CPS, T, F, J, V); B.E.R.C.O. (DL, K); Brayhead (EFC); Bulgin (V, EFC, CPS, DL, ES, T, F, J, K); Carr Fastener (EFC, CPS, T, F, V); H. Clarke (T); Colvern (RPS); Cosmocord (K); Creators (EFC, G, T); Egen (CPS); Electro Methods (CPS, T); Electronic Components (CPS, DL); Fortiphone (CPS); Goodmans (CR); Hallam, Sleigh and Cheston (CR); Harwin (EFC, CPS, T); Hasset and Harper (CR, EFC, ES); Hellermann (EFC, G, T, K); Imhof (CR); Insulating Components (DL, P, T, V); Jackson (DL, DR); K.L.G. (T); Long and Hambly (G); Lustraphone (EFC); McMurdo (V, CPS); Mica and Micanite (EFC, T, V); Morganite (CPS); Mullard (CR); N.S.F. (CPS); Painton (CPS, DL, T, K); Permanoid (CPS); Plessey (CR, CPS, DR, T, P, F, K, V); Power Controls (CPS, T); Salter (EFC); Siemens Edison Swan (CPS, T, V); Simmonds (EFC); Spear (EFC, CPS); Standard Insulator (EFC, G); Stocko (EFC, T); Stratton (CR, CPS, DL, DR, K); Suflex (ES); T.C.C. (P); Telcon (CPS); Thermo-Plastics (CR, DL, ES, T); Thorn (P); T.M.C. (J); Tucker (EFC, G); Tufnol (T); Walter (P); Weymouth (DL, T, K); Whiteley (CR, CPS, T, K, V); Wimbledon (CR, EFC, DL, ES); Wingrove and Rogers (DR, T); Wolsey (CPS).

***Abbreviations:** CPS, connectors, plugs and sockets; CR, cabinets, racks and chassis; DL, dials; DR, drives; EFC, eyelets, fasteners and clips; ES, escutcheons; F, fuseholders; G, grommets; J, jacks; K, knobs; P, printed circuits; T, terminals and tagboards; V, valveholders.

Glassware.—An interesting numerical indicator tube of the glow-discharge type made by S.T.C. has 10 wire cathodes shaped to form the numerals 0-9 and a common anode consisting of two wire meshes at top and bottom. Each cathode is brought out to a particular pin on the duodecal base, and a striking voltage

(200V) applied to the pin produces a glow discharge around the shaped wire inside the tube.

A range of corona voltage stabilizers made by the M-O Valve Company covers voltages from 350V to 2000V. These tubes are particularly suitable for high-voltage low-current supplies for Geiger counters, photomultipliers and cathode-ray devices. The stabilized voltage in most of the types is constant to within ±0.25% for ±10% changes in tube current at 250μA. Striking voltages are about 50V higher than operating voltages. M-O also displayed a new low-noise triode for v.h.f. operation, the VX3519. It has a noise factor of only 1.4dB at 45Mc/s.

Peak currents as high as 33 amps can be passed by a new radar transmitting diode shown by Siemens Edison Swan. Designed to work up to 25kV p.i.v., it features the unusual construction of twelve diode units, with their anodes commoned, arranged in a circle inside the envelope. This firm also had a new 14-inch rectangular c.r. tube, the CME1402, with 90° deflection angle and electrostatic focusing.

Manufacturers*: Cathodeon (Q); Ferranti (CC, IT, M, R, T); M-O (CC, IT, M, PC, R, T); Mullard (CC, IT, M, PC, R, T); Salford (Q); Siemens Edison Swan (CC, IT, PC, R, T); S.T.C. (CC, IT, M, Q, R, R).

***Abbreviations:** CC, cold cathode; IT, industrial and transmitting; M, microwave; PC, photocells; Q, quartz crystals; R, receiving; T, cathode-ray tubes.

Semiconductors. — Many new transistors made their appearance this year, and outstanding amongst them were silicon types capable of working at temperatures up to 150°C. Mullard had three p-n-p alloyed junction types. The OC200 a.f. transistor is similar to the well-known OC71 germanium type, with a typical current gain of 20. The OC201 h.f. type has a cut-off frequency of greater than 2Mc/s and a current gain of 30, while the OC202 has the high current gain of 50 and a cut-off frequency greater than 4Mc/s. All three are notable for their low bottoming point, permitting operation from voltages as small as 1.2V, and their low collector-base leakage current of only 10mμA.

Texas Instruments, exhibiting for the first time, displayed a whole range of n-p-n grown junction silicon transistors. Some of these were medium-power types (4 watts collector dissipation) suitable for audio or servo amplifiers. Higher power types will provide an output of 15 watts at 100°C in Class-B push-pull circuits, while a grown-diffused tetrode can be used in r.f. and i.f. amplifiers at frequencies up to 30Mc/s.

Silicon power rectifiers with diffused junctions are produced by both Texas and Ferranti. As an example of the capabilities of these devices, Ferranti showed an aircraft rectifier containing 36 of their ZR32 diodes arranged in a 6-phase half-wave circuit which delivers up to 1000 amps in a volume of only about 9in × 6in × 6in.

Amongst new germanium transistors Siemens Edison Swan and S.T.C. were showing symmetrical types intended for switching applications. In these the collector and emitter are interchangeable in function and have identical characteristics. S.T.C. also had a new range of audio and low-frequency transistors, while G.E.C. displayed some medium-power types (600mW dissipation) with cut-off frequencies of 750-950kc/s. Incidentally, the G.E.C. type GET6 is now outstanding for its very low noise factor of 3dB at 1kc/s. Last and definitely least—in size—are the Mullard OC57, OC58 and OC59 transistors. These are intended for hearing aids and measure only 0.16in long by 0.12in in diameter. They have current gains of 50, 70 and 100 respectively.

Manufacturers*: Ferranti (D); G.E.C. (D, TR); M-O (D, TR); Mullard (D, TR, TH); Newmarket (TR); Salford (D, MR); Siemens Edison Swan (D, TR); S.T.C. (D, MR, TR, TH); Texas (D, TR); Thorn (TR); Westinghouse (D, MR).

***Abbreviations:** D, diodes; MR, metal rectifiers; TH, thermistors; TR, transistors.

Materials:—Some interesting trends in new uses and improvements of existing materials were seen. For instance the Technograph stand featured developments in the many aspects of printed wiring and circuits. One of these was the roller coating of circuit plate with solder, prior to the insertion of components. This coating—only 5.10^{-4}in thick—helps to eliminate dry joints. Another item on this stand was a printed thermocouple panel on a Terylene sheet base. This can be placed in intimate contact with a surface under investigation, or stacked easily to make a thermopile. Parts of the new Avo Multi-minor were also shown. These use printed cupronickel shunts with small "trimming" bars which are cut, during calibration of the meter, to give the correct resistance.

Aero Research were showing a new hardener for use with Araldite "F" resin. This extends considerably the temperature at which the electrical and mechanical properties of the resin are retained, being satisfactory up to about 250°C.

The base of the modern all-glass valve has to conform to rigid dimensional tolerances. Sintered glass preforms (Mansol (Great Britain), Ltd.) provide a means of satisfying these requirements. The glass is crushed to a fine powder, mixed with a binder and pressed to the shape required. After baking at a low temperature to set the binder the preform is strong enough to withstand normal handling. When the valve or assembly has been fitted to the base, the whole is fired at a temperature sufficient just to fuse the glass. Bases produced in this way have great dimensional accuracy and a high resistance to thermal shock.

The purity of a magnetic alloy is one of the factors limiting its performance. By melting the constituents in a vacuum contamination from atmospheric sources is prevented. A vacuum-melted alloy—Supermendur—was shown by the Telegraph Construction and Maintenance Company. Supermendur gives a μmax value about ten times that for Permendur, and it has the high Curie point of 880°C, making it useful as a magnetic alloy at temperatures up to about 800°C.

James Neill exhibited resin-bonded magnets. These use, as far as is possible, mass-produced, highly efficient cast magnets to which magnetically soft pole pieces are attached with an Araldite bonding resin, so overcoming the difficulties associated with producing and magnetizing complex shapes in the magnetic material itself. Shear strengths up to two tons/in^2 are claimed for this bonding process.

Swift, Levick have succeeded in producing large sections of Columax. They quoted the example of a magnet for nuclear resonance experiments; the system consisted of two sets of four quadrant segments of Columax forming magnetic discs 14in in diameter by 1½in thick. This magnet produces a field ten inches in diameter in a 1.38in gap with a uniformity of field better than one part in 10^5.

Manufacturers*: Aero Research (IM); Anglo American Vulcanized Fibre (IM); Bakelite (IM); Geo. Bray (CE); B. I. Callender's (C, S, W); Clarke (IM, IS, PC); Connollys (C, IM, W); Cosmocord (IM); Creafors (IM); Darwins (M); Duratube (CW); Ekco (IM); Enanlon (IM); English Electric (L); Enthoven (S); Ferranti (F); Fine Wires (W); Formica (IM); Fortiphone (C); Hellermann (IM, PC, RP); Henley's (C, IM, W); Insulating Components and Materials (IM, PC); K.L.G. Sparking Plugs (IM); Langley London (IM); Linton and Hurst (L); Lion Electronic Developments (IM); London Electric Wire and Smiths (W); Long and

"BELLING-LEE" NOTES

WE always assume that regular readers of the *Wireless World* are already aware of the matters about which we write in this page, but sometimes something we know, when presented from a fresh angle, is better understood and always remembered in future.

This time we intend to say something about that much abused term "Primary service area". We will not predict precisely which type of aerial will be required in a given spot, but we do hope to guide one's choice, and to indicate just how one should think in these matters.

The effect of hills and valleys

It must be remembered that ground heights—hills and valleys—are very important in assessing the possibility of or quality of television reception. If you are within the officially published service area, on the side of a hill facing the transmitter and without a higher hill close to you, between you and the transmitter, then it is likely that you will receive a good picture without an elaborate aerial, but if you are on the wrong side of the hill, that is backing on to the transmitter, or at the bottom of the hill with all of it between you and the transmitter, then you will probably have to use quite an elaborate aerial to get a picture of entertainment value.

Always expect difficulties in river valleys unless the transmitter is looking right up them.

Primary service area

A primary service area is often described as "where most receivers, unless they are situated in particularly unfavourable positions, should receive a consistently satisfactory service."

We contend that viewers on the wrong side of hills, or in valleys, are particularly unfavourably situated, and to receive a picture of entertainment value in such locations generally means a more elaborate aerial, costing more to erect.

"Fringe" areas

"Fringe" areas are generally considered to be those where the signal is weak due to considerable distance from the transmitter. It is much safer to consider that a "fringe" area is one where the signal is weak for any reason and because of the weakness, high gain aerials are necessary.

We have a very good example of this near London, at Hampstead, which is the highest part of London and about eleven miles from the Crystal Palace transmitter. On top of the hill, the I.T.A. picture comes in strongly with a simple, one-rod aerial—a dipole or with a "Golden V" set-top aerial, but just over the hill to the north within half-a-mile, elaborate arrays, even double-6, are necessary.

A map can be useful

In our opinion, one of the most useful things to have in connection with the erection of aerials, is a map with coloured contours. Unfortunately the Ordnance 1in. to the mile series does not usually show contours in colours; they are, of course, drawn, but they are more difficult to read. Bartholomews have a ½in. to the mile with coloured (or layered) contours.

A map with coloured contours, shows at a glance where the hills and valleys are.

Try to remember that there is quite a similarity between light and very high frequency waves such as you hope to receive from I.T.A. at Chillerton Down. Imagine the transmitter as a lighthouse. If your location is at the bottom of a hill or steep slope facing away from the transmitter (or lighthouse) there would be a shadow, whilst the opposite side of the valley, or any hillside facing the transmitter would be floodlit. In a "floodlit" situation within the primary service area, reception should be easy, in shadow areas difficult, calling for aerials like a double-6 or even a double-9.

A large number of towns and villages tucked away in the valleys of rivers, in the shadow of the Downs, and in low parts of the New Forest will receive a "fringe" area signal although well within the "primary service area". Such communities may require really elaborate and expensive aerials. High ground is high even if it is only sixty feet and the New Forest itself varies in height from one hundred to four hundred feet. This is enough to make trouble for people who didn't realise they lived in hilly country until they tried to receive a band III picture on an inadequate aerial.

Our current Bulletin contains a more comprehensive article and gives practical examples. A copy will be sent on request.

Advertisement of
BELLING & LEE LTD.
Great Cambridge Rd., Enfield, Middx.
Written 16th April, 1958

"BELLING-LEE"
Printed Circuit Connectors

L.1369 8-pole. L.1370 12-pole
L.1372 18-pole (0.15" Module)
L.1375 8-pole (0.1" Module)

These printed circuit connectors use the board as a plug-in member.

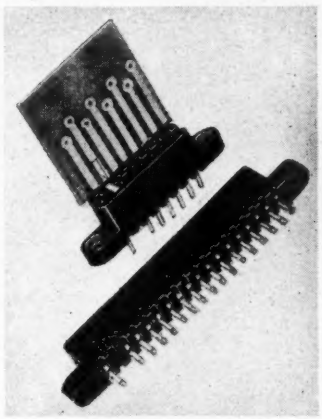

The unique contact spring construction ensures excellent contact with minimum wear on board and connector. Body in high-grade black bakelite carries the contact springs, formed from beryllium copper, heat-treated and gold-plated.

The "tag" ends of the contacts are suitable for dip soldering on printed circuit boards; and a solder bucket is incorporated for conventional wiring techniques. Suitable for printed circuit boards 0.0625in. ± 0.005in. thick, single or double sided.

Correct polarity of insertion can be arranged by removing a contact and replacing it with a polarizing pin (L.1381) which engages with a slot cut in the panel. More than one pin may be used to "code" boards in an assembly.

For maximum contact-life the board must enter the connector "square-on". This can be arranged by guides (L.1380), either mounted on the connector, or spaced from it, and these also support the panel when inserted. They are suitable for use with either 0.15in. or 0.1in. connectors.

Breakdown voltage between pins:
0.15in. module—3.25 kV (sea-level)
550 V. (68,000 ft.)
0.1in. module—2.5 kV (sea-level)
450 V. (68,000 ft.)

Insulation resistance: Greater than 100 megohms.

Contact pressure: 0.15in. module—300 gms. approx. 0.1in. module—300 gms. approx.

Contact resistance: Average 4.7 milliohms approx.

Current rating: For a temperature rise of less than 30°C.:— 4 amps. per contact with conventional wiring. 3 amps. per contact with dip-soldering to a p.c. board.

Endurance: A sample gave contact resistances in the range 5 to 15 milliohms after 3,000 insertions. Samples have survived more than 50,000 insertions without interruption of circuit continuity.

BELLING & LEE LTD
GREAT CAMBRIDGE RD., ENFIELD, MIDDX., ENGLAND
Telephone: Enfield 3322 · Telegrams: Radiohm, Enfield

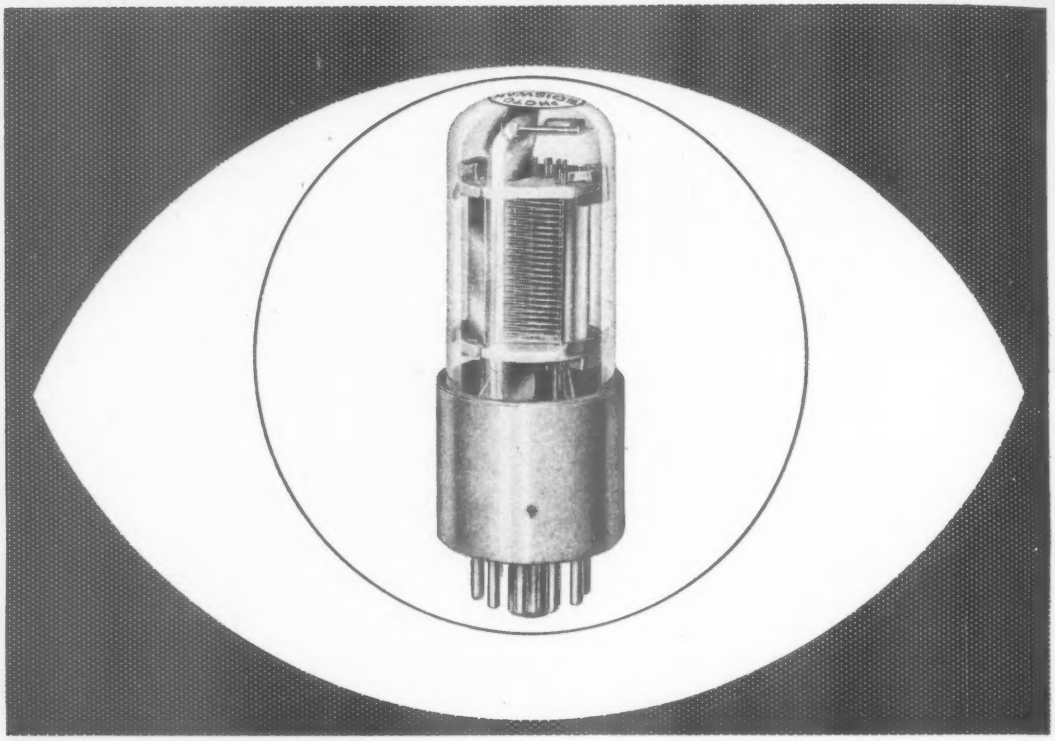

Announcing
two new EDISWAN Photomultipliers

We are pleased to announce two new Ediswan Photomultipliers : Type 27 M12 and Type 27 M13.
Both are based on the well-known Ediswan Photomultiplier Type 27 M1.
Here are brief details of the new types (further particulars will be gladly given on request) :

27 M12

Nine-stage Photomultiplier specially designed for use in aircraft and other locations where strong vibration is experienced.

Base:	Flying Lead
Cathode:	Blue Sensitive
Av. Cathode Sensitivity:	20 μA/lumen
Max. Anode Current:	1 mA
Typical Operation:	
Volts per stage	65V
Volts anode to secondary cathode	65V
Sensitivity (white light)	1.0 A/lumen
Average Current Amplification	60,000
List Price: £18.0.0	

27 M13

Seven-stage Photomultiplier with twin anodes. These provide a double output, which remains well matched under all conditions.

Base:	11 pin sub-magnal
Cathode:	Blue sensitive
Av. Cathode Sensitivity:	15 μA/lumen
Max. Anode Current:	1 mA
Typical Operation:	
Volts per stage	125V
Volts anode to secondary cathode	50V
Sensitivity (white light)	2·0 A/lumen
Average Current Amplification	13,000
List Price: £16.0.0	

Other Photomultipliers in the Ediswan range.

27 M1 Standard high sensitivity type (9 stage)	List price £15.0.0.
27 M2 Lower sensitivity (9 stage) type	List price £ 8.0.0.
27 M3 Sensitive to near ultra violet (9 stage)	List price £16.0.0.

SIEMENS EDISON SWAN LIMITED
AN A.E.I. COMPANY
155 CHARING CROSS ROAD, LONDON, W.C.2 AND BRANCHES
Phone: GERrard 8660. Grams: Sieswan, Westcent, London
CRC 16/5

LETTERS TO THE EDITOR

The Editor does not necessarily endorse the opinions expressed by his correspondents.

"*Hi-Fi*" *and Stereophony*

THERE seems to be a revival of interest in stereophonic sound and this brings back the memory of our first experiments in the subject in the 1920s.

Working in conjunction with the late Capt. A. G. D. West of the B.B.C. we fitted up one transmission from the Opera House, Covent Garden, for stereophonic work.

The two radiators were 2LO and Daventry. How many heard the result, aside from ourselves, I have no record, but to our own receiving arrangements it was fairly satisfactory.

Two microphones spaced a foot or so apart were fixed on the edge of the stage by the footlights at the Opera House and their output ran via two amplifying systems to the two transmitters.

It had previously been noted in earlier non-radiating tests with spaced microphones that, when receiving with two telephone earpieces, movement to the right or left was clearly defined but that in the main the sounds came from the back or the top of one's head.

I believe it was Mr. W. J. Picken who remarked to me on hearing someone walking across the microphone room that it sounded as though someone was walking over his grave.

When using two loudspeakers the effect vanished as the sounds were, of course, being put artificially in front of one.

However, a new effect was noted during the opera transmission. The microphones were, as I stated, placed by the footlights and they were between the stage and the orchestra. With a soprano singing on the stage and the orchestra accompanying her I noted at once that with telephone reception she seemed to be in front of me, but the orchestra sounded behind. Male voices, however, joined the orchestra, so that the effect was in some way due to frequency. West and I had many discussions as to the reasons for these curious effects.

Many obstacles of course are in the way of "hi-fi" and stereophonic sound for normal house use, particularly from radio transmissions. Rooms are not large enough and many wives and neighbours object to the volume of sound necessary for correct effects. The question of sound strength and correct quality was pretty thoroughly thrashed out many years ago—after Harvey Fletcher had published his monumental work on "Speech and Hearing" (Macmillan, 1929), and correcting devices for all strengths were worked out. But then, as now, quality and naturalness were the worry of only a very small percentage of the population.

Nearly everybody in those days, and very probably now, was content with the sound of his own loudspeaker (listen to some of those baby portables) and, however bad it really was, thought it better than his neighbour's.

I know that sometimes I was rather startled by the sort of sound that was acceptable to musical people.

On one occasion the late Mr. Percy Pitt, the then well-known operatic conductor, came over to my rooms in Marconi House to hear some rather lengthy musical piece being played at the Opera House.

At the time I had available only a very bad amplifier and loudspeaker, with the result that there was a lot of distortion.

Mr. Pitt opened his musical score and followed carefully the whole programme with a very satisfied air. Rather fearfully I apologised for the bad quality, to me it was a dreadful blasting effect, but all Mr. Pitt said was "Very excellent, couldn't be better." To him, apparently, as long as the notes were right and he could distinguish the instruments everything was satisfactory.

In many communications I had both by letter and personally with the late Edwin H. Armstrong I urged him to put programmes out stereophonically in his f.m. system, which was "hi-fi" to a great extent, and shortly before his unfortunate death he was starting to do this with his newly developed duplex f.m. system.

This would of course have both simplified transmission and reception—particularly the latter.

But I am rather afraid that radio stereophony with its duplication of most parts including land lines and radio links will not be generally acceptable to the powers.

The surprisingly commercial success of modern high quality gramophone records, however, does give a possible field with comparatively simple apparatus. The difficulty still remains however that until records are produced people will not buy the play-offs and until the play-offs are installed there will be no sale for the records.

It has, however, so often been wrongly said that something won't work or succeed, that I am now only looking at the difficulties and not trying to prophesy failure. The race must go on.

Southgate, London, N.14. H. J. ROUND.

Fixed or Free Stereophony

UNFORTUNATELY the enthusiasm shown by Mr. J. R. P. Bridge for "Free Grid's" binaural headphones is a little premature, since there is a fatal objection to the system.

When listening to music, one is constantly making small unconscious movements of the head, and the resulting changes in phase and intensity at the two ears are accepted as a natural corollary. Similar movements have very disconcerting consequences when wearing headphones, since the whole orchestra and concert hall appear to move also. This may seem a trivial objection, but even the most perfect binaural system soon becomes tiresomely unnatural as a result. A solution would be to sit with one's head in a clamp, but this rather limits the personal mobility which Mr. Bridge thinks desirable!

However, there is an answer, but only for those to whom *any* degree of complexity is justified in the search for perfection. A detection system is required which will register every movement of the listener's head relative to some fixed point in the listening room. This operates a servo-mechanism which continuously adjusts the intensity and time delay of the signals into each earphone in accordance with what would obtain in a free field, and the direction of the apparent sound source remains fixed as a result.

The cost and inconvenience of providing such a set-up for several persons at one time would be much greater than the installation of two conventional loudspeakers, so the present stereophonic compromise is perhaps best after all.

London, S.E.24. H. J. F. CRABBE.

Defining Electronics

THE May editorial draws attention to the problem of defining electronics.

Electronics seems to me to have three characteristics.

(1) It is a study of electric circuits.

(2) Although the inputs and outputs of the circuits may be responsive to, or feed into mechanical, optical, thermal or other physical apparatus the electronic aspect relates to the circuits themselves.

(3) The electric currents are considered primarily with regard to their information content. This is true of a public address system, of a radar installation, of data processing, of counting and measuring equipment and every other application. Efficiency is considered in terms of information lost and of false information (noise) introduced.

Electro-mechanical automatic telephone exchanges do not satisfy the second requirement: a simple telephone circuit has little circuit to study apart from the electro-mechanical devices of microphone and receiver. Valves and transistors, the most typical components of electronic equipment, often have energy-efficiencies lower than those acceptable in power engineering: but they enable information to be transferred and distributed without the introduction of too much noise.

Such a definition would remove from the subject the use of metal rectifiers for electric traction, and the use of valves for the conversion of a.c. to d.c. and *vice versa*, except in so far as they may be controlled by information such as the difference between the actual and the desired voltage output. Cannot these be made gifts to power engineering, just as the power engineer developed the transformer before the electronics engineer required it?

London, S.E.18. N. F. SHEPPARD.

Licence Reminders

UNDER the heading "Bureaucratic Bumbledom" "Free Grid" comments in your May issue on the "impertinent request" contained in the annual reminder for renewal of wireless licences. The wording on reminders sent out before April was not, perhaps, in the happiest terms and the phrasing of the request is one of thousands of forms used in the Post Office which have been under consideration over the past year.

I think that "Free Grid" will agree that the rephrasing now in use is an improvement. It says "To save our bothering you again with reminders, please give the reason below IF YOU ARE NOT RENEWING YOUR LICENCE. Then kindly re-address this card as overleaf and repost it. You don't need a stamp."

Your correspondent wonders why the Postmaster General wants to know the reason for non-renewal. If we printed these reasons on the reminder, as he says, few would read them, so the reminder would become bigger in size, and more costly to print for little purpose.

In brief the reasons are that the Postmaster General has an obligation to see that people do not use wireless sets without licences and, indeed, if a check was not made an unfair hardship would rest on those of us who pay our way. If this check was not made, in part, by answers received from reminder cards a tremendous number of personal enquiries would be necessary, with consequent waste of time and money. When we know that people are no longer using sets we can delete their names from our records and we can also help those who, acting under a misunderstanding, have made themselves liable in law.

London, E.C.1. T. A. O'BRIEN,
Public Relations Officer,
General Post Office.

CLUB NEWS

Barnet.—The inaugural meeting of the Barnet and District Radio Club was held on March 25th. Meetings are to be held on the last Tuesday of each month at the headquarters, No. 1374 Squadron, Air Training Corps, Gloucester Road, New Barnet. Sec.: E. W. Brett (G3LUY), 28 Edward House, Edward Road, New Barnet.

Bexleyheath.—The North Kent Radio Society is planning the formation of an instructional section with special instruction for the many "beginners" among the Society's 50 members. The club meets on alternate Thursdays at 7.30 at the Congregational Hall, Chapel Road. Next meeting on June 12th. Sec.: D. W. Wooderson (G3HKX), 39 Woolwich Road, Bexleyheath.

Birmingham.—"I. G. Y. Research" is the title of the talk to be given to members of the Slade Radio Society by D. Ramsden, of the electron physics department of Birmingham University, on June 6th. Meetings are held on alternate Fridays at 7.45 at the Church House, High Street, Erdington. Sec.: C. N. Smart, 110, Woolmore Road, Erdington, Birmingham, 23.

Bradford.—At the June 3rd meeting of the Bradford Amateur Radio Society, H. D. Kitchin will speak about experimental colour television. The subject to be covered at the meeting on the 17th is radio and television interference. Meetings are held on alternate Tuesdays at 7.30 at Cambridge House, 66 Little Horton Lane, Bradford. Sec.: D. M. Pratt (G3KEP), 27, Woodlands Grove, Cottingley, Bingley.

Downham.—Ravensbourne Amateur Radio Club now holds meetings on alternate Wednesday evenings at Durham Hill School, Downham. G. V. Haylock (G2DHV), hon. secretary of the British 2-Call Club, is chairman of the Ravensbourne Club, which operates station G3HEV. Sec.: J. Wilshaw, 4, Station Road, Bromley, Kent.

Harlow.—A mobile rally has been arranged by the Harlow and District Radio Society for June 22nd at Magdalen Laver Village Hall, Nr. Harlow. Station calls and frequencies are G3ERN (1,980 kc/s) and G3JMA (144.8 Mc/s). Sec.: A. T. White, The Chestnuts, Fyefield, Ongar, Essex.

Ringwood.—The recently formed Ringwood and District Radio Club meets every Wednesday and the last Friday of each month at 7.0 at 23 Merryweather Estate, Ringwood. Sec.: K. Cutler, 19 Pardys Hill, Hurn, Christchurch, Hants.

Stockport-Manchester Rally.—The joint rally of the Stockport Radio Society and the South Manchester Radio Club mentioned last month has been postponed until Sunday, July 13th. It will be held at Capesthorne, Cheshire. Particulars from Charles M. Denny (G6DN), 18 Willoughby Avenue, Didsbury, Manchester, 20.

Worthing.—Meetings of the Worthing and District Amateur Radio Club are held on the second Monday of each month at 8.0 at the Adult Education Centre, Union Place. Sec.: J. R. Tootill, 113 Kings Road, Lancing, Sussex.

THIS MONTH'S EXHIBITIONS AND CONFERENCES

The address of the organizers or the U.K. representatives is given in brackets.

International Conference on Solid State Physics in Electronics and Telecommunications, Brussels, Belgium ..... June 2-7
(Société Belge de Physique, 18 rue de Phillipeville, Loveral, Belgium.)

Armed Forces Communications and Electronics Association Convention and Exhibition, Washington, D.C., U.S.A. ... June 4-6
(A.F.C.E.A., 1624 Eye St. N.W., Washington 6, D.C., U.S.A.)

International Automation Exposition and Congress, New York, U.S.A. ..... June 9-13
(Rimbach Associates, 845 Ridge Ave., Pittsburgh 12, U.S.A.)

International Congress and Exhibition of Electronics and Atomic Energy, Rome, Italy ..... June 16-30
(Agents: Auger and Turner, 40 Gerrard St., London, W.1.)

French Components Show, Paris, France ..... June 20-26
(S.N.I.R., 23 rue de Lubeck, Paris 16.)

Air Transportation Conference, Buffalo, U.S.A. ... June 25-27
(American I.E.E., 33 W. 39th St., N.Y.18, U.S.A.)

ELECTRONS AND HEAT

SOME VITAL STATISTICS

By "CATHODE RAY"

THE fact that it took us the last four *Wireless World* months to graduate from the usual over-simplified theory of electrical conduction to the more sophisticated one favoured by modern science explains why elementary books—and some of the not-so-elementary—don't make the attempt. But since we have done so, and I hope succeeded, it would be a pity not to exploit our achievement by following it up.

Although we ought to know better by now than to try to imagine the unimaginable, nevertheless we probably have formed a mental picture of the atomic structure of a crystalline substance. When a single atom occupied the full field of our mental view we could see how hazy and unsubstantial it was. But a cumulus cloud appears quite solid and clear-cut from a distance, and now that we step back far enough to take in a multitude of atoms they all look remarkably like spheres; not billiard balls again,



Fig. 1. Energy-level diagram for an insulator, in which the valency electrons fully occupy all the energy levels within reach.

certainly, but perhaps tennis balls—new woolly ones, packed closely in three-dimensional array like a wholesale export order. Of course we know that in spite of appearances they are far from solid really, for nearly all their mass is concentrated in the inconceivably small and dense nucleus at the centre; the rest is very nearly empty space, its apparent cloudiness representing only the whirl of equally small electrons. These are not the only ones; each atom has a small number of valency electrons, which are so loosely attached that they seem to belong to the array as a whole rather than to any particular atom, and may be pictured as a faint mistiness of the spaces between.

We know that in spite of the apparent vagueness of the electrons they are governed by strict rules. In each atom they are arranged in a definite energy pattern, with no two exactly the same. Those with the lowest energies are (on the average) nearest the nucleus. The valency electrons, being farthest out, have the greatest energies, but not enough to let them escape clean away. Instead of being confined within very narrow bands like the others, their energies are distributed over wide bands made up of innumerable levels. But, like the other electrons, no more than two (spinning in opposite rotations) can be at any one level at the same time.

There are as many levels in each band as there are atoms in the crystal, so if there are two valency electrons per atom they fill all the levels in their band. This state of affairs is often shown as in Fig. 1, which, let me repeat, is purely an energy diagram. All the lower levels, not shown, are chock-full with the non-valency electrons. Any reasonable e.m.f. applied to the crystal amounts to only a very little per atom—insufficient to give any electron in the filled band enough energy to excite it into the empty band. And because the filled band *is* filled, no electron can rise unless another falls to make room, the net rise therefore being always nil. So the electrons are not in a position to receive any energy from the e.m.f. In other words there is no electric current, and the material is classed as an insulator—notwithstanding that its valency electrons are free to roam around it, *at random*. As a matter of fact, "roam" is perhaps hardly the word; if you take the trouble to work out the velocity an electron must have to amount to several eV (electron-volts) of kinetic energy you will find it is of the order of hundreds of miles per second! But on the average all movements in any direction are cancelled out by equal movements in the opposite direction.

Fig. 2 shows equivalent diagrams for conductors. In (a) there is only one valency electron per atom, so only half the places in the band are filled. At absolute zero temperature (0°K)—which is what we have been assuming so far—they are settled down in the lowest-energy places as shown, all ready to accept the small amounts of energy represented by rises within the band. Such increases of energy are manifested by movement towards the positive pole. Fig. 2(b) represents a metal such as zinc, which has two valency electrons per atom; these fill its band, but because the next higher band overlaps there are again plenty of vacant levels within reach. In our prime material for electrical conductors—copper—both conditions exist at the same time, so we are not surprised that its conductivity is particularly good.

That is as far as we got last time, and you may have been wondering why copper—or any other conductor—has any resistance at all. You have probably learnt that when quite a strong electric current is flowing the net speed of the electrons composing it is only a small fraction of an inch per

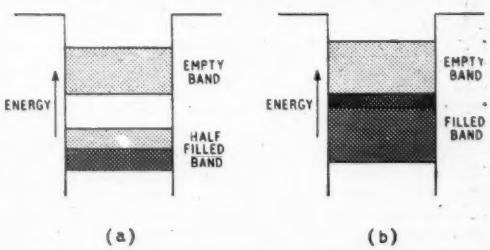

Fig. 2. If valency electrons have direct access to vacant energy levels for either or both of these reasons, the material is a good conductor (i.e., a metal).

second. Now to give an electron a speed of 1 mm/sec, say, the e.m.f. required is less than 3 micro-micromicro-volts, which suggests negligible resistance. What is more to the point, no e.m.f. at all is needed to maintain this or any other speed once it has been started—provided that there are no obstructions.

The elementary explanations tell us that the solid metal is full of obstructions—the atoms—and the free electrons are continually bumping into them, losing the energy the e.m.f. has given them, as heat, and having to start all over again, so that is why their average speed as a current is so small. The awkward thing for this explanation is that the atoms are there to be bumped into whatever the temperature, so the resistance should be constant. If anything, it should fall as the metal is heated, making it expand and so presumably

crystal at 0°K; in other words, under the influence of an e.m.f. the valency electrons can flow through the solid without resistance. But when the spacing of the atoms is thrown into irregularity by heat vibration there is an interference between the electron waves and the atoms whereby the electrons are continually having to give up the extra energy supplied to them by the e.m.f. This energy appears as heat, as the cat knows when it makes for the electric fire. The dissipation of this heat brings the electrons down to lower energy levels, so they don't all get stuck at the top of the band as one might have feared on first looking at Fig. 2. The irregularity, and hence the resistance, increases with temperature; which agrees with experience.

The resistance of substances that are not good conductors *falls* with temperature, usually very steeply. Their resistance, being so great, is hardly

section of the Scientific Instrument Manufacturers Association.

manager of the Company, which he joined in 1951, has also been appointed an executive director.

U.S.A. Visit.—Alfred Rose, managing director of Direct TV Windings, Ltd., and Direct TV Replacements, Ltd., is to visit the U.S.A. in June. He will be negotiating for the production in this country, under licence, of American television components and test equipment.

Perth Radios, Ltd., of Marten House, 39-47, East Road, London, N.1, have been appointed sole U.K. representatives for the Saja tape recorder made in Western Germany. It will be marketed under the joint Perth-Saja trade mark. The company recently appointed **Baker Duthie and Co.**, of 131, West Regent Street, Glasgow, C.2, as their agents for Scotland and Northern Ireland.

Mullard inform us that they received orders for ultrasonic equipment to the value of £70,000 during the I.E.A. exhibition.

Southern Instruments, Ltd., of Camberley, Surrey, announce that Philip Sellars, who is managing director of a number of industrial concerns, has joined the board of directors as vice-chairman. It is also announced that the company is erecting a new laboratory wing, which will increase the floor space to about 70,000 sq ft.

Nu-Life Teletubes, whose reconditioning work on cathode-ray tubes was described in our May issue (page 247), are having a new factory built at South Ruislip, Middlesex, to cope with increased demands for their services.

Metal Blanks, Ltd., of Tudor Grove, London, E.9 (Tel.: Amherst 8484), the recently formed associates of Gate Electronics of the same address, have facilities for producing printed circuits in large or small quantities.

Gillone Electric, Ltd., component manufacturers, whose factory at Camberley, Surrey, was recently severely damaged by fire, are now back in production. The rebuilding of the factory is well under way and they are going ahead with their plans to build another factory giving an additional 15,000 square feet of floor space.

Welwyn Electrical Laboratories announce that their "V" series of vitreous-enamelled wire-wound resistors have been granted full type approval by the Radio Components Standardization Committee.

An American associate company, G. V. Planer, Inc., has been formed in New York by G. V. Planer, Ltd., of Windmill Road, Sunbury-on-Thames, Middlesex.

Henley's engineering sales department has moved from the company's head office in Hatton Garden to 59-62, High Holborn, London, W.C.1.

EXPORTS

First quarter's exports of British radio equipment of all kinds are estimated to be higher than in any previous quarter. The provisional total announced by the Radio

Radio-Telephone Equipment.—A repeat order from the New Zealand Post Office for the supply of multi-channel v.h.f. radio-telephone links has been placed with Marconi's by their agents Amalgamated Wireless (Australasia) Ltd. The order, valued at approximately £90,000, is for terminal equipment, repeaters, aerials and test equipment for four radio links each providing up to 48 telephone channels. All the radio equipment will be in duplicate, the standby gear being automatically switched into service should there be a failure. Marconi's are providing similar equipment for a link between Kingston and Montego Bay, Jamaica, for which the channelling equipment is being supplied by the Automatic Telephone and Electric Co.

Radar.—A complete mobile radar installation (Type CR21) has been ordered from Cossor by the Federal German Ministry of Defence.

Switzerland.—The market for industrial electronic equipment was explored by Dr. J. C. Simmonds, managing director of Airmec, Ltd., during a recent visit to Switzerland. He met representatives of the machine tool industry in Zurich and American industrialists in Basle to consider licensing arrangements.

Nigeria.—Ekiti (Anjuwon) Universal Trading Stores, 5a, Strachan Street, Ebute Metta, Nigeria, are interested in receiving catalogues and price lists from U.K. manufacturers of tropicalized domestic short-wave receivers, amplifiers, tape recorders and loudspeakers.

British East Africa.—A survey of the market for domestic receiving equipment in British East Africa, prepared by the U.K. Trade Commissioner in Nairobi, shows that whereas in 1955 the U.K. provided 34% of the imports of sound receivers and radiogramophones the figure for 1956 was 31% and during the first six months of last year it dropped to 30%. During the same period Western Germany supplied 35%, 35% and 31% respectively and the Netherlands 28%, 31% and 33%.

Measuring Instruments.—Wayne Kerr Laboratories, of Chessington, Surrey, will be demonstrating their universal bridge, Type B221, and its various chemical adaptors, showing the application of the Wayne Kerr three-terminal bridge technique applied to chemical measurements, at the ACHEMA Chemical Engineering Exhibition in Frankfurt, Germany, from May 31st to June 8th.

Instruments and equipment from a number of British manufacturers will be exhibited at the International Electronics and Atomic Energy Exhibition in Rome (June 16th to 30th), by Conway Dolman, of Via Sicilia 235, Rome. The company represents among others Plessey, Rank Cintel, Airmec, Furzehill, Nagard, Southern Instruments, Allied Electronics, Wayne Kerr, J. Langham Thompson, Winston Electronics and Emeco Electronics.

Poland.—For the third successive year Kelvin Hughes are exhibiting at the Poznan International Fair (June 8th-22nd)

PRECISION OSCILLOSCOPES
with exclusive direct reading measurement system
from the E.M.I. range
An outstanding and versatile

Telcon Group profit for 1957 (before taxation) was £626,274, an increase of 26% on the previous year.

North View Engineering Co. is concentrating on the manufacture of wire-wound potentiometers.

Components Exhibition

NEW DESIGNS AND METHODS SEEN AT THIS YEAR'S R.E.C.M.F. SHOW

THE exhibition was again held at Grosvenor House and Park Lane House, London, W.1 (from 14th to 18th April) and was no less congested than on previous occasions. Foreign representatives from 29 countries attended as well as the regular battalions of British designers, engineers and technicians from Government departments and industrial firms.

In the report which follows we deal with some of the new products which interested us and which we think will interest those who were unable to be at the exhibition.

Resistors:—Most manufacturers are now supplying their potentiometers with "spikes" and brackets for printed circuit applications. The Painton "Flatpot," which is designed also for easy stacking, is a minute ($1\frac{1}{4}$in × $\frac{5}{16}$in × $\frac{7}{32}$in overall) preset wire-wound potentiometer with a range of values between 10Ω and 10kΩ. A lead screw, provided with a screwdriver slot, carries the slider along the wire-wound rod and disengages the drive at the end of travel. Two other Painton developments are a new low noise self-cleaning brush gear for professional faders for which a 900:1 reduction in maintenance is claimed, and a potentiometer with an accuracy of linearity of 0·1 per cent without using a cam-corrected wiper. This accuracy is obtained by "potting" all of the winding except the contact surface.

Ardente were exhibiting two new miniature potentiometers as well as the now well-known "hearing-aid" type. One is virtually a scaled-down version of the ordinary volume control and the other is possibly the smallest sliding contact potentiometer with on-off switch at present available in a wide range of values. Known as the Type VC1226 it is only $1\frac{3}{32}$in long overall and it weighs only 0.02oz. The resistance range covers values from 5kΩ to 3MΩ; with a normal tolerance of ±30%. The switch contacts are sub-miniature versions of relay contacts and operate with a wiping action, being actuated by a cam on the wiper carriage. The insulation resistance between the potentiometer and the switch in the "on" position is 100MΩ at 100V d.c.

The edge control potentiometer seems to be a popular solution to the mounting problems caused by the multiplicity of preset and main controls on the modern television receiver. Egen, for instance, group twelve of their Type 293 controls mounted in a panel space 7in × $1\frac{1}{4}$in. Another preset potentiometer by Egen, available in carbon or wire-wound versions, has a replaceable track to reduce costs and ease servicing problems; however, this is of a more conventional form. A.B. Metal Products also had edge control potentiometers on view, and a concentric preset type.

Morganite are producing ganged volume controls, matched for stereophonic use. The matching process employed involves balancing on voltage measurements and the potentiometer is claimed to give outputs within $1\frac{1}{2}$dB of each other.

Ordinary fixed resistor developments are, in the main, confined to extensions of ranges (Dubilier, for instance, now produce their Grade 2 range in values between 10Ω and 22MΩ), and modifications for printed circuit use. The conventional wire-ended resistor has several disadvantages when employed on a printed circuit board, including the difficulty of ensuring correct operation of bandolier feed assembly equipment and fire risk due to the body of the resistor being in close contact with the board. Erie have introduced a new range of resistors with rigid metal tags at right-angles to the main axis of the body, so making insertion less difficult.

U.S.A. Visit.—Alfred Rose, managing director of Direct TV Windings, Ltd., and Direct TV Replacements, Ltd., is to visit the U.S.A. in June. He will be negotiating for the production in this country, under licence, of American television components and test equipment.

Perth Radios, Ltd., of Marten House, 39-47, East Road, London, N.1, have been appointed sole U.K. representatives for the Saja tape recorder made in Western Germany. It will be marketed under the joint Perth-Saja trade mark. The company recently appointed Baker Duthie and Co., of 131, West Regent Street, Glasgow, C.2, as their agents for Scotland and Northern Ireland.

Mullard inform us that they received orders for ultrasonic equipment to the value of £70,000 during the I.E.A. exhibition.

Southern Instruments, Ltd., of Camberley, Surrey, announce that Philip Sellars, who is managing director of a number of industrial concerns, has joined the board of directors as vice-chairman. It is also announced that the company is erecting a new laboratory wing, which will increase the floor space to about 70,000 sq ft.

Nu-Life Teletubes, whose reconditioning work on cathode-ray tubes was described in our May issue (page 247), are having a new factory built at South Ruislip, Middlesex, to cope with increased demands for their services.

Metal Blanks, Ltd., of Tudor Grove, London, E.9 (Tel.: Amherst 8484), the recently formed associates of Gate Electronics of the same address, have facilities for producing printed circuits in large or small quantities.

Gillone Electric, Ltd., component manufacturers, whose factory at Camberley, Surrey, was recently severely damaged by fire, are now back in production. The rebuilding of the factory is well under way and they are going ahead with their plans to build another factory giving an additional 15,000 square feet of floor space.

Welwyn Electrical Laboratories announce that their "V" series of vitreous-enamelled wire-wound resistors have been granted full type approval by the Radio Components Standardization Committee.

An American associate company, G. V. Planer, Inc., has been formed in New York by G. V. Planer, Ltd., of Windmill Road, Sunbury-on-Thames, Middlesex.

Henley's engineering sales department has moved from the company's head office in Hatton Garden to 59-62, High Holborn, London, W.C.1.

EXPORTS

First quarter's exports of British radio equipment of all kinds are estimated to be higher than in any previous quarter. The provisional total announced by the Radio Industry Council is nearly £11.5M, which is about £650,000 more than for the same period last year. The most marked increase was in the export of sound-reproducing equipment, which rose to over £3M.

British component manufacturers are planning to hold an exhibition in Stockholm from September 29th to October 3rd. It is the third Swedish exhibition organized by the Radio and Electronic Component Manufacturers' Federation, the previous two being in 1948 and 1953.

Canada.—An eleven-man delegation from the Dollar Exports Council, headed by Sir William Rootes, has been visiting Canada during the past month. In Canada the Council maintains British Trade Centres in Toronto, Montreal and Vancouver, which are managed for the Council by the Canadian Association of British Manufacturers and Agencies, whose directory ("CABMA Register") is issued jointly by our Publishers and Kelly's Directories.

Servo Test Equipment.—An order worth $121,000 for transfer function analysers for guided missile work has been received from the U.S.A. by the Solartron Electronic Group through its American distributing company Solartron Inc., of Los Angeles, California.

Doppler Navigator.—A Viking aircraft equipped with a Marconi civil Doppler navigator has carried out an extensive demonstration tour of Western Europe.

Sound reproducing equipment for Prince Rainier's new home on the outskirts of Monte Carlo has been installed by Pamphonic Reproducers. The installation includes a.m./f.m. receiver and amplifiers and loudspeakers are fitted in every major room and line source speakers are installed in the garden.

Radio-Telephone Equipment.—A repeat order from the New Zealand Post Office for the supply of multi-channel v.h.f. radio-telephone links has been placed with Marconi's by their agents Amalgamated Wireless (Australasia) Ltd. The order, valued at approximately £90,000, is for terminal equipment, repeaters, aerials and test equipment for four radio links each providing up to 48 telephone channels. All the radio equipment will be in duplicate, the standby gear being automaticaly switched into service should there be a failure. Marconi's are providing similar equipment for a link between Kingston and Montego Bay, Jamaica, for which the channelling equipment is being supplied by the Automatic Telephone and Electric Co.

Radar.—A complete mobile radar installation (Type CR21) has been ordered from Cossor by the Federal German Ministry of Defence.

Switzerland.—The market for industrial electronic equipment was explored by Dr. J. C. Simmonds, managing director of Airmec, Ltd., during a recent visit to Switzerland. He met representatives of the machine tool industry in Zurich and American industrialists in Basle to consider licensing arrangements.

Nigeria.—Ekiti (Anjuwon) Universal Trading Stores, 5a, Strachan Street, Ebute Metta, Nigeria, are interested in receiving catalogues and price lists from U.K. manufacturers of tropicalized domestic short-wave receivers, amplifiers, tape recorders and loudspeakers.

British East Africa.—A survey of the market for domestic receiving equipment in British East Africa, prepared by the U.K. Trade Commissioner in Nairobi, shows that whereas in 1955 the U.K. provided 34% of the imports of sound receivers and radiogramophones the figure for 1956 was 31% and during the first six months of last year it dropped to 30%. During the same period Western Germany supplied 35%, 35% and 31% respectively and the Netherlands 28%, 31% and 33%.

Measuring Instruments.—Wayne Kerr Laboratories, of Chessington, Surrey, will be demonstrating their universal bridge, Type B221, and its various chemical adaptors, showing the application of the Wayne Kerr three-terminal bridge technique applied to chemical measurements, at the ACHEMA Chemical Engineering Exhibition in Frankfurt, Germany, from May 31st to June 8th.

Instruments and equipment from a number of British manufacturers will be exhibited at the International Electronics and Atomic Energy Exhibition in Rome (June 16th to 30th), by Conway Dolman, of Via Sicilia 235, Rome. The company represents among others Plessey, Rank Cintel, Airmec, Furzehill, Nagard, Southern Instruments, Allied Electronics, Wayne Kerr, J. Langham Thompson, Winston Electronics and Emeco Electronics.

Poland.—For the third successive year Kelvin Hughes are exhibiting at the Poznan International Fair (June 8th-22nd). They will be showing marine equipment, industrial instruments and components.

A television link, using travelling-wave tubes both at the terminal stations and at the repeater stations, is to be supplied by Marconi's for the Yugoslav broadcasting authorities. It will link Belgrade and Ljubljana (a distance of some 350 miles). Provision will be made at Sljeme, near Zagreb, for the insertion of programme matter, which could be relayed to Belgrade and Ljubljana simultaneously or to either city.

Electronic equipment, including spectrum analysers and stabilized decade oscillators, worth £70,000, has been ordered by an Italian organization from Winston Electronics, of Shepperton, Middlesex.

Metal Cabinets.—A. G. Imhof, managing director of Alfred Imhof, Ltd., is touring the U.S.A. and Canada investigating the market for Imlok, the interlocking system of metal cabinet construction.

Italy.—Melchioni S.p.A., Via Friuli 16/18, Milan, are interested in securing the representation for Italy of United Kingdom manufacturers of sound and television components and accessories.

Switzerland.—Sorensen Ard A. G., Eichstrasse 29, Zurich 3/45, are interested in representing a U.K. manufacturer of semi-conductors.

Swiss Importers.—Willy Egli and Co., of Zurich, who are agents for a number of British companies, including Tannoy, T.C.C., Rola-Celestion, Ekco and Multicore, have changed their name to Egli, Fischer and Co. Their address is Gotthardstrasse 6, Zurich.

Components Exhibition

NEW DESIGNS AND METHODS SEEN AT THIS YEAR'S R.E.C.M.F. SHOW

THE exhibition was again held at Grosvenor House and Park Lane House, London, W.1 (from 14th to 18th April) and was no less congested than on previous occasions. Foreign representatives from 29 countries attended as well as the regular battalions of British designers, engineers and technicians from Government departments and industrial firms.

In the report which follows we deal with some of the new products which interested us and which we think will interest those who were unable to be at the exhibition.

Resistors:—Most manufacturers are now supplying their potentiometers with "spikes" and brackets for printed circuit applications. The Painton "Flatpot," which is designed also for easy stacking, is a minute ($1\frac{1}{4}$in × $\frac{5}{16}$in × $\frac{7}{32}$in overall) preset wire-wound potentiometer with a range of values between 10Ω and 10kΩ. A lead screw, provided with a screwdriver slot, carries the slider along the wire-wound rod and disengages the drive at the end of travel. Two other Painton developments are a new low noise self-cleaning brush gear for professional faders for which a 900:1 reduction in maintenance is claimed, and a potentiometer with an accuracy of linearity of 0·1 per cent without using a cam-corrected wiper. This accuracy is obtained by "potting" all of the winding except the contact surface.

Ardente were exhibiting two new miniature potentiometers as well as the now well-known "hearing-aid" type. One is virtually a scaled-down version of the ordinary volume control and the other is possibly the smallest sliding contact potentiometer with on-off switch at present available in a wide range of values. Known as the Type VC1226 it is only $1\frac{3}{32}$in long overall and it weighs only 0.02oz. The resistance range covers values from 5kΩ to 3MΩ; with a normal tolerance of ±30%. The switch contacts are subminiature versions of relay contacts and operate with a wiping action, being actuated by a cam on the wiper carriage. The insulation resistance between the potentiometer and the switch in the "on" position is 100MΩ at 100V d.c.

The edge control potentiometer seems to be a popular solution to the mounting problems caused by the multiplicity of preset and main controls on the modern television receiver. Egen, for instance, group twelve of their Type 293 controls mounted in a panel space 7in × $1\frac{1}{2}$in. Another preset potentiometer by Egen, available in carbon or wire-wound versions, has a replaceable track to reduce costs and ease servicing problems; however, this is of a more conventional form. A.B. Metal Products also had edge control potentiometers on view, and a concentric preset type.

Morganite are producing ganged volume controls, matched for stereophonic use. The matching process employed involves balancing on voltage measurements and the potentiometer is claimed to give outputs within $1\frac{1}{2}$dB of each other.

Ordinary fixed resistor developments are, in the main, confined to extensions of ranges (Dubilier, for instance, now produce their Grade 2 range in values between 10Ω and 22MΩ), and modifications for printed circuit use. The conventional wire-ended resistor has several disadvantages when employed on a printed circuit board, including the difficulty of ensuring correct operation of bandolier feed assembly equipment and fire risk due to the body of the resistor being in close contact with the board. Erie have introduced a new range of resistors with rigid metal tags at right-angles to the main axis of the body, so making insertion less difficult. "Shoulders" on the tags, which are shaped to retain the resistor in position for dip soldering, prevent the element itself contacting the panel, thus reducing the fire risk.

Special-purpose resistors were prominent at the exhibition. Metallic film and oxide film resistors were shown by, among other manufacturers, Plessey and Welwyn. The Plessey "Metallux" resistor consists of a nickel-chromium alloy film on a cylindrical ceramic former. The self-inductance is very low, and noise levels compare favourably with wire-wound components. Possibly the most interesting feature of these resistors is that, under pulse conditions with a suitable duty cycle, large overloads can be tolerated. The Welwyn resistor has the oxide film coated on to a ceramic body with silvered end-contacts. Another pointer from Welwyn is that it is possible to obtain greater stability over a wider range

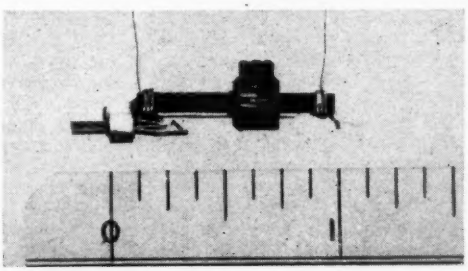

Ardente sub-miniature sliding-contact potentiometer with switch. (Scale in inches.)

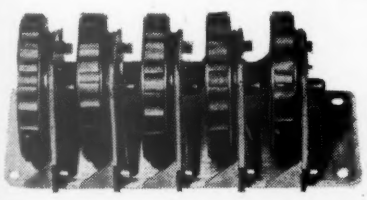

A.B. Metal Products edge control potentiometer assembly.



Painton "Flatpot" miniature wire-wound potentiometer (actual size).

of values than with the previous pan-climatic coating by using Melinex to coat the ordinary high stability resistor.

Morganite exhibited "Morganohm" non-linear resistors made from silicon carbide and clay. These ranged from G.P.O.-approved types, similar in appearance to a ceramic disc capacitor, for protection of low voltage switch and relay contacts to large ¼in thick discs designed to fit into 15-A power sockets in lightning-prone areas, and long "pencil" types for TV e.h.t. stabilization. The laws vary between $I \propto V^4$ for a small disc type unit up to $I \propto V^9$ for a 21-kV e.h.t. stabilizer.

Manufacturers*: A.B. Metal Products (W, F, V); Ardente (V); British Electric Resistance Co. (W, V); Bulgin (W, V); Colvern (V); Dubilier (C, HS, W, V); Egen (V); Electronic Components (W); Electrothermal (C, HS, W, F); Erie (H, S, W); Morganite (C, V); N.S.F. (V); Painton (HS, W, V); Plessey (W, V); Reliance (V); Salford (W); Technograph (F); Welwyn (C, HS, W); Zenith (W, V).
***Abbreviations:** C, composition; HS, high stability; W, wire-wound; V, variable (wire-wound or composition); F, flexible.

Capacitors:—Although most manufacturers have produced small tuning capacitors for transistor receivers probably the smallest on show was the Type C.V.1 on the Ardente stand. This twin-gang capacitor is only about 1in × 1in × 0.6in overall, yet it provides a maximum capacitance of 250pF approximately. Tracking is accomplished by shaping the vanes appropriately and the overall law is designed to widen the tuning over the band occupied by B.B.C. medium-wave stations. The interplate insulation —this is a solid-dielectric capacitor —is p.t.f.e. or polystyrene. Ball bearings are used and the capacitor is mounted in a dust-proof cover.

Jackson Brothers were exhibiting a miniature three-gang capacitor of more conventional construction, which incorporates an epicyclic slow-motion drive. Capacities on this item are r.f. and aerial, 208pF; oscillator, 176pF. It is only slightly larger than their "OO" ganged capacitor.

Whilst in principle not new, a tuning capacitor incorporating a double-pole switch (Plessey) should be mentioned. This two-gang capacitor has a pair of contacts mounted so that, when fully open, the rotor short circuits these to earth. Plessey suggest that this component may be used to switch in preset tuning for the long-wave Light Programme, avoiding the extra complication, size, weight, losses and expense associated with a separate wave-change switch and coils.

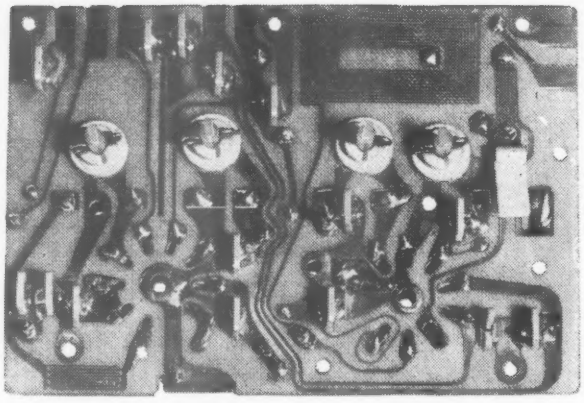

"Chassis" of Cyldon printed circuit TV tuner.

The London Electrical Manufacturing Company's ceramic trimmer for printed wiring consists of a small ceramic tube carrying tags for vertical or horizontal mounting. Part of the exterior of the tube is silvered and forms one "plate," the other being an 8 B.A. brass screw, passing into the centre of the tube. The ceramic material can be chosen to give a compensating temperature coefficient and the trimmer is available in capacities up to 10pF. Mullard announce that they have adapted their popular "beehive" trimmer for printed circuit use.

In the realm of fixed capacitors evidence of development was rather sparse but where it had taken place the results were startling. For instance L.E.M. have produced extremely small 50V-working silvered mica capacitors for transistor applications (Type SM701). Values between 10pF and 500pF are only seven millimetres long and one millimetre in diameter.

It might be thought that glass capacitors are the beginning of a regression to the days of teak and brass terminals. This is not so; L.E.M. have also produced a range of capacitors encapsulated in glass for high ambient temperature applications. They are claimed to perform satisfactorily at 250°C.

A. H. Hunt were exhibiting a range of electrolytic capacitors of values from 75μF at 3V to 0.25μF at 25V in two sizes ⅛in × ⅛in and 1/16in × 3/16in using plain or etched foil. They also had on show double (i.e. $10^3 + 10^3$pF) ceramic discs and "wedge" ceramic decoupling units. These latter were also shown by L.E.M. who have developed a finish for ceramic disc capacitors which acts as a flux—instead of the more usual deterrent action of the coating —for soldering!

Other modifications of existing types were shown by Suflex. These included the use of a Neoprene disc on the wires of single-ended capacitors to keep the wire spacing constant and tinned bronze wire terminations on physically small capacitors. Both modifications ease considerably the insertion by automatic methods of these components into a printed wiring board.

A 0.25μF spark discharge capacitor with self inductance of only 0.1μH was shown by Wego, who were also exhibiting a 50μF 75V capacitor only 3in × 3in × 1½in with an insulation resistance better than 200MΩ. This used Melinex film as a dielectric.

The T.C.C. stand featured the "Superlytic" high quality low leakage electrolytic capacitors which are now in full production. Another T.C.C. capacitor of note is the small metallized polystyrene type. The excellent electrical characteristics of this form of construction renders it ideal for use at r.f. in tuned filters, etc.

Manufacturers*: B.I.C.C. (H, P); Sidney Bird (T); Bulgin (T); Daly (E); Dubilier (C, E, F, H, M, P, T); Erie (C, F, H, T, V); Hunt (C, E, F, H, M, P); Jackson (T, V); L.E.M (C, H, M, P); Mullard (T, V); Mycalex (M); Plessey (A, C, E, F, P, T, V); Stability Capacitors (C, M); Static Condenser (P); Stratton (V); S.T.C. (E, H, M, P); Suflex (F); T.C.C. (A, C, E, F, H, M, P, T); T.M.C. (A, C, F, H, M, P); Walter (T); Wego (F, H, M, P); Welwyn (C); Wingrove and Rogers (T, V).
***Abbreviations:** A, air dielectric; C, ceramic or glass; E, electrolytic; F, plastic film (polystyrene, etc.); H, high voltage; M, mica; P, paper, T, trimmer; V, variable (tuning, etc.).

Coils and Transformers:—The latest i.f. transformers produced by Weymouth are notable for their extremely

small size (¼in square by 1⅞in high). Available for i.fs. of 470kc/s, 1.6Mc/s and 10Mc/s, they have Q values (at 470kc/s) of nominally 100, and up to 150 can be obtained in special versions. The 470-kc/s types have bandwidths of 7.5kc/s at the −3dB points. A 38Mc/s ratio detector transformer for use in combined f.m. and t.v. receivers was shown by Sidney Bird (Cyldon). An a.m. suppression/ratio of 30dB in the centre of the band has been achieved.

Q values up to 105 at frequencies from 12 to 36Mc/s have been reached in a range of miniature r.f. coils wound on low-loss ceramic formers shown by Plessey.

A number of miniature components for computers were shown by Oliver Pell. These included toroidal chokes and transformers, C-core transformers, and relays (for punched card applications).

New ranges of transformers shown by Gresham include some especially designed for maximum heat conduction, a miniature range suitable for use with transistors, and another for high-quality audio amplifiers.

A new range of high-power audio output transformers, the P6000 series, was shown by Partridge. The power ratings are 100 watts at 35c/s or 60 watts at 25c/s for less than 1% total harmonic distortion.

Manufacturers: *A.f. and mains transformers and chokes:*—Richard Allan; Ardente, Associated Electronic Engineers; British Electric Resistance Co.; Electro Acoustic Industries; English Electric; Ferranti; Fortiphone; Goodmans; Gresham; Haddon; Hinchley; Oliver Pell; Parmeko; Partridge; Plessey; Power Controls; Reproducers and Amplifiers; Rola Celestion; Standard Telephones and Cables; Weymouth; Whiteley; Woden; Zenith. *I.f. and r.f. transformers and chokes:*—Plessey; Standard Telephones and Cables; Stratton; Weymouth; Wireless Telephone Co.

Television Components:—The provision of v.h.f. sound facilities on a television receiver does not add an appreciable amount to the cost because modifications to only two sections of the receiver—the tuner and sound detector—are required. Opinion seems to be divided on the best method of providing f.m. facilities in the tuner—for instance A.B. Metal Products have modified their "Fireball" tuner (announced at last year's show) to include three v.h.f. positions on the switch in addition to 14 TV channels (one u.h.f.). This method is also adopted by N.S.F. on their incremental-inductance tuner. The Plessey-Brayhead BT16 tuner provides a choice of this system or one f.m. switch position with continuous tuning over the f.m. band by the fine tuner.

An interesting tuner development was shown by Sidney Bird (Cyldon). Their tuner uses a printed circuit, as distinct from printed wiring. The coil circuits too are printed and these have no pre-set tuning adjustments. The fine tuning control is a small metal plate which is bent towards a single turn printed on the main board, in series with the oscillator coil at the "hot" end. This provides both a capacitive and an eddy current effect. On a low frequency channel the major part of the control is capacitive, tending to reduce the oscillator frequency as the plate approaches the board, but as the frequency is raised the eddy current effect (raising the oscillator frequency) exerts an increasing influence. By balancing carefully the two effects the fine tuning range is constant at 2.5Mc/s on each channel. For the f.m. function the coil circuit is provided with a large oscillator coil stud which shorts out a small capacitor in series with the fine tuner, extending the range to 7Mc/s.

The broad outline of the circuit follows normal lines, but many small refinements are incorporated—i.e. "low noise" a.g.c. feed resistor; screen compensation of the mixer to improve Band III performance; eddy current-tuned i.f. output coil; new low-inductance valveholders; a special board material with good high-frequency characteristics and "wedge" decoupling capacitors, designed to be pressed into slots in the wiring board. The valves used (PCC84 and PCF84) were both specifically designed for a printed circuit layout.

110° scanning coils made their appearance at this year's show. Elac were exhibiting a scanning yoke and Plessey were showing a complete set of components—yoke, line and frame output transformers. The Plessey line scan components require only 17W of h.t. power to give full scanning at 16kV e.h.t. and Elac claim less than 2% barrel and pincushion distortion for their yoke.

Manufacturers*: A.B. Metal Products (T); Sidney Bird (T); Brayhead Products (T); Ekco Plastics (M); Electro Acoustic Industries (D, F); Goodmans Industries (F); Long and Hambly (M); James Neill (F); Plessey (D, ST, F, W, T); Thermoplastics, Ltd. (M); Whiteley Electrical Radio (D, ST, F, W).

***Abbreviations:** D, deflection coils; F, focus, ion trap and picture shift magnets; M, masks; ST, scan transformers; T, tuners (v.h.f. heads); W, width and linearity controls.



Plessey 110° scan-coil assembly. The frame coil is of the toroidal type and the two small bar magnets above and below the coils correct for pincushion distortion.

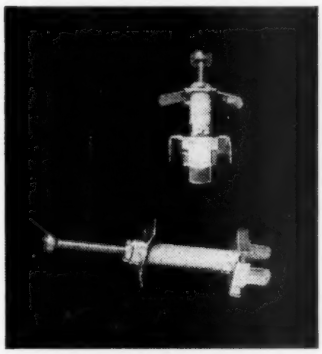

London Electrical Manufacturing Company's ceramic miniature trimmers for printed circuit use (about actual size).

Weymouth miniature i.f. transformer.

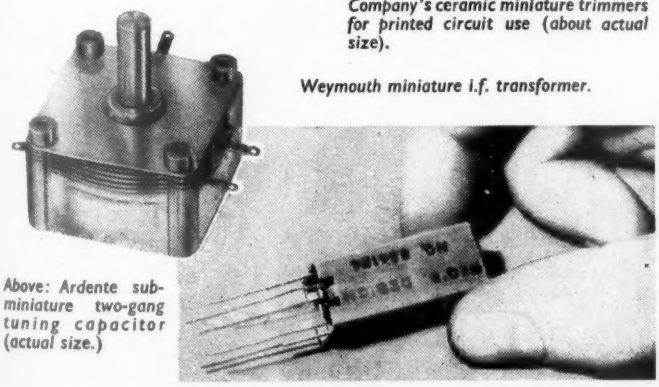

Above: Ardente sub-miniature two-gang tuning capacitor (actual size.)

Aerials and Accessories.—J-Beam were showing (from their Sky-Beam division) a set of aerials for use in the 460 to 480Mc/s mobile communications band, including end-fed dipoles for main and mobile stations and a double stacked slot directional array with a claimed gain of 14.5dB over a reference dipole. This is designed for sector coverage i.e., "looking" up a valley, or along an inhabited strip of coastline.

Television aerials, as at last year's exhibition, seem to be static as far as electrical design is concerned. Wolsey have adopted a wing-nut element clamp which enables them to supply their aerials in a pre-assembled but "collapsed" state. Antiference were showing a new loft aerial for Bands I and III. This consists of a low frequency "V" dipole with telescopic elements and a Band III Yagi-type array. One of the "V" elements can be rotated, making possible the use of the combined aerial in locations where the B.B.C. and I.T.A. transmitters are not co-sited.

J-Beam—well known for their end-fed and skeleton slot aerials—are producing a new range of "conventional" types—one of these, the "Twinbeam" was on show. This is a Band I "H" with a Band III Yagi-type array attached which can be rotated, carrying the Band III reflector with it.

Among the new aerial accessories shown were the "Belling-Lee" range of diplexers and a triplexer all of which use printed circuit construction, the TV diplexers (including a waterproof type for outside use) passing Band II signals through the Band I section. One diplexer (L1360) combines or separates television and f.m. signals.

A cable-to-mast strap was shown by Permanoid. This is a tough Nylon strap, saw-toothed on the inside surface. One end carries a moulding to hold the cable and a slot through which the toothed section is passed, so locking the strap and cable to the mast.

Manufacturers*: Antiference (TA, AS); Belling and Lee (TS, AS, D); Egen (AS); J-Beam (TA, CA); K.L.G. Sparking Plugs (TA); Permanoid (Arrell) (TA, AS); Wolsey (TA, AS, D).
***Abbreviations:** TA, domestic aerials; CA, communications aerials; AS, accessories; D, distribution amplifiers and equipment.

Switches.—Flexibility of switching arrangements is a feature of a miniature rotary switch by Ardente which measures only ¾in across. It is available with up to 4 banks and up to 6-way operation. The spacing between banks can be varied for ease of wiring, and screening plates can be fitted. Wave changing in receivers is one possible application.

The probable trend away from mains switches on volume controls (because of hum trouble) was reflected in a push-button mains switch for separate use displayed by Egen. Its operating stroke is $\frac{7}{8}$in and the shaft can be supplied in any length. Also intended for mains operation, a new N.S.F. rotary switch is basically a wafer type but with a special contact system for high currents up to 5 amps (or 10 amps at 30V d.c.). The rotor contacts are coil-spring loaded and have V-shaped ends. This firm has introduced a new type of locating mechanism for rotary switches which gives extremely positive action. It uses a fixed spring-loaded ball and a rotary corrugated plate. N.S.F. also showed an example of dual concentric spindles for rotary switches, making possible two independent switches in one assembly.

Key switches of unusual design by Henry and Thomas are notable for the low capacitance of less than 2·5pF between the gold-plated contacts (5pF between contacts and frame). Foolproof operation is obtained by providing two parallel paths for each circuit, and there is sealing (to 1·36 atmospheres) between the lever and the body.

Manufacturers*: A.B. Metal Products (K, T, P, R, SL); Ardente (R); B.E.R.C.O. (R, ST); Bulgin (K, T, M, P, R, SL, ST, TH); Diamond H (T, R); Egen (P, R); Henry and Thomas (K, T); Magnetic Devices (P); N.S.F. (K, T, P, R, SL); Painton (T, P, R, ST); Plessey (K, T, P, R, SL); Siemens Edison Swan (TH); S.T.C. (TH); T.M.C. (K, T); Walter (T, P, R, SL, ST); Whiteley (K, P, R, SL, ST).
***Abbreviations:** K, Key; T, lever or toggle; M, micro; P, push-button; R, rotary; SL, slide; ST, stud; TH, thermal delay.

Relays.—High-speed operation and long-life are the main features of an unusual relay shown by Plessey in which the contacts consist of two magnetic reeds sealed inside a glass tube. The reeds are brought together by a solenoid, surrounding the glass tube, which applies a longitudinal magnetic field so that the two reed ends at the 0·005—0·01in contact gap become mutually attracting N and S poles. Several of the sealed tubes (which normally contain dry air but can be evacuated or filled with inert gas) can be inserted in a common operating coil. The "make" time is 0·8 millisecond and the release time better than 0·5 milli-

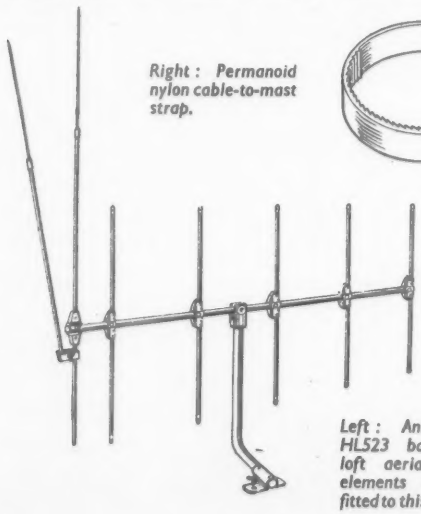

Right: Permanoid nylon cable-to-mast strap.



Right: "Belling-Lee" printed circuit TV/f.m. diplexer. The fixed tuning capacitors are concealed by the printed circuit board.



Left: Antiference HL523 band I/III loft aerial (f.m. elements can be fitted to this aerial).

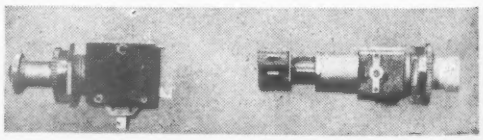

Bulgin switches incorporating signal lamps.

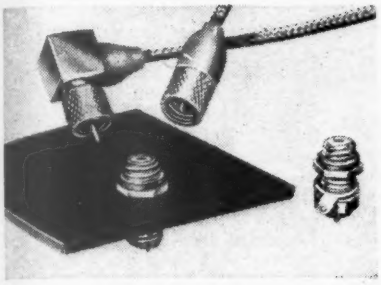

Belling and Lee miniature plugs and sockets.

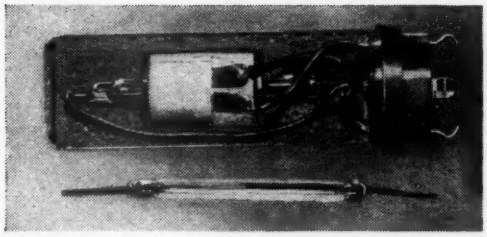

Plessey sealed reed relay (with reed tube below).

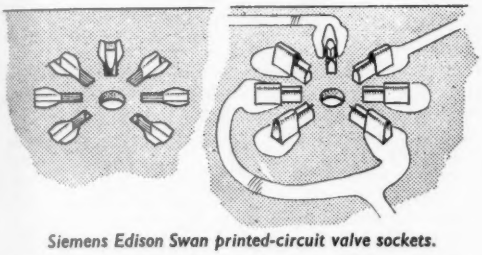

Siemens Edison Swan printed-circuit valve sockets.

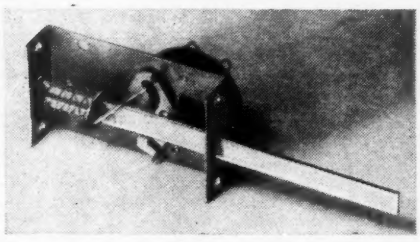

Egen push-button mains switch.

second. The normal "make" action can be changed to a "break" action by means of a biasing permanent magnet, while changeover actions can be achieved from pairs of reed tubes suitably biased and simultaneously energized.

Manufacturers: Diamond H; Electro Methods; Magnetic Devices; N.S.F.; Oliver Pell; Plessey, S.T.C.; Thorn, T.M.C.

Chassis Fittings.—Valveholders for printed circuits can now be dispensed with altogether as a result of a new development by Siemens Edison Swan. This is a valve-pin socket which locks directly into a hole cut in the printed circuit board (see sketch). It can be dip-soldered without affecting the contact area of the socket, and mechanical strain imposed by valve insertion and withdrawal is confined to the locked portion and not transferred to the soldered joint. The socket, which is made of beryllium copper alloy and silver-plated, can be used in other configurations besides valveholders—wherever it is necessary to insert small pins, plugs or component wire ends, in fact.

Another recently introduced connecting device was a subminiature coaxial plug and socket shown by Belling and Lee. The plug is less than ¼in in diameter and is suitable for 50-Ω subminiature coaxial cable. It is retained in position by a knurled nut which screws on to the socket in the printed-circuit board. P.T.F.E. insulation is used and all contact surfaces (which are naturally small) are gold-plated for low-resistance connection.

Widney Dorlec have greatly simplified their prefabricated cabinet design by a system in which the 12 screws originally required for each corner assembly are replaced by 3 bolts. The heads of the bolts are held in channels now incorporated in the main frame sections, and these channels also serve as a convenient means of attaching internal fittings like brackets and hinges.

Holders for two of the latest "glassware" bases were noted. Siemens Edison Swan had a B8F valveholder for transmitting valves, with air spacing to permit forced air cooling of the valve envelope and an incorporated by-pass capacitor between screen grid and earth. McMurdo were showing a B8H holder for the new 110° television c.r. tubes. This is like an octal base but with a somewhat larger spigot hole.

Combined switches and signal lamps were seen on the Bulgin stand—the lamps being incorporated in the press buttons. One type has a push-pull action. Another is actually an operating mechanism and lamp which can be coupled to existing Bulgin switches, and is available for either momentary contact or locking action.

Stratton were showing a new Eddystone tuning capacitor drive and dial assembly which is notable for its smooth action. It has a 110:1 reduction drive using double anti-backlash gears, operating a 500-division logging scale and blank scales for user calibration. The dial measures about 7in × 3in.

Manufacturers*: Antiference (CPS); Bakelite (P); Belling and Lee (CPS, T, F, J, V); B.E.R.C.O. (DL, K); Brayhead (EFC); Bulgin (V, EFC, CPS, DL, ES, T, F, J, K); Carr Fastener (EFC, CPS, T, F, V); H. Clarke (T); Colvern (RPS); Cosmocord (K); Creators (EFC, G, T); Egen (CPS); Electro Methods (CPS, T); Electronic Components (CPS, DL); Fortiphone (CPS); Goodmans (CR); Hallam, Sleigh and Cheston (CR); Harwin (EFC, CPS, T); Hasset and Harper (CR, EFC, ES); Hellermann (EFC, G, T, K); Imhof (CR); Insulating Components (DL, P, T, V); Jackson (DL, DR); K.L.G. (T); Long and Hambly (G); Lustraphone (EFC); McMurdo (V, CPS); Mica and Micanite (EFC, T, V); Morganite (CPS); Mullard (CR); N.S.F. (CPS); Painton (CPS, DL, T, K); Permanoid (CPS); Plessey (CR, CPS, DR, T, P, F, K, V); Power Controls (CPS, T); Salter (EFC); Siemens Edison Swan (CPS, T, V); Simmonds (EFC); Spear (EFC, CPS); Standard Insulator (EFC, G); Stocko (EFC, T); Stratton (CR, CPS, DL, DR, K); Suflex (ES); T.C.C. (P); Telcon (CPS); Thermo-Plastics (CR, DL, ES, T); Thorn (P); T.M.C. (J); Tucker (EFC, G); Tufnol (T); Walter (P); Weymouth (DL, T, K); Whiteley (CR, CPS, T, K, V); Wimbledon (CR, EFC, DL, ES); Wingrove and Rogers (DR, T); Wolsey (CPS).

***Abbreviations:** CPS, connectors, plugs and sockets; CR, cabinets, racks and chassis; DL, dials; DR, drives; EFC, eyelets, fasteners and clips; ES, escutcheons; F, fuseholders; G, grommets; J, jacks; K, knobs; P, printed circuits; T, terminals and tagboards; V, valveholders.

Glassware.—An interesting numerical indicator tube of the glow-discharge type made by S.T.C. has 10 wire cathodes shaped to form the numerals 0-9 and a common anode consisting of two wire meshes at top and bottom. Each cathode is brought out to a particular pin on the duodecal base, and a striking voltage

(200V) applied to the pin produces a glow discharge around the shaped wire inside the tube.

A range of corona voltage stabilizers made by the M-O Valve Company covers voltages from 350V to 2000V. These tubes are particularly suitable for high-voltage low-current supplies for Geiger counters, photomultipliers and cathode-ray devices. The stabilized voltage in most of the types is constant to within ±0.25% for ±10% changes in tube current at 250μA. Striking voltages are about 50V higher than operating voltages. M-O also displayed a new low-noise triode for v.h.f. operation, the VX3519. It has a noise factor of only 1.4dB at 45Mc/s.

Peak currents as high as 33 amps can be passed by a new radar transmitting diode shown by Siemens Edison Swan. Designed to work up to 25kV p.i.v., it features the unusual construction of twelve diode units, with their anodes commoned, arranged in a circle inside the envelope. This firm also had a new 14-inch rectangular c.r. tube, the CME1402, with 90° deflection angle and electrostatic focusing.

Manufacturers*: Cathodeon (Q); Ferranti (CC, IT, M, R, T); M-O (CC, IT, M, PC, R, T); Mullard (CC, IT, M, PC, R, T); Salford (Q); Siemens Edison Swan (CC, IT, PC, R, T); S.T.C. (CC, IT, M, Q, R, R).

***Abbreviations:** CC, cold cathode; IT, industrial and transmitting; M, microwave; PC, photocells; Q, quartz crystals; R, receiving; T, cathode-ray tubes.

Semiconductors. — Many new transistors made their appearance this year, and outstanding amongst them were silicon types capable of working at temperatures up to 150°C. Mullard had three p-n-p alloyed junction types. The OC200 a.f. transistor is similar to the well-known OC71 germanium type, with a typical current gain of 20. The OC201 h.f. type has a cut-off frequency of greater than 2Mc/s and a current gain of 30, while the OC202 has the high current gain of 50 and a cut-off frequency greater than 4Mc/s. All three are notable for their low bottoming point, permitting operation from voltages as small as 1.2V, and their low collector-base leakage current of only 10mμA.

Texas Instruments, exhibiting for the first time, displayed a whole range of n-p-n grown junction silicon transistors. Some of these were medium-power types (4 watts collector dissipation) suitable for audio or servo amplifiers. Higher power types will provide an output of 15 watts at 100°C in Class-B push-pull circuits, while a grown-diffused tetrode can be used in r.f. and i.f. amplifiers at frequencies up to 30Mc/s.

Silicon power rectifiers with diffused junctions are produced by both Texas and Ferranti. As an example of the capabilities of these devices, Ferranti showed an aircraft rectifier containing 36 of their ZR32 diodes arranged in a 6-phase half-wave circuit which delivers up to 1000 amps in a volume of only about 9in × 6in × 6in.

Amongst new germanium transistors Siemens Edison Swan and S.T.C. were showing symmetrical types intended for switching applications. In these the collector and emitter are interchangeable in function and have identical characteristics. S.T.C. also had a new range of audio and low-frequency transistors, while G.E.C. displayed some medium-power types (600mW dissipation) with cut-off frequencies of 750-950kc/s. Incidentally, the G.E.C. type GET6 is now outstanding for its very low noise factor of 3dB at 1kc/s. Last and definitely least—in size—are the Mullard OC57, OC58 and OC59 transistors. These are intended for hearing aids and measure only 0.16in long by 0.12in in diameter. They have current gains of 50, 70 and 100 respectively.

Manufacturers*: Ferranti (D); G.E.C. (D, TR); M-O (D, TR); Mullard (D, TR, TH); Newmarket (TR); Salford (D, MR); Siemens Edison Swan (D, TR); S.T.C. (D, MR, TR, TH); Texas (D, TR); Thorn (TR); Westinghouse (D, MR).

***Abbreviations:** D, diodes; MR, metal rectifiers; TH, thermistors; TR, transistors.

Materials:—Some interesting trends in new uses and improvements of existing materials were seen. For instance the Technograph stand featured developments in the many aspects of printed wiring and circuits. One of these was the roller coating of circuit plate with solder, prior to the insertion of components. This coating—only 5.10^{-4}in thick—helps to eliminate dry joints. Another item on this stand was a printed thermocouple panel on a Terylene sheet base. This can be placed in intimate contact with a surface under investigation, or stacked easily to make a thermopile. Parts of the new Avo Multi-minor were also shown. These use printed cupronickel shunts with small "trimming" bars which are cut, during calibration of the meter, to give the correct resistance.

Aero Research were showing a new hardener for use with Araldite "F" resin. This extends considerably the temperature at which the electrical and mechanical properties of the resin are retained, being satisfactory up to about 250°C.

The base of the modern all-glass valve has to conform to rigid dimensional tolerances. Sintered glass preforms (Mansol (Great Britain), Ltd.) provide a means of satisfying these requirements. The glass is crushed to a fine powder, mixed with a binder and pressed to the shape required. After baking at a low temperature to set the binder the preform is strong enough to withstand normal handling. When the valve or assembly has been fitted to the base, the whole is fired at a temperature sufficient just to fuse the glass. Bases produced in this way have great dimensional accuracy and a high resistance to thermal shock.

The purity of a magnetic alloy is one of the factors limiting its performance. By melting the constituents in a vacuum contamination from atmospheric sources is prevented. A vacuum-melted alloy—Supermendur—was shown by the Telegraph Construction and Maintenance Company. Supermendur gives a μmax value about ten times that for Permendur, and it has the high Curie point of 880°C, making it useful as a magnetic alloy at temperatures up to about 800°C.

James Neill exhibited resin-bonded magnets. These use, as far as is possible, mass-produced, highly efficient cast magnets to which magnetically soft pole pieces are attached with an Araldite bonding resin, so overcoming the difficulties associated with producing and magnetizing complex shapes in the magnetic material itself. Shear strengths up to two tons/in^2 are claimed for this bonding process.

Swift, Levick have succeeded in producing large sections of Columax. They quoted the example of a magnet for nuclear resonance experiments; the system consisted of two sets of four quadrant segments of Columax forming magnetic discs 14in in diameter by 1½in thick. This magnet produces a field ten inches in diameter in a 1.38in gap with a uniformity of field better than one part in 10^5.

Manufacturers*: Aero Research (IM); Anglo American Vulcanized Fibre (IM); Bakelite (IM); Geo. Bray (CE); B. I. Callender's (C, S, W); Clarke (IM, IS, PC); Connollys (C, IM, W); Cosmocord (IM); Creators (IM); Darwins (M); Duratube (CW); Ekco (IM); Enanlon (IM); English Electric (L); Enthoven (S); Ferranti (F); Fine Wires (W); Formica (IM); Fortiphone (C); Hellermann (IM, PC, RP); Henley's (C, IM, W); Insulating Components and Materials (IM, PC); K.L.G. Sparking Plugs (IM); Langley London (IM); Linton and Hurst (L); Lion Electronic Developments (IM); London Electric Wire and Smiths (W); Long and

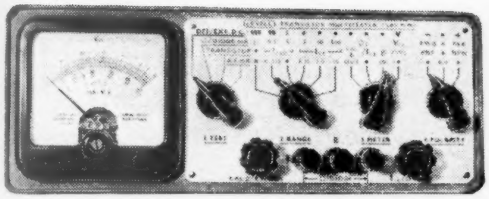

Levell transistor test set TM1 shown by Ardente.

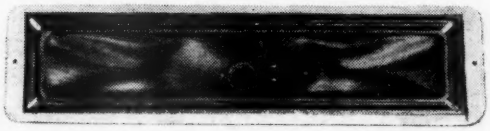

Richard Allan 10×2¾-in "slot" loudspeaker.

Hambly (IM, RP); Magnetic and Electrical Alloys (L, M); Mansol (IM); Marrison and Catherall (L, M); Mica and Micanite Supplies (IM); Micanite and Insulators (IM); Minnesota Mining (IM); Mullard (M, DC, F); Multicore (S); Murex (M, RM); Mycalex (IM); James Neill (M); Permanoid (C, IM, W); Plessey (IM, M, CE); Salford (DC, M); Scott (L); Shell Chemicals (IM); Siemens Edison Swan (IM); Sims (C, W); Standard Insulator (RP); S.T.C. (M); Steatite (CE), Suflex (IM, W); Swift, Levick (M); Symons (IM); T.C.C. (PC); Technical Ceramics (PE); Technograph (PC); Telcon (L); Telegraph Construction and Maintenance (C, DC, IM, L, M, RM, W); Telephone Mfg. (DC); Thermo-Plastics (IM); Tufnol (IM); Vactite (W); Wandleside (C, W); Whiteley (L, M, PC); Wiggin (RM).

Abbreviations: C, cables; CE, ceramics; DC, dust cores; F, ferrites; IM, insulating materials; L, core laminations and strip; M, magnets and magnetic alloys; PC, printed circuits; PE, piezo-electric ceramics; RM, refractory metals; RP, rubber parts; S, solder; W, bare or covered wires.

Audio Equipment:—Many items were also seen at the Audio Fair and are discussed in our report on that exhibition.

Remote control over a short distance can be carried out using sound generated at a frequency around 15 kc/s, and a small crystal microphone insert suitable for such work was shown by Cosmocord (the MIC41).

A fully tropicalized turnover moving iron cartridge with a high output was shown by Goldring. A version especially suitable for use with transistors will deliver 80μW into a 1,000Ω load. Another new turnover variable reluctance cartridge for manufacturers also shown by Goldring has a lateral compliance not less than 5×10^{-6} cm/dyne, the effective mass at the sapphire stylus tip being 2 mgm.

A v.h.f./f.m. "front-end" for set manufacturers shown by Plessey and Brayhead is designed around a single ECC85 or UCC85 double triode, one section being used as a neutralized r.f. amplifier and the other as a mixer-oscillator with i.f. feedback. The high overall gain of 58dB has been achieved.

For use with battery record players, a new motor shown by E.M.I. consumes 100mA from a 6 to 9V supply at the designed working torque of 4 gm-cm. 78 r.p.m. can be reached with a 12-in record in only 1 sec. A twin contact centrifugal governor is used.



S.T.C. numerical indicator tube.

For maximum realism the best position for the loudspeaker in a television receiver is at the front, near the picture, particularly if someone is speaking. If the cabinet is not to be greatly enlarged this necessitates an elongated rectangular speaker shape. Cone break-up tends to occur at a lower frequency and with more unpleasant audible effects in such elongated speakers, and is often due to the stresses set up at the corners. In the Richard Allan $10\times2\frac{3}{8}$in "slot" rectangular speaker these stresses are relieved by holes cut in the cone at its corners. Cone break up is inhibited by the peculiar cross section adopted for the cone, which contains a number of shallow depressions and protuberances. Another way of inhibiting cone break up is to use a narrower apex angle than usual. This was exemplified in $8\times2\frac{3}{8}$in elliptical and rectangular speakers shown by Goodmans and Plessey respectively. Some space can also be saved by reducing the structure supporting the speaker cone to its absolute minimum, for example, at the cone edge. A new range of speakers in which this is done was shown by Goodmans.

A new 2½in tweeter using a p.v.c. cone to smooth out the response through its self-damping was shown by E.M.I. An inner aluminium portion has been used in loudspeaker cones to inhibit break-up and extend the high-frequency response. In the E.M.I. standard range of elliptical speakers this portion extends as far as about one-third of the way to the edge.

Manufacturers: *Loudspeakers*:—Richard Allan; E.M.I.; Electro-Acoustic Industries; Goodmans; Plessey; Reslosound; Reproducers and Amplifiers; Rola Celestion; Truvox; Vitavox; Whiteley Electrical.
Magnetic Tape:—Minnesota Mining and Manufacturing Co.
Pickups and Microphones:—Ardente; Collaro; Cosmocord; Fortiphone; Garrard; Goldring; Lustraphone; Simon; Technical Ceramics; Vitavox; Walter; Whiteley Electrical.
Tape Recorders:—Collaro; Simon; Truvox; Walter.
Turntables:—Collaro; Garrard; Goldring.



Plessey-Brayhead v.h.f./f.m. "front end."

Test Equipment:—The compact p-n-p and n-p-n transistor tester (Type TM1) made by Levell Electronics, of Edgware, was shown on the Ardente stand as an example of the use of their miniature components. Transistor gains (at 1kc/s) and collector cut-off currents can be measured, and also diode forward resistances and reverse currents. Ranges for measuring a.c. voltage and current, d.c. voltage, and resistance are also provided. A simple "go/no-go" transistor gain and collector cut-off current tester was shown by Parmeko.

A portable television signal generator similar to their 405D but for 625 lines was shown by Waveforms. Simultaneous vision and f.m. sound signals with a constant carrier frequency difference of 5.5Mc/s may be obtained on Bands I or III or also over the i.f. band from 31.5 to 40Mc/s. Also shown by Waveforms was their model 302, a new portable oscilloscope similar to their 301 but with a frequency response extended down to d.c.

Manufacturers: British Physical Laboratories; Lion Electronic Developments; Measuring Instruments (Pullin); Siemens Edison Swan; Taylor; Victoria Instruments; Waveforms.

Transistor Miniature Tape Recorder

THE STUZZI MAGNETTE

SEVERAL electronic and mechanical features of interest are to be found in this Austrian tape recorder, which is being imported into this country. Taking the electronics first, a transformerless single-ended, push-pull output stage can give up to 350mW in the 32-Ω, 4-in internal loudspeaker; two OC308 transistors being used. When recording, these same two transistors provide the 40kc/s bias and erase supplies through a transformer feeding the record/replay head and the low-loss ferrite erase head. The bias is also rectified to produce the 60-V h.t. supply required for the DM71 level indicator.

The output varies by less than ±3dB from 80 to 9,000 or 4,000c/s at the alternative tape speeds of 3¾ or 1⅞in/sec respectively. The good contact between the tape and the record/replay head implied by this high frequency response is obtained without the use of a pressure pad.

The capstan motor is pivoted by two trunnions located in either of two pairs of slots in the supporting base. The motor is shifted from one pair to the other by linkages attached to the speed change control. In this way, either of the two edges of the stepped diameter end of the rotating motor shaft are made to bear on the capstan flywheel rim. The capstan also drives the take-up reel by means of a spring belt which slips at the small diameter capstan drive shaft, thus giving the required tape tension. A revolution counter is driven from the supply reel.

The other end of the capstan motor shaft drives a contact switch centrifugal speed regulator. This intermittently joins the base and collector of an OC302 transistor, and thus shorts out a 100Ω resistor connected between the collector and emitter and in series with the 9V supply to the motor. In this way, the average voltage on the motor is kept at the required level of 5V and the speed remains constant to within 2% as the battery supply falls from 9 to 5V. The contact current is very low and long contact life is thus ensured.

Fast forward and rewind of 400ft of tape (up to 4-in diameter reels can be used) takes about two minutes using a separate motor. This is fed from the same 9V supply as the capstan motor. Two additional 4½V supplies in series are used for the amplifier and oscillator. Normal flashlamp batteries are suitable for all the supplies. Their life will generally be about 30 hours or more, so that the running costs are about a penny an hour or less.

An indication of when the amplifier and oscillator battery supply is running down is provided by the DM71 level indicator which will cease to glow when its h.t. supply becomes too low. An electromechanical indicator shows when the motor battery supply needs replacing. This consists of four white vanes (shaped like a cross) which rotate to indicate the current through the capstan motor. When this current is held correctly by the centrifugal regulator, these vanes show in a similarly cross-shaped viewing hole. If the battery voltage falls so far that the regulator is no longer able to hold the motor current to its correct value, these vanes will at first vibrate, and later rotate away from the viewing hole.

The dimensions of this recorder are only 11 × 8 × 4½-in and its weight is 7 lb (with batteries). It is imported into this country by Recording Devices, Ltd., 95, Villiers Road, London, N.W.2, and costs 69 guineas.

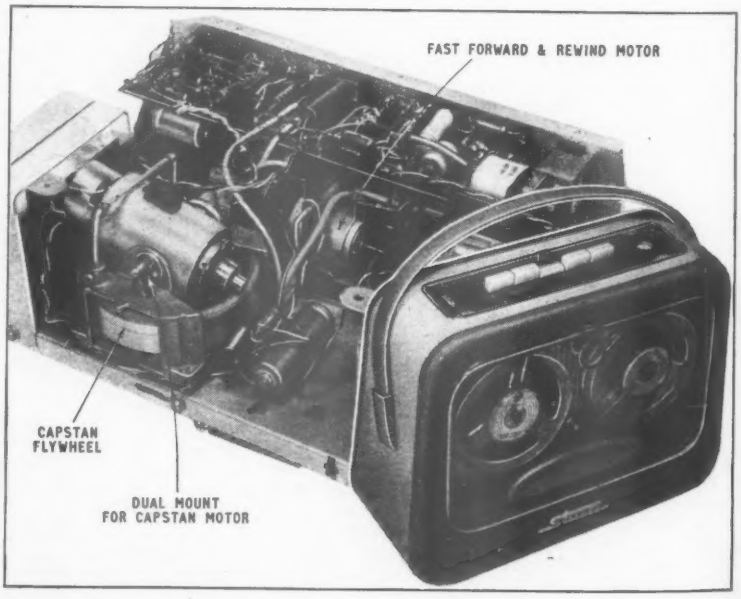

Interior of "Magnette" showing mechanical tape drive arrangements and (inset) the complete recorder.

LETTERS TO THE EDITOR

The Editor does not necessarily endorse the opinions expressed by his correspondents.

"Hi-Fi" and Stereophony

THERE seems to be a revival of interest in stereophonic sound and this brings back the memory of our first experiments in the subject in the 1920s.

Working in conjunction with the late Capt. A. G. D. West of the B.B.C. we fitted up one transmission from the Opera House, Covent Garden, for stereophonic work.

The two radiators were 2LO and Daventry. How many heard the result, aside from ourselves, I have no record, but to our own receiving arrangements it was fairly satisfactory.

Two microphones spaced a foot or so apart were fixed on the edge of the stage by the footlights at the Opera House and their output ran via two amplifying systems to the two transmitters.

It had previously been noted in earlier non-radiating tests with spaced microphones that, when receiving with two telephone earpieces, movement to the right or left was clearly defined but that in the main the sounds came from the back or the top of one's head.

I believe it was Mr. W. J. Picken who remarked to me on hearing someone walking across the microphone room that it sounded as though someone was walking over his grave.

When using two loudspeakers the effect vanished as the sounds were, of course, being put artificially in front of one.

However, a new effect was noted during the opera transmission. The microphones were, as I stated, placed by the footlights and they were between the stage and the orchestra. With a soprano singing on the stage and the orchestra accompanying her I noted at once that with telephone reception she seemed to be in front of me, but the orchestra sounded behind. Male voices, however, joined the orchestra, so that the effect was in some way due to frequency. West and I had many discussions as to the reasons for these curious effects.

Many obstacles of course are in the way of "hi-fi" and stereophonic sound for normal house use, particularly from radio transmissions. Rooms are not large enough and many wives and neighbours object to the volume of sound necessary for correct effects. The question of sound strength and correct quality was pretty thoroughly thrashed out many years ago—after Harvey Fletcher had published his monumental work on "Speech and Hearing" (Macmillan, 1929), and correcting devices for all strengths were worked out. But then, as now, quality and naturalness were the worry of only a very small percentage of the population.

Nearly everybody in those days, and very probably now, was content with the sound of his own loudspeaker (listen to some of those baby portables) and, however bad it really was, thought it better than his neighbour's.

I know that sometimes I was rather startled by the sort of sound that was acceptable to musical people.

On one occasion the late Mr. Percy Pitt, the then well-known operatic conductor, came over to my rooms in Marconi House to hear some rather lengthy musical piece being played at the Opera House.

At the time I had available only a very bad amplifier and loudspeaker, with the result that there was a lot of distortion.

Mr. Pitt opened his musical score and followed carefully the whole programme with a very satisfied air. Rather fearfully I apologised for the bad quality, to me it was a dreadful blasting effect, but all Mr. Pitt said was "Very excellent, couldn't be better." To him, apparently, as long as the notes were right and he could distinguish the instruments everything was satisfactory.

In many communications I had both by letter and personally with the late Edwin H. Armstrong I urged him to put programmes out stereophonically in his f.m. system, which was "hi-fi" to a great extent, and shortly before his unfortunate death he was starting to do this with his newly developed duplex f.m. system.

This would of course have both simplified transmission and reception—particularly the latter.

But I am rather afraid that radio stereophony with its duplication of most parts including land lines and radio links will not be generally acceptable to the powers.

The surprisingly commercial success of modern high quality gramophone records, however, does give a possible field with comparatively simple apparatus. The difficulty still remains however that until records are produced people will not buy the play-offs and until the play-offs are installed there will be no sale for the records.

It has, however, so often been wrongly said that something won't work or succeed, that I am now only looking at the difficulties and not trying to prophesy failure. The race must go on.

Southgate, London, N.14. H. J. ROUND.

Fixed or Free Stereophony

UNFORTUNATELY the enthusiasm shown by Mr. J. R. P. Bridge for "Free Grid's" binaural headphones is a little premature, since there is a fatal objection to the system.

When listening to music, one is constantly making small unconscious movements of the head, and the resulting changes in phase and intensity at the two ears are accepted as a natural corollary. Similar movements have very disconcerting consequences when wearing headphones, since the whole orchestra and concert hall appear to move also. This may seem a trivial objection, but even the most perfect binaural system soon becomes tiresomely unnatural as a result. A solution would be to sit with one's head in a clamp, but this rather limits the personal mobility which Mr. Bridge thinks desirable!

However, there is an answer, but only for those to whom *any* degree of complexity is justified in the search for perfection. A detection system is required which will register every movement of the listener's head relative to some fixed point in the listening room. This operates a servo-mechanism which continuously adjusts the intensity and time delay of the signals into each earphone in accordance with what would obtain in a free field, and the direction of the apparent sound source remains fixed as a result.

The cost and inconvenience of providing such a set-up for several persons at one time would be much greater than the installation of two conventional loudspeakers, so the present stereophonic compromise is perhaps best after all.

London, S.E.24. H. J. F. CRABBE.

Defining Electronics

THE May editorial draws attention to the problem of defining electronics.

Electronics seems to me to have three characteristics.

(1) It is a study of electric circuits.

(2) Although the inputs and outputs of the circuits may be responsive to, or feed into mechanical, optical, thermal or other physical apparatus the electronic aspect relates to the circuits themselves.

(3) The electric currents are considered primarily with regard to their information content. This is true of a public address system, of a radar installation, of data processing, of counting and measuring equipment and every other application. Efficiency is considered in terms of information lost and of false information (noise) introduced.

Electro-mechanical automatic telephone exchanges do not satisfy the second requirement: a simple telephone circuit has little circuit to study apart from the electro-mechanical devices of microphone and receiver. Valves and transistors, the most typical components of electronic equipment, often have energy-efficiencies lower than those acceptable in power engineering: but they enable information to be transferred and distributed without the introduction of too much noise.

Such a definition would remove from the subject the use of metal rectifiers for electric traction, and the use of valves for the conversion of a.c. to d.c. and *vice versa*, except in so far as they may be controlled by information such as the difference between the actual and the desired voltage output. Cannot these be made gifts to power engineering, just as the power engineer developed the transformer before the electronics engineer required it?

London, S.E.18. N. F. SHEPPARD.

Licence Reminders

UNDER the heading "Bureaucratic Bumbledom" "Free Grid" comments in your May issue on the "impertinent request" contained in the annual reminder for renewal of wireless licences. The wording on reminders sent out before April was not, perhaps, in the happiest terms and the phrasing of the request is one of thousands of forms used in the Post Office which have been under consideration over the past year.

I think that "Free Grid" will agree that the rephrasing now in use is an improvement. It says "To save our bothering you again with reminders, please give the reason below IF YOU ARE NOT RENEWING YOUR LICENCE. Then kindly re-address this card as overleaf and repost it. You don't need a stamp."

Your correspondent wonders why the Postmaster General wants to know the reason for non-renewal. If we printed these reasons on the reminder, as he says, few would read them, so the reminder would become bigger in size, and more costly to print for little purpose.

In brief the reasons are that the Postmaster General has an obligation to see that people do not use wireless sets without licences and, indeed, if a check was not made an unfair hardship would rest on those of us who pay our way. If this check was not made, in part, by answers received from reminder cards a tremendous number of personal enquiries would be necessary, with consequent waste of time and money. When we know that people are no longer using sets we can delete their names from our records and we can also help those who, acting under a misunderstanding, have made themselves liable in law.

London, E.C.1. T. A. O'BRIEN,
Public Relations Officer,
General Post Office.

CLUB NEWS

Barnet.—The inaugural meeting of the Barnet and District Radio Club was held on March 25th. Meetings are to be held on the last Tuesday of each month at the headquarters, No. 1374 Squadron, Air Training Corps, Gloucester Road, New Barnet. Sec.: E. W. Brett (G3LUY), 28 Edward House, Edward Road, New Barnet.

Bexleyheath.—The North Kent Radio Society is planning the formation of an instructional section with special instruction for the many "beginners" among the Society's 50 members. The club meets on alternate Thursdays at 7.30 at the Congregational Hall, Chapel Road. Next meeting on June 12th. Sec.: D. W. Wooderson (G3HKX), 39 Woolwich Road, Bexleyheath.

Birmingham.—"I. G. Y. Research" is the title of the talk to be given to members of the Slade Radio Society by D. Ramsden, of the electron physics department of Birmingham University, on June 6th. Meetings are held on alternate Fridays at 7.45 at the Church House, High Street, Erdington. Sec.: C. N. Smart, 110, Woolmore Road, Erdington, Birmingham, 23.

Bradford.—At the June 3rd meeting of the Bradford Amateur Radio Society, H. D. Kitchin will speak about experimental colour television. The subject to be covered at the meeting on the 17th is radio and television interference. Meetings are held on alternate Tuesdays at 7.30 at Cambridge House, 66 Little Horton Lane, Bradford. Sec.: D. M. Pratt (G3KEP), 27, Woodlands Grove, Cottingley, Bingley.

Downham.—Ravensbourne Amateur Radio Club now holds meetings on alternate Wednesday evenings at Durham Hill School, Downham. G. V. Haylock (G2DHV), hon. secretary of the British 2-Call Club, is chairman of the Ravensbourne Club, which operates station G3HEV. Sec.: J. Wilshaw, 4, Station Road, Bromley, Kent.

Harlow.—A mobile rally has been arranged by the Harlow and District Radio Society for June 22nd at Magdalen Laver Village Hall, Nr. Harlow. Station calls and frequencies are G3ERN (1,980 kc/s) and G3JMA (144.8 Mc/s). Sec.: A. T. White, The Chestnuts, Fyefield, Ongar, Essex.

Ringwood.—The recently formed Ringwood and District Radio Club meets every Wednesday and the last Friday of each month at 7.0 at 23 Merryweather Estate, Ringwood. Sec.: K. Cutler, 19 Pardys Hill, Hurn, Christchurch, Hants.

Stockport-Manchester Rally.—The joint rally of the Stockport Radio Society and the South Manchester Radio Club mentioned last month has been postponed until Sunday, July 13th. It will be held at Capesthorne, Cheshire. Particulars from Charles M. Denny (G6DN), 18 Willoughby Avenue, Didsbury, Manchester, 20.

Worthing.—Meetings of the Worthing and District Amateur Radio Club are held on the second Monday of each month at 8.0 at the Adult Education Centre, Union Place. Sec.: J. R. Tootill, 113 Kings Road, Lancing, Sussex.

THIS MONTH'S EXHIBITIONS AND CONFERENCES

The address of the organizers or the U.K. representatives is given in brackets.

International Conference on Solid State Physics in Electronics and Telecommunications, Brussels, Belgium ..... June 2-7
(Société Belge de Physique, 18 rue de Phillipeville, Loveral, Belgium.)

Armed Forces Communications and Electronics Association Convention and Exhibition, Washington, D.C., U.S.A. ... June 4-6
(A.F.C.E.A., 1624 Eye St. N.W., Washington 6, D.C., U.S.A.)

International Automation Exposition and Congress, New York, U.S.A. ..... June 9-13
(Rimbach Associates, 845 Ridge Ave., Pittsburgh 12, U.S.A.)

International Congress and Exhibition of Electronics and Atomic Energy, Rome, Italy ..... June 16-30
(Agents: Auger and Turner, 40 Gerrard St., London, W.1.)

French Components Show, Paris, France ..... June 20-26
(S.N.I.R., 23 rue de Lubeck, Paris 16.)

Air Transportation Conference, Buffalo, U.S.A. ... June 25-27
(American I.E.E., 33 W. 39th St., N.Y.18, U.S.A.)

ELECTRONS AND HEAT

SOME VITAL STATISTICS

By "CATHODE RAY"

THE fact that it took us the last four *Wireless World* months to graduate from the usual over-simplified theory of electrical conduction to the more sophisticated one favoured by modern science explains why elementary books—and some of the not-so-elementary—don't make the attempt. But since we have done so, and I hope succeeded, it would be a pity not to exploit our achievement by following it up.

Although we ought to know better by now than to try to imagine the unimaginable, nevertheless we probably have formed a mental picture of the atomic structure of a crystalline substance. When a single atom occupied the full field of our mental view we could see how hazy and unsubstantial it was. But a cumulus cloud appears quite solid and clear-cut from a distance, and now that we step back far enough to take in a multitude of atoms they all look remarkably like spheres; not billiard balls again,



Fig. 1. Energy-level diagram for an insulator, in which the valency electrons fully occupy all the energy levels within reach.

certainly, but perhaps tennis balls—new woolly ones, packed closely in three-dimensional array like a wholesale export order. Of course we know that in spite of appearances they are far from solid really, for nearly all their mass is concentrated in the inconceivably small and dense nucleus at the centre; the rest is very nearly empty space, its apparent cloudiness representing only the whirl of equally small electrons. These are not the only ones; each atom has a small number of valency electrons, which are so loosely attached that they seem to belong to the array as a whole rather than to any particular atom, and may be pictured as a faint mistiness of the spaces between.

We know that in spite of the apparent vagueness of the electrons they are governed by strict rules. In each atom they are arranged in a definite energy pattern, with no two exactly the same. Those with the lowest energies are (on the average) nearest the nucleus. The valency electrons, being farthest out, have the greatest energies, but not enough to let them escape clean away. Instead of being confined within very narrow bands like the others, their energies are distributed over wide bands made up of innumerable levels. But, like the other electrons, no more than two (spinning in opposite rotations) can be at any one level at the same time.

There are as many levels in each band as there are atoms in the crystal, so if there are two valency electrons per atom they fill all the levels in their band. This state of affairs is often shown as in Fig. 1, which, let me repeat, is purely an energy diagram. All the lower levels, not shown, are chock-full with the non-valency electrons. Any reasonable e.m.f. applied to the crystal amounts to only a very little per atom—insufficient to give any electron in the filled band enough energy to excite it into the empty band. And because the filled band *is* filled, no electron can rise unless another falls to make room, the net rise therefore being always nil. So the electrons are not in a position to receive any energy from the e.m.f. In other words there is no electric current, and the material is classed as an insulator—notwithstanding that its valency electrons are free to roam around it, *at random*. As a matter of fact, "roam" is perhaps hardly the word; if you take the trouble to work out the velocity an electron must have to amount to several eV (electron-volts) of kinetic energy you will find it is of the order of hundreds of miles per second! But on the average all movements in any direction are cancelled out by equal movements in the opposite direction.

Fig. 2 shows equivalent diagrams for conductors. In (a) there is only one valency electron per atom, so only half the places in the band are filled. At absolute zero temperature (0°K)—which is what we have been assuming so far—they are settled down in the lowest-energy places as shown, all ready to accept the small amounts of energy represented by rises within the band. Such increases of energy are manifested by movement towards the positive pole. Fig. 2(b) represents a metal such as zinc, which has two valency electrons per atom; these fill its band, but because the next higher band overlaps there are again plenty of vacant levels within reach. In our prime material for electrical conductors—copper—both conditions exist at the same time, so we are not surprised that its conductivity is particularly good.

That is as far as we got last time, and you may have been wondering why copper—or any other conductor—has any resistance at all. You have probably learnt that when quite a strong electric current is flowing the net speed of the electrons composing it is only a small fraction of an inch per

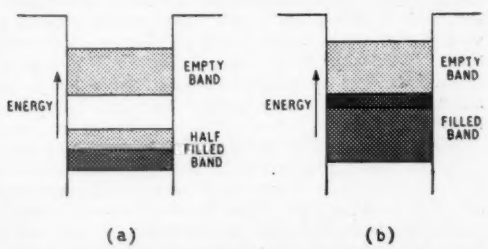

Fig. 2. If valency electrons have direct access to vacant energy levels for either or both of these reasons, the material is a good conductor (i.e., a metal).

second. Now to give an electron a speed of 1 mm/sec, say, the e.m.f. required is less than 3 micro-micromicro-volts, which suggests negligible resistance. What is more to the point, no e.m.f. at all is needed to maintain this or any other speed once it has been started—provided that there are no obstructions.

The elementary explanations tell us that the solid metal is full of obstructions—the atoms—and the free electrons are continually bumping into them, losing the energy the e.m.f. has given them, as heat, and having to start all over again, so that is why their average speed as a current is so small. The awkward thing for this explanation is that the atoms are there to be bumped into whatever the temperature, so the resistance should be constant. If anything, it should fall as the metal is heated, making it expand and so presumably relieving the congestion a little. In fact, however, the resistance of pure metals begins at or near zero at 0°K and increases pretty steadily as the temperature rises. Authorities try to talk themselves out of this by saying that to raise the temperature of anything means giving it heat—a form of energy—and this makes the atoms (by which they mean the parts that are not mobile) vibrate. On the basis of the picture of resistance previously supplied, it is not at all clear why merely vibrating should make the atoms obstruct electron flow 100 times more at 400°K than at 20°K, but that is one of the places where the unconvincingness of the simple theory made people look for something better.

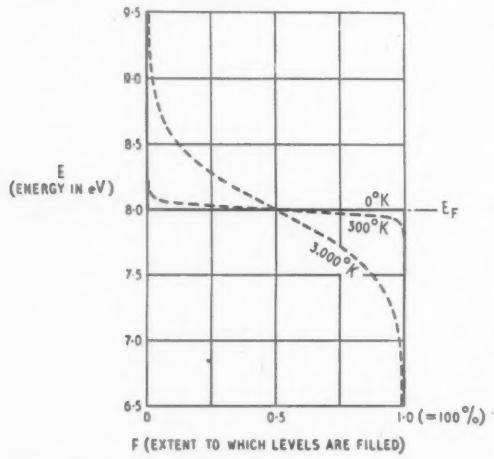

Fig. 3. Fermi distribution function plotted for three different temperatures, showing how only the highest-energy levels in Figs 1 and 2 are appreciably disturbed even by quite fierce heat.

Wave mechanics is the something better. Unfortunately, although it accounts for resistance mathematically, it doesn't give us a clear mental picture of what is going on. That is because it is obliged to depart from the idea of electrons as just small particles and credit them with a wavelike nature. Such waves can be propagated freely through a structure which is exactly periodic, such as a perfect crystal at 0°K; in other words, under the influence of an e.m.f. the valency electrons can flow through the solid without resistance. But when the spacing of the atoms is thrown into irregularity by heat vibration there is an interference between the electron waves and the atoms whereby the electrons are continually having to give up the extra energy supplied to them by the e.m.f. This energy appears as heat, as the cat knows when it makes for the electric fire. The dissipation of this heat brings the electrons down to lower energy levels, so they don't all get stuck at the top of the band as one might have feared on first looking at Fig. 2. The irregularity, and hence the resistance, increases with temperature; which agrees with experience.

The resistance of substances that are not good conductors *falls* with temperature, usually very steeply. Their resistance, being so great, is hardly accounted for at all by the heat vibration of the atoms. But of course heat supplies energy to the electrons as well. It used to be supposed that the electrons in an atom began with no energy at all at absolute zero, and all shared the increase as the temperature was raised. But this led to conclusions at variance with experimental results. Nowadays, our energy-level diagrams and Pauli's principle show where the supposition was wrong and why the experiments turn out the way they do.

The Fermi Curve

Let us begin at 0°K, with the valency or "free" electrons distributed in the energy diagram like water in a well. Below the surface—which represents the highest occupied energy level—all levels are completely filled; above it there are no electrons at all. This condition is represented by the full line in Fig. 3, which shows that up to a certain level (marked E_F) all the energy levels are 100% filled, and above it they are all completely empty. Note that although the temperature is zero they all have quite considerable energy, for true zero energy (as distinct from our arbitrary zero at the well's mouth in previous diagrams) is right below the minimum of the scale shown. As regards kinetic energy, they are reckoned to start with zero at the bottom level, and work up to several eV at the surface.

Now impart a little heat. The nearest unoccupied levels are above the surface, so the only electrons in a position to receive small gifts of energy are those at or near the surface. Those near the bottom hardly have a chance, any more than drops of water at the bottom of the ocean are likely to spring up through the surface when they are gently stirred. This condition is represented by the first dotted line, which shows that levels just above E_F are partly filled with electrons drawn from levels just below, which are therefore incompletely filled. Practically half of those right at the surface are raised just above it, but the proportion falls off very rapidly as the energy distance from the surface increases. The chance of an electron being raised far does exist, but at low temperatures it is very small indeed. It is like the chance of winning a big prize with a small stake—only still slimmer.

At high temperatures the energy is such that a

(*Continued on page 281*)

few electrons are raised from fairly low levels and some are raised well above E_F. The number of electrons involved in even a small piece of stuff is so enormous that one is not interested in the doings of any particular individuals but only in their averages. There is a tendency nowadays, fostered by the lay Press, to think of statistics as something to do with individuals; but in scientific matters they concern only calculations in which individuals are ignored. For instance, no one can be sure of the result of fairly tossing a coin, or even half a dozen; but the result of a million throws can be predicted with considerable accuracy. That is because purely random events follow *statistical* laws.

By making assumptions based on the principles we have been studying, two scientists named Fermi and Dirac independently calculated how energy would on the average be distributed among the free electrons in a solid. The result of their effort, called Fermi-Dirac statistics, is expressed by

$$F = \frac{1}{\exp^{\star}\left\{\frac{E-E_F}{kT}\right\} + 1}$$

where F is the filling factor at energy level E, k is Boltzmann's constant (which we ran into when considering the related subject of circuit noise) equal to 8.6×10^{-5} eV/deg, and T is the absolute temperature (°K). The curves in Fig. 3 were plotted from this equation for T = 0, 300° (= 80°F), and 3,000°. E_F is not necessarily at the 8eV level; it differs according to the material, but 8eV is typical of a metal. Wherever it is, it is called the Fermi level.

All this may seem to be getting highly involved and far from the subject, but actually it concerns it very closely, as you will see if you go back to Fig. 1. So far as ordinary electric fields are concerned, any clear gap between filled and empty band is a complete barrier, so at 0°K the material (if pure) is a perfect insulator. But at any other temperature some electrons have enough heat energy to take them across the gap. If the gap is large and the temperature low, the number is fantastically small. Suppose the gap is 2eV; then even at 300°K, which is a warm summer temperature in Britain, the proportion of electrons able to cross it is only 1 in 7.8×10^{35}, or about 1 per ten million cubic yards of material! So it would be no good trying to measure the leakage with a Megger! But if the gap were 0.1eV the odds would shorten startlingly to 1 electron in 9,700, which represents considerable conductivity. At 3,000°F, even the 2eV gap is crossed by 1 in 44,600, which would be enough to ru'n it as an insulator even if it could stand such a temperature without going up in smoke.

These Fermi-Dirac calculations† agree very well with the steep decrease in the resistance of insulators and semi-conductors as the temperature is raised. Some materials such as diamond remain good insulators up to quite high temperatures, and one can guess that they have large energy gaps. Pure silicon conducts very little at room temperature, but much more than a good insulator should, so its gap is presumably less. Germanium is a middling conductor at room temperature. And tin, of course, conducts quite well. Note that all four of these materials are elements in the same column of the Periodic Table, since all have four valency electrons per atom; they were mentioned in order of increasing atomic number, and evidently decreasing energy gap. The reason why silicon transistors are better than germanium for working at high temperatures is now clear: the energy gap in germanium atoms is narrow enough to allow too many uncontrolled electrons to cross it with the assistance of heat energy from about 60°C (333°K) upwards. For comparison with Figs. 1 and 2, Fig. 4 is the energy-level diagram for a semi-conductor (strictly, as we shall see later, an *intrinsic* semi-conductor); the gap is narrow enough to be crossed by an appreciable number of electrons with the aid of moderate heat.

It would be quite wrong to interpret a Fermi curve as representing a static situation. Electrons that have been given excess energy tend to get rid of it again at once—well, after about a hundredth of a microsecond—whether that excess was conferred by radiation or electron bombardment or heat. A little piece of hot stuff left out in the cold cools down. The man in the street (provided he didn't misunderstand altogether the nature of the subject under discussion) would probably greet such a statement with mock incredulity, but would he be able to explain why it doesn't stay hot? Each Fermi curve represents a constant temperature, but in order to maintain anything at a constant temperature—even a very low temperature—it is necessary to keep on supplying it with heat to push its electrons up to higher energy levels at the same rate as they are dropping back. Even an object in a uniformly cold room is in a continual state of turmoil, receiving heat energy from its surroundings and giving it back. Consequently the room is full of heat energy in transit—radiated energy—even though by domestic standards it would be judged cold. The Fermi curve for that temperature shows that most of the energy transitions are very small—electron-millivolts rather than volts—and by use of the quantum law ($E=hf$) we know that this means the radiation frequencies are low; far down in the infra-red. If the room were a furnace at a uniform temperature of 3,000°K, Fig. 3 shows us that an appreciable number of the transitions would be of the order of electron-volts and therefore in the visible part of the spectrum. Our man in the street would again consider it excessively obvious that things in such a furnace should be white-hot, but again would he be able to explain why? Indeed, it was a great puzzle to



Fig. 4. Energy-band diagram for an intrinsic semi-conductor, in which the gap is about 1eV or less, so can be crossed by a small proportion of electrons if they are stimulated by heat or other external source of energy.

* "exp x" is a more convenient way of writing e^x when x is a rather elaborate expression as here.

† The figures just given are obtained by calculating the area below the appropriate Fermi curve in Fig. 3 above an E level higher than E_F by the amount of the gap mentioned, in comparison with the total area below E_F. According to the full theory, the energy bands below E_F hold progressively fewer electrons, so the area below E_F was calculated as equivalent to the full width extending only 5eV downwards.



Fig. 5. An electron has the greatest chance of being emitted if the velocity given to it by heat is at right angles to the surface, as here.

scientists up to the turn of the century, for the frequency distribution of radiation under the conditions of heat balance we have been considering couldn't be accounted for by nineteenth-century physics. It was, in fact, mainly this difficulty that led Planck to break away with his startling quantum theory.

If you are thinking this is going right off our subject just as we were getting warm with the mention of transistors, you could hardly be more wrong. Transistors are all very fine, but we are likely to need thermionic valves and cathode-ray tubes for quite a while yet. And what use would they be without emission?

It should be clear by now that if the temperature is high enough, and the Fermi level not too far down the "well," an appreciable number of electrons will get right away from the atoms. That is to say they will be released from the material and able to soar through space on their own. This is precisely what is designed to happen at the surface of a heated cathode. What is done with those electrons after they have been emitted we all know. We know, too, that the emission increases very rapidly with the temperature of the emitter—the cathode. Does Fermi help us here? As a TV interviewee would say, he does indeed. But a little thought is required.

One might suppose, for example that all one had to do was to use the formula to calculate the proportion of electrons which receive sufficient extra energy to cross a gap equal to the depth of the Fermi surface from the top of the well. (This gap is better known in scientific circles as the "work function," denoted by ϕ.) The fallacy is the quite wrong assumption that the energy given by heat to an electron would necessarily give it velocity perpendicular to the surface, as in Fig. 5. There is no reason why it should aim in this direction more than any other. Those moving at an angle to the perpendicular need a higher velocity to carry them into the open against the potential barrier at the surface. One can picture the piece of solid as a level "Dodg'em" car arena, with sloping banks (their height representing ϕ) all round the boundary. The cars are dashing about in all directions, and whenever they reach the boundary they are reflected back by the slope. But if someone turns up the voltage of the supply to the cars (representing heating the solid) some of them may get up enough speed to charge right up the bank and fly out of the arena. Clearly those approaching the bank at right angles are most likely to do so.

Fig. 6. Showing how steeply the emission of electrons increases with quite a small rise in temperature. This is a theoretical curve; in practice the emission is less, but the curve has the same shape.

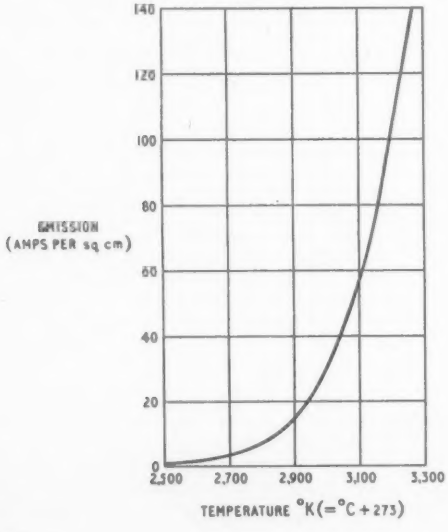

To derive from Fermi statistics an equation for the number of electrons leaving a surface at temperature T°K is not so easy as it might look; the result known as the Dushman (or sometimes Richardson-Dushman) equation is:

$$I = \frac{AT^2}{\exp \frac{\phi}{kT}} \quad (\text{or } AT^2e^{-\phi/kT})$$

where I is the emission current in amps per sq. cm. A is a hold-all for a collection of fundamental constants; it is equal to 120. In practice the current is less, and is often very much less, because even a single layer of impurity atoms at the surface creates an additional impediment. The important thing to notice is that the exp ϕ/kT factor is the same as in the original Fermi function (ϕ being the gap between the Fermi level and outer space), and it is this factor that dominates the situation, representing such a large change of emission for a small change in temperature that T^2 makes very little difference. The work function, ϕ, varies from about 1.8eV for caesium to 5 for nickel. Tungsten has quite a high ϕ—about 4.5—so it has to be heated to about 3,000°K for a useful emission; see Fig. 6. That is why tungsten filaments are run white-hot. You can see from the equation that if ϕ is halved the cathode temperature required is also halved (and the power needed to heat the cathode is much more than halved), so you may be wondering why tungsten is ever chosen. Although many other metals have lower ϕ, advantage cannot be taken of this because they would melt even at the lower temperature required for emission. However, certain oxide coatings reduce ϕ considerably, and make possible the low temperatures at which the cathodes of receiving valves are run. But they are too delicate for large transmitting valves.

As we have seen, heat is not the only way of imparting energy to electrons. One can do it with radiation. Using the by-now-familiar quantum relationship between energy and frequency, we can easily calculate the lowest frequency the radiation must have to provide enough energy to overcome ϕ. Take tungsten, with its $\phi = 4.5$eV. The frequency having at least this amount of energy is $\phi/h = 4{\cdot}5/(4.13 \times 10^{-15})$ c/s = 1,090 MMc/s. This is well above

the highest visible frequency, so ultra-violet radiation is needed to extract any electrons from tungsten.

Other Causes of Emission

The corresponding figure for caesium is 436 MMc/s, which is just about the lowest visible frequency. So light of any colour has enough energy to stimulate emission from caesium; hence the use of this metal for cathode surfaces in photo-cells.

Radiation having higher frequency than the bare minimum ejects the electrons with greater violence. You may remember it was the contradiction between this fact and the wave theory of light that I quoted at the beginning of this series (February issue) as an example of the need for the quantum theory. Planck introduced that theory mainly on other grounds, and it was Einstein who a few years later carried it a step farther with the idea that not only was radiation confined to quantities which were multiples of *hf* but that it actually consisted of what are now called photons. On this theory, raising the frequency of a given amount of radiated energy means dividing it into fewer but more energetic photons.

Although it follows that a photo-emitter will respond to radiation of any frequency above the minimum, in practice the range is restricted by whatever material is used to keep out the air (which would obstruct the emitted electrons). Usually it is glass, which is opaque to ultra-violet rays: if the cell is to be used for them, quartz is substituted.

Photo-emission is much more complicated than the foregoing outline would suggest; in particular, even now the authorities maintain a discreet silence on exactly how some of the most-used cells work—those with compound surfaces, some of which are sensitive well into the infra-red.

Another energy giver is a fast-moving electron, and you are probably familiar with secondary emission in valves, cathode-ray tubes and electron multipliers. Although it is true that electrons begin to be knocked out when surfaces are bombarded by electrons having approximately the same order of energy as that needed to overcome ϕ (say 5eV), the whole business is even more complicated than photo-emission. For one thing, you hardly expect to make a nail fly out of a piece of wood by hammering it inwards. But electrons do just that if they are hit hard enough. Less intense bombardment will extract secondary electrons if it strikes a more glancing blow. And there are all the complications due to surface impurities—intentional or otherwise. So I don't intend to enlarge on this, or on the fourth and last kind of emission—field emission, in which electrons are extracted from a metal by the brute force of an intense electric field.

Having raced at a rather undignified pace through the applications of electron energy in what may be called the glassware branch of electronics, we can now—or rather next month—go back to where we left off with semi-conductors and take up that story. Don't forget all about Fermi statistics in the meantime.

U.K. TROPOSPHERIC SCATTER SYSTEMS

MULTI-CHANNEL tropospheric scatter systems can satisfactorily provide a point-to-point transmission of signals over distances of 200 miles or more as compared with the 40-mile average of direct-beam systems. Although in some cases it may be more expensive, the tropospheric scatter method holds out great possibilities over routes where intermediate repeater stations are impracticable, as over desert or long expanses of water.

Aerial and transmitting building of the tropospheric scatter station built by Marconi's at Start Point. The aerial is 30ft in diameter.

For some years now Marconi engineers have had an experimental tropospheric scatter system operating between Bromley in Essex and Catterick in Yorkshire, mainly for analysis of the transmission characteristics and to provide data for systems planning.

A multi-channel radio link has now been inaugurated between Start Point, Devon, and Galleywood, Essex, a distance of just over 200 miles. This operates on a frequency of 858Mc/s and is single-way with the transmitter situated at Start Point and the receiver at Galleywood. At present the equipment is designed for a maximum of 60 simultaneous telephone channels, but later television pictures will be transmitted over the link to ascertain whether an acceptable standard of quality can be realized.

The Start Point transmitter employs a water-cooled four-cavity klystron developing an output power of 10kW. The associated aerial system, a 30-ft diameter paraboloid "dish" excited by a horn radiator, is mounted with its centre 35ft above ground level. This aerial has a gain of 36dB over a dipole at 858Mc/s and thus provides an effective radiated power of the order of 40 megawatts in the direction of maximum intensity.

The receiving equipment at Galleywood is of the dual diversity type employing two dish aerials each of 30ft diameter and spaced 100ft apart. This method does much to counteract the effects of rapid fading of the signals which is a characteristic of tropospheric scatter propagation.

Instruments, Electronics

THINGS SEEN AT THE INTERNATIONAL EXHIBITION

Muirhead facsimile picture tape recorder.

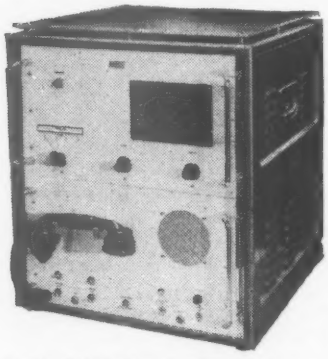

Racal TRA55 60-watt transmitter-receiver, showing the simplicity of controls.

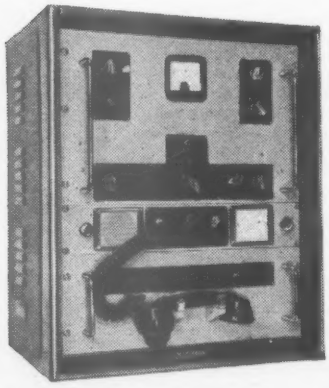

Redifon GR400 60-watt transmitter-receiver, using a novel form of transistorized modulator.

AT THE conclusion of last year's first I.E.A. exhibition there was general agreement that it had fully justified its existence and could usefully supplement older established functions in this sphere.

This year the scope of the exhibition has been extended, and the strong support which has been forthcoming from Continental and American firms and their agents has established its international character. Not the least welcome difference from last year is the significant increase in the number of firms exhibiting communications equipment, from which electronics borrowed many of its methods and to which it has paid back many new ideas.

Communications

Perhaps the most important item in this field at the exhibition could be reported colloquially in two words —"Fax taped."

The tape-recording of facsimile picture transmissions might seem to be an easy process because the range of frequencies handled is no more than the normal communications audio range. In actual practice the difficulties are manifest mainly as tape "drop-outs," wander in playback speed and tape's terrible twins —wow and flutter.

Muirhead's facsimile picture recorder registers on standard ¼in magnetic tape at 7½in/sec, the output from a facsimile transmitter (rotating drum equipment) and enables it to be stored until conditions are suitable for transmission. To overcome "drop-out" and very-low-frequency equalization problems the 0 to 3kc/s picture information is used to frequency-modulate a 5-kc/s carrier, deviating it by ±4.9kc/s. This is recorded on a half-tape-width track, the other track carrying a 1000-c/s reference tone generated by an internal oscillator which is also used to drive the capstan motor. On playback the f.m. carrier is subjected to a high degree of amplitude limiting, which overcomes "drop-out" problems, and the 1kc/s reference tone is compared with that of the local oscillator driving the capstan motor, a.f.c. being applied to the oscillator to maintain tape speed at its correct value. Wow and flutter are taken care of by the use of a tape-deck of the highest professional quality. Reproduction of the recorded picture was in fact, indistinguishable from a direct transmission between two conventional facsimile machines.

R/T and c.w. transmission and receiving equipment was well represented. Miniaturization—as in all electronics—was a prominent feature. One example of this was a 3-watt u.h.f. transmitter receiver (D103) on the W.S. Electronics stand. The D103 is designed for use direct from the aircraft 28V main supply, or from an independent 24V emergency battery. The amplitude-modulated crystal-controlled transmitter provides two channels within 1Mc/s of each other in the 238 to 248Mc/s band. Speech clipping is provided and the "transmit" side tone is taken from a crystal diode detector loose-coupled to the aerial socket, giving a valuable pre-flight and in-flight check of transmitter serviceability.

Another miniature equipment in rather a different class was shown by Microwave Instruments. This is the RT10 transmitter-receiver for marine use, providing ten crystal-controlled channels (including the 2.182Mc/s distress frequency) in the 1.6 to 3.8Mc/s band. Only four valves are used in the transmitter which obtains its power supplies (and provides those for the receiver) from a 12 or 24V d.c. supply by vibrator pack. The receiver has a ferrite rod mounted on the top of the cabinet for d.f. and covers 150kc/s to 4.0Mc/s with a break for the i.f. It uses 1.4V valves and can be operated from dry batteries when not used with the transmitter. The transmitter output claimed is seven watts, and the power input is about 45 watts. Weight 21lb. Overall dimensions 15in × 8¾in × 8½in.

Siemens Edison Swan had on show a transistorized telephone carrier system junction unit primarily designed for use with multi-channel radio links. A master crystal oscillator running at 16kc/s is the basic timing unit for all five channels, con-

and Automation

HELD IN LONDON AT OLYMPIA (16-25 APRIL)

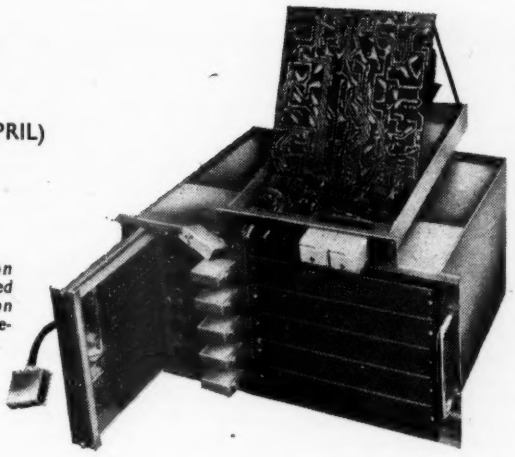

Siemens Edison Swan transistorized carrier junction equipment for telephone radio links.

trolling the frequency of the 4-kc/s spaced carriers and the out-of-band signalling circuits for each channel. The unit is suitable for rack mounting in the standard 19in rack, and the complete five-channel equipment is 8¾in high. Power consumption is only 7½ watts from a.c. mains, or a 24V d.c. supply.

Two firms—Racal and Redifon—had on show broadly similar transmitter-receivers. These equipments have so many similarities that the common features are listed for both units. Both give 60W output, single sideband suppressed carrier a.m. radio telephony or c.w.; provide four crystal controlled frequencies in the 3 to 12Mc/s band; can be matched into a coaxial-line-fed or open wire radiator; run from a.c. supplies of 100-125V and 200-250V at a nominal frequency of 50c/s, and consume about 300W whilst transmitting; use the same output valves —Mullard QV06/20 (or the American equivalent). Even the cubic content of the case (within a few per cent) is the same. It is only by probing deeply into these two equipments, in fact into the modulator sections, that a difference can be found.

Racal TRA55: This employs the "filter" method of single-sideband suppressed-carrier generation. In this a balanced modulator (push-pull to a.f., push-push to r.f.) is used to generate a double-sideband suppressed carrier signal on a basic frequency of 1.4Mc/s. This is then passed into a crystal filter which attenuates the unwanted sideband by about 50dB.

The s.s.b. signal so obtained is passed to a second balanced modulator where it is brought to the r.f. required by mixing with the output from a master crystal oscillator. All the crystals on which the transmitted frequency depends are kept at constant temperature in a small oven to ensure frequency stability. On "receive" the incoming signal is amplified at r.f., converted to 1.4-Mc/s i.f. and passed through the filter, then into a "product" or heterodyne detector (after suitable amplification). About 20dB of speech clipping is provided in the modulator a.f. amplifier and the number of controls has been reduced to a minimum so that the equipment can be used by non-technical personnel.

Redifon GR400: Here a radical departure from the well-known methods of s.s.b. transmission generation occurs (see diag.). The extremes of the audio band are limited to 300 to 3300c/s. The outputs from the first balanced modulators consist of two "sidebands" of 0 to 1350c/s and 1950 to 4950c/s with a 90° phase difference between them. The 1950 to 4950c/s band is removed by an LC filter, leaving the 0 to 1350c/s band which is passed on to a second pair of balanced modulators, fed from a 463.35kc/s oscillator. The radio frequency outputs from the second pair of balanced modulators are thus lower side bands of a 465kc/s carrier (which is never generated) containing equal amounts of direct and inverted modulation (direct and inverted in frequency

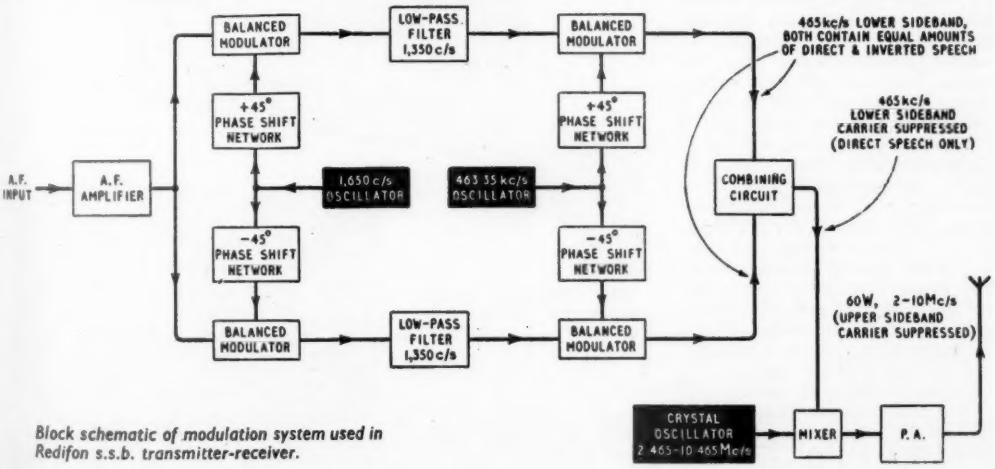

Block schematic of modulation system used in Redifon s.s.b. transmitter-receiver.

spectrum), with a 90° phase separation. These outputs are combined in such a way that the inverted spectrum cancels out, leaving a 465 kc/s lower sideband suppressed carrier signal. It will be seen that, at every stage, if a breakdown or tampering with preset adjustments occurs, the unwanted sideband cannot be generated—a carrier is produced in the middle of the channel in use, and not in another user's channel space. On "receive" the modulator chain converts the signal back into a.f. information.

Obviously a modulator of this type, with many stages, would use a considerable amount of power for valve heaters alone. This problem is overcome completely by using transistors throughout. The a.f. amplifier and output stage, microphone amplifier and modulator all use transistors. (8 of OC71, 5 of OC45 and one V15/30P.) A development modulator, using thermionic valves, consumes about 30W of input power—the transistor modulator in the GR400 consumes only one hundredth of this amount—roughly ¼ watt.

Industrial Electronics

As automation in industry increases so does the ingenuity of some workers in trying to obtain spuriously high counts of work done. This, explained Burndept, was the problem they had to overcome in designing a new press output counter. With an optical device oil and dust can interrupt the light beam and prevent correct operation. So a new method of producing a pulse to work the counting mechanism had to be found.

The piece-part is removed from the mandrel and blown down a glass tube by compressed air. This tube passes through a box containing the sensing element, which is a coil wound round the tube. In the top of the box, which can be locked to prevent unauthorized tampering, is a crystal oscillator, using the coil as the second tuned circuit. The oscillator is operated on the "knee" of the valve curve, so that the passage of the object through the coil causes a large anode current pulse. To prevent scrap material thrown into the tube producing a spurious count this pulse is applied to a flip-flop with a paralysis time equivalent to the minimum interval between two successive articles when the press is operating at maximum speed.

A versatile counter which can also be used as a frequency meter, chronometer, pulse frequency divider and pulse delay generator was shown on the Racal stand. Using transistor-driven magnetic-core counter circuits, it is extremely compact (13in × 9in × 12in) and displays its results on four of the new numerical indicator tubes (see page 273). As a totalizer the instrument will count up to 9999 then reset to zero and carry on in this manner indefinitely. Frequency is measured by counting cycles over a period of time which can be set from 1msec to 10 seconds in 1-msec steps. Used as a chronometer the equipment counts units of time between "start" and "stop" signals applied to it. Any input frequency up to 10kc/s can be divided by any factor from 2 to 10,000. For pulse delay purposes the required delay is set up on the instrument, the initial pulse is applied to the "start" terminal and after the delay interval an output pulse is produced.

Kelvin-Hughes exhibited what is almost a model servo-system on a "force/balance" type of aneroid pressure-indicating device in which the pressure capsules are coupled to a pivoted beam and are balanced by a spring in tension. The end of this beam is used as the moving element in a differential transformer. When a change in pressure occurs the beam is deflected, causing an out-of-balance signal from the transformer, which, after passing through a transistorized amplifier is used to drive a motor geared to a lead screw. The balancing spring is attached to this screw so that the beam is returned to its original position, the angular displacement of the lead screw (proportional to the change of pressure) giving an indication on a dial geared directly to this spindle, or arranged as a remote repeater.

Another item commendable for its neatness on the Kelvin-Hughes stand was a miniature slip-ring assembly primarily designed for carrying leads to sensing devices on a rotating member. Only 1¼in long and using a spindle 0.2in in diameter, this slip ring assembly provides 22 separate contacts capable of withstanding a flash-test of 1kV between adjacent sections. Other types with a smaller diameter spindle and fewer contacts are available.

Thickness gauges using radiation sources are well known, but worthy of note in this field is a set of three gauges produced by Ekco for use with their N565 indicator (this is a large-scale valve voltmeter using "chopper" technique and providing an input impedance of $10^{10}\Omega$). In each instrument, the radiation passing through the specimen impinges on a phosphor screen, the scintillations being detected by a photomultiplier tube. The tube's output is applied directly to the indicator.

Between the end of the range of materials light enough to be measured by α techniques and dense enough to be measured by β techniques there is a gap. This gap in the nucleonic "ruler" has now been filled by one of the Ekco gauges using strontium 90 as a source of β radiation to excite Bremsstrahlung for use as the measuring radiation, allowing the measurement of metal films between 0.02in and one inch thick. Each of these Ekco gauges in-

(*Continued on page* 287)

Above: Integrating personal dosimeter ("Monitor") by Radiatron.

Racal counter/chronometer using transistors and magnetic cores.

corporates an automatic standardization feature. Variations in the high voltage supply and temperature can cause inaccurate results, so, after a predetermined interval (usually five minutes) operation of the gauge is stopped for ten seconds or so, and the head is exposed to radiation from a standard source. Servo-mechanisms then make adjustments to the gauge circuits to correct any drift which may have occurred.

Personal safety in the presence of radiation is a factor receiving ever-increasing attention. A personal dosimeter giving audible warning when the danger level has been reached was shown by Radiatron under the name "Monitor." This instrument, of German origin, uses the current passed by an ionization chamber to charge an electrostatic relay. When this relay has charged to a sufficient potential to close, an audible warning is set off. It will be seen that an integrating action is achieved which sounds a warning when the total dose exceeds 30 milliröntgens—the maximum allowable weekly dose under the present regulations. The high voltage for the ionization chamber is developed by a transistor oscillator and stored on a capacitor. The equipment is powered by a small rechargeable battery, and it is supplied complete with a small β radiation source for calibration and testing. The weight is 350 grammes and the measurements are about $4\frac{1}{2}$in × $2\frac{3}{4}$in × $1\frac{1}{2}$in overall.

Chemical analysis was represented by a wide range of electronic instruments in which the electronics in many cases only amounted to a standard detector, like a photocell or radiation counter, coupled to a standard measuring or indicating instrument. There were, however, other instruments in which electronics played a more essential part. A nuclear magnetic resonance spectrometer shown by Fairey Aviation was one interesting example. Although this method of analysis (see May issue, p. 219) is now about twelve years old, the Fairey spectrometer is interesting because it takes the form of a very compact bench-type instrument designed with an eye to incorporation in process control systems. Hitherto such apparatus has been somewhat bulky and essentially for laboratory use. The compactness of the Fairey instrument is mainly the result of using a small permanent magnet with 4-inch diameter poles, a pole gap of 0.72inch and a field of just under 4,200 gauss. This is incorporated in the main body of the instrument and samples for analysis are inserted through an opening in the front control panel. The output signal, representing the absorption which occurs at resonance for particular atomic nuclei, is displayed on a separate pen recorder, the chart movement of which is linked to the magnetic field sweep system. In the prototype machine on show the resolution of the spectrometer was about 5 in 10^7 but the production model is stated to be capable of 1 in 10^7.

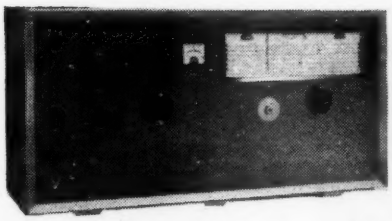



Fairey nuclear magnetic resonance spectrometer.

Right: Sefram galvanometer recorder.

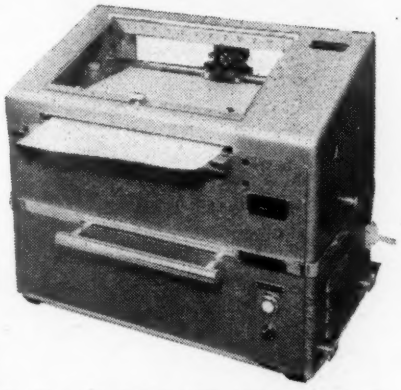

Measuring and Test Instruments

Current and Voltage Measuring Equipment.—The high possible overload factor of 30,000 in galvanometers with sensitivities as high as 1.6×10^{-3} μA/mm is a feature of several ranges of Sefram instruments shown on the French C.O.M.E.F. manufacturers society stand and imported into this country by Dobbie McInnes. An important part of the design is the suspension of the coil in liquid of the same mean density.

A galvanometer recorder which records on an 8-in-wide paper chart the deflections of an external mirror galvanometer was also shown by Sefram. Called the Photodyne, it is essentially a light-spot follower device and uses a high-performance servo system capable of an acceleration up to 13ft/sec/sec and a writing speed up to 24 inches/sec. The light spot movement is followed by a differential photoconductive cell on a carriage which conveys the recording pen and ink reservoir. This carriage slides along a rail transversely across the paper chart. The output from the cell is amplified and controls a servo motor which drives the carriage in such a way that any difference in output between the two halves of the cell is reduced to zero—in other words the photoconductive cell is kept centred on the moving light spot. By means of this instrument it is possible to record voltages down to 20μV and currents down to 0.01μA at full-scale deflection.

In the Racal digital test meter SA75 the time taken for a highly accurate ramp waveform to reach the level of the input voltage is crystal counted. The peak ramp voltage is also compared with a standard, the difference being fed back to give the correct rate of rise regardless of drifts in the ramp circuit component values.

Two inputs are provided in the Metrix E.R.I.C. multi-meter[5], one, with an input resistance of $10^{14}\Omega$, providing unit gain impedance conversion, is used basically for voltage measurements; the other, with a very low input resistance and providing a current gain of up to 10^6 times, is used basically for current measurements down to 10^{-13}A. The output impedance is also very low so that

Agents in U.K. for foreign instruments: (A), Aveley Electric, Ltd., 15-16, Ayron Rd., Aveley Industrial Estate, South Ockendon, Essex; (L), Livingston Laboratories, Ltd., Retcar St., London, N.19; (S), Solartron Electronic Group, Ltd. (Merchandising Division), Queens Rd., Thames Ditton, Surrey; (W), Wykeham and Co., Ltd., 17-19, Cockspur St., London, S.W.1.

Left: Tektronix [L] 575 transistor curve tracer.

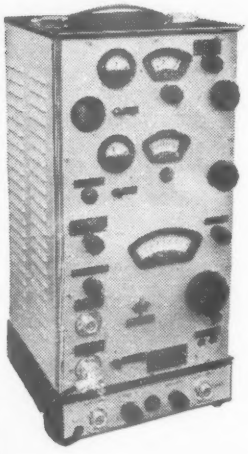

Schomandl [S] FDI crystal controlled frequency meter for measurements up to 920Mc/s.

Rohde and Schwarz [A] Z-g diagraph.

an ordinary milliameter or recorder indicator can be used.

Impedance Bridges.—Measurements are made in terms of magnitude and phase angle by comparison solely with resistances in the Radiometer[L] GB6. The magnitude is measured by equalizing the a.c. voltages across the unknown impedance and a variable resistor in two of the arms; and the phase by equalizing the voltages across a bridge diagonal and a variable fraction of one of the two other 500Ω arms.

The British Physical Laboratories CB181, working on the principle described by Lynch in *Proc.I.E.E., Part B*, for July 1957, measures capacities at 1Mc/s against changes in a standard in a method which is independent of strays at either capacity terminal. A 100kc/s bridge for checking ceramic capacitors according to R.C.S. 133B was also shown by B.P.L. (C.B.171).

Sources and detectors are now available for the Wayne-Kerr tapped transformer v.h.f. (5-250Mc/s) admittance bridges, the source outputs being compensated for changing bridge insertion loss and detector sensitivity over the bridges' ranges.

Audio and R.F. Oscillators.—Sine waves in the very wide range of 10c/s to 30Mc/s are obtained in the Wandel and Goltermann[S] MG-64 using an RC and LC oscillator below and above 1Mc/s respectively. An example of a number of small-size generators with an upper limit of about 1Mc/s is the American Waveforms[L] 510B for the sine waves. Sine or square waves, or square pulses as short as 0.25μsec at frequencies from 15c/s to 200kc/s may be obtained from the versatile Philips GM2314.

More specialized instruments shown included the E.M.I. S.R.O. 2A motorized sweep oscillator source for vibration generators covering up to any of five decades from 1c/s to 100kc/s; and the Radiometer[L] HO12W for measuring sound distribution. This latter is a b.f.o. with fundamental frequencies at about 200kc/s producing sine waves up to 40kc/s which can be frequency modulated. The output can be "clicklessly" disconnected at a speed of 600dB/sec for reverberation time measurements.

V.h.f. Signal Generators.—The wide range of 10kc/s to 110Mc/s is available in the Radiometer[L] MS111 (for a.m.). An output constant within ±3dB is obtained without any continuous level control because of the small frequency variation of 1.2 to 1 in each sub-range. In the Airmec 204 (for a.m. or f.m.) the ranges from 20Mc/s to 320Mc/s are obtained by frequency doubling, whereas the range from 1 to 20Mc/s is obtained by mixing the 40 to 80Mc/s output with a fixed frequency. In the Advance 60 (also for a.m. or f.m.) the frequency range of 4Mc/s to 230Mc/s is obtained by amplification from a Colpitts oscillator.

Crystal-controlled Decade Generators.—Very high accuracies can, of course, be achieved in such devices. In the Schomandl[S] units a variable frequency oscillator is phase locked to a single 100kc/s crystal at frequencies separated by a fixed interval. Frequencies which are not phase locked are obtained using an additional continuously tuneable oscillator. In the FD3 the fundamental frequency range extends to 1,000Mc/s and harmonics are usable up to 30kMc/s. An unknown frequency may be measured by mixing with the standard, beats being indicated aurally or by magic eye.

In the Rohde and Schwarz[A] XZB frequencies are obtained at intervals of 1kc/s from a 100kc/s crystal by multiplication, division and addition; intermediate frequencies being obtained using a continuously tuneable oscillator. The fundamental frequency range extends up to 30Mc/s and harmonics up to the 20th are usable. A meter shows the difference between the standard and an unknown frequency to an accuracy of ±2% for differences between 10c/s and 300kc/s. The order of a harmonic being used may be found by measuring the change in the frequency difference for a known change in the fundamental.

In the Gertsch[L] FM-3 the fundamental range of 20 to 40Mc/s is obtained from the harmonics of a 1Mc/s crystal oscillator and a very accurate (±0.02%) 1 to 2Mc/s oscillator. Harmonics up to at least the 25th are usable.

Frequency Response Displays.—A mechanically swept b.f.o. transmitter and associated receiver are used in the Siemens[W] 3K211 to give a plot of the frequency response of a network from 200 to 6,000c/s on a long persistence c.r.t. Automatic alternate comparison with a standard is also possible, and phase differences may be revealed by comparison with half the complex sum of the standard and unknown. The horizontal sweep is obtained directly from the received

frequency, so that an external transmitter can be used at the end of a long line.

A similar type of display of the r.f. response is given on an 11×8-in c.r.t. in the Rohde and Schwarz "Polyskop"[A]. In this case, the frequency sweeping and switching are obtained from the mains supply. The frequency range is 0.5 to 400Mc/s and the sweep width from ±0.2 to ±50Mc/s.

Phase and Reflection-coefficient Display.—Microwave techniques are applied from 30 to 300Mc/s in the Rohde and Schwarz[A] Z-g diagraph type ZDU. The reflection coefficient is found by comparing at an i.f. of 10.3Mc/s samples of the power (obtained from directional couplers) in two lines, one line being terminated by the unknown impedance and the other a standard representing unity reflection coefficient. The reflection coefficient is shown on a circular chart by radial deflection of the light spot from a mirror galvanometer. The phase of the reflected signal is measured by limiting the standard and unknown i.f. outputs and applying them to the opposite ends of another line shaped as a nearly complete circle. Standing waves are produced in this line with a minimum position determined by the phase angle. This minimum is measured by a rotating probe which is mechanically coupled to the chart so that the light spot then indicates the correct phase as an angle. The local oscillator follows small variations in the input frequency so this need not be especially stable.

Transistor Testers.—Pulses with a duty cycle of one in ten are used in the Marconi TF1272 to allow non-destructive overload current and voltage measurements to be made simultaneously. In the new Microcell 108 a variable frequency (1kc/s to 3Mc/s oscillator is provided for measurement of the grounded-emitter current gain cut-off frequency. About the same size as and looking rather like an ordinary oscilloscope, the Tektronix[L] 575 allows the display from zero of literally almost any two transistor parameters against variable steps in a third. The display may be limited by a number of alternative load-lines.

Oscilloscopes.—An inexpensive storage oscilloscope shown by Wandel and Goltermann[S] uses crystalline potassium chloride on a mica film backed by a semiconductor as the storage screen inside the cathode-ray tube. The electron beam converts potassium ions into atoms which form blue colour centres which can remain visible for days. The trace can be erased within 20 secs by the heating action of current passed through the semiconductor. The frequency range is 0 to 10kc/s.

A number of Tektronix[L] oscilloscopes were shown. The 536 is used for tracing the relationship between two inputs, and so has no time base. The X and Y d.c. amplifiers have a rise time of 35mμsec and a relative phase shift of not more than one degree at 15Mc/s. The 551 is a double beam d.c. oscilloscope with the fast rise time of 12mμsec and the wide sweep rate range of 0.02μsec/cm to 12sec/cm. The wide variety of triggering arrangements include an automatic setting for signals from 60c/s to 2Mc/s. A feature of the 535 is the possibility of delaying the sweep from 1μsec to 0.1sec, with a time jitter of less than 1 part in 20,000, to examine part of a complex signal.

Oscilloscopes developed especially for testing television transmission equipment were shown by Faraday Electronic Instruments and Marconi. In the Marconi TF1277 the time base can be triggered by the frame sync pulse and delayed to permit examination of individual lines. It can also be expanded up to 50 times. Parts of the waveform away from the zero level can be linearly magnified (windowing) to enable the black level stability to be measured to within ±1 per cent of peak white. Differential facilities enable hum to be measured as low as 54dB down on the peak signal. Hum on the earthy side of unbalanced input signals is automatically rejected by the same amount; and its effect may be still further reduced by clamping the input signal at the black level or sync bottom.

Microwave Equipment.—Wideband 3cm reflected power display equipment was shown by the G.E.C. The frequency of a "Carcinotron" backward wave oscillator is swept using the mains supply from 20Mc/s up to 7,500 to 11,000Mc/s as required; its output being stabilized by sampling a fraction from a directional coupler and feeding it back to the "Carcinotron" grid. The power reflected from the unknown impedance is sampled from another coupler. The display is calibrated by viewing a standard mismatch. Similar equipment is available in coaxial line for the 2,400 to 4,000Mc/s band.

A comprehensive power and frequency measuring radar test set (SGM122) and high-speed oscilloscope (SGM120/01) were part of a very wide range of wideband equipment for 3cm shown by Philips.

Computers

Digital input/output mechanisms were represented by two new developments—a punched paper tape reader by Metrovick and a fast serial print-out machine by Hollerith. The Metrovick tape reader uses photo-transistors for sensing the rows of holes across 5-channel paper tape and operates at speeds up to 250 rows per second. It has a novel type

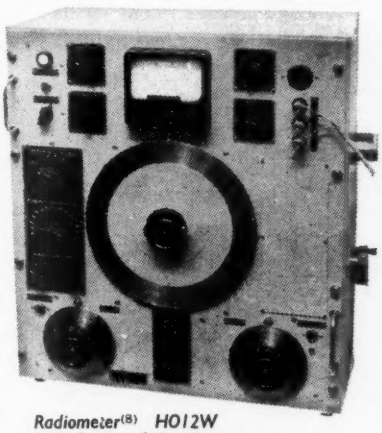

Radiometer[S] HO12W b.f.o for sound distribution and reverberation time measurements.

Metrovick punched paper tape reader.

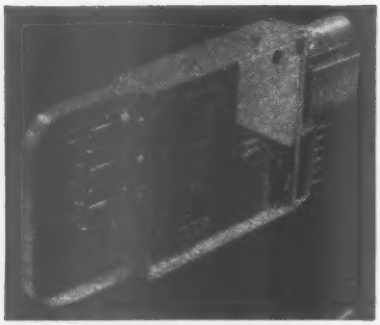

Plug-in d.c. amplifier from Short analogue computer.

of drive mechanism based on continuously rotating rollers and brake blocks, controlled by a moving-coil actuator. This actuator is in turn controlled through a transistor amplifier from the sprocket holes on the tape and from "read" pulses from the computer.

In the Hollerith experimental print-out mechanism the letters or numbers are formed in sequence on a narrow moving paper tape by means of electromagnetically-operated styli, each of which makes a dot through inked ribbon at a particular place in a rectangular frame. There are 35 styli in 7×5 formation, and by selecting suitable combinations of these any characters can be built up from the patterns of dots. The selection for particular characters is done electronically by a selenium-diode coding matrix, which sends signals to thyratrons operating the styli electromagnets. Each stylus can be operated in 3 milliseconds, and a printing speed of 160 characters per second is possible. The paper tape moves at up to 20 inches per second.

A digital differential analyser shown by the Royal Aircraft Establishment is intended to be used for simulation work on control systems in the same way as an analogue computer, but has the greater accuracy of a digital machine. It also makes possible the precise repetition of results. The basic element is a device which performs approximate integration by finite differences—roughly analogous to the principle of totalling squares on graph paper underneath a curve. Several such integrators are required for solving differential equations, and each integrator has storage registers associated with it for holding the running totals of increments which occur in the process. There is, however, only a single computing circuit, which is used in turn by the integrators as it would be too expensive to provide one for each. Because all the quantities are handled as pulse counts the digital differential analyser can generate functions of any variable and not merely functions of time as in the time-dependent analogue machine. The example on show was actually a slow computer using electromechanical relays, but it demonstrated the principle of a fast electronic version being built by R.A.E.

Analogue computing equipments are tending towards greater simplicity and cheapness to cater for the growing market of educational establishments and small firms who cannot afford large and expensive general-purpose computers. Firms are beginning to realize, in fact, that there is no point in trying to produce a truly general-purpose machine since most users' requirements are specialized or restricted to a certain field. The tendency, therefore, has been to manufacture either small desk-type machines of limited capabilities or separate computing elements from which complete equipments can be assembled on the "build-it-yourself" principle. Both Elliott and Short Brothers were showing desk-type d.c. analogue machines, the first with ten operational amplifiers and the second with four, while Solartron displayed a whole range of computing units, including d.c. amplifiers, linear and non-linear computing elements, multipliers, function generators, power and reference supplies, digital voltmeters and control and patch panels. Newcomers to the field are Airmec, who showed a console-type machine intended for the same market, and E.M.I., whose bench-size computer is based on experience gained with control-system simulators for guided weapons. Printed circuits were a common feature of practically all the machines on show, and the system of making d.c. amplifiers as flat plug-in units, like books in a bookshelf, has become almost universal.

Materials and Components

The good electrical properties of some organic polymers (polyethylene, polystyrene, etc.) make them almost indispensible in modern electronics apart from their myriad other uses. All these polymers have, however, an outstanding disadvantage—they melt or become soft enough to "creep" at relatively low temperatures. Improvements have been made in the case of polythene by lengthening the molecule, but only to the extent that polythene is now available which will withstand a temperature of about 100°C without deterioration. The polymer type of insulant obviously has many advantages from the manufacturing point of view and a polymer which possesses reasonable electrical properties up to 500°C or so is a very valuable material indeed.

Phosphorus - nitrogen polymers with a volume resisivity of 10^8 ohm-cm at 450°C and a permittivity of 7.0 at 1Mc/s and 25°C were shown by the Royal Radar Establishment, Malvern, on the Ministry of Supply stand.

These inorganic compounds fall into two main groups—cyclic polymers of phosphonitrillic chloride and linear types. Most of these polymers have limiting temperatures in the range 500°C to 800°C. A typical linear polymer starts its life as phosphoryl chloride ($POCl_3$). This is converted to magnesium diamidophosphate, which, when heated to 600°C, polymerises, forming magnesium polyphosphate. Sodium diamidophosphate polymerises during a vacuum-drying process at 200°C. (This work was carried out by the Plessey Co., Ltd., under contract to R.R.E., Malvern.)

James A. Jobling were showing pressed glass preforms under the name "Multiform" and metallic oxide film resistors to RCS (provisional) 114. The technique of making glass preforms is mentioned in the review of the R.E.C.M.F. exhibition—it is sufficient to say here that they have many advantages over moulded glass shapes when used as bases and electrode supports for valves and cathode-ray tubes. The metallic oxide film resistors are made by coating a tin compound on to a "Pyrex" brand glass rod. This coating is fused into the glass surface forming a stannic oxide resistance element and a spiral cut is made in the fused surface until the required resistance value is obtained. Heavily silver-plated brass end caps are fitted and fired to silver bands on the end of the element, and the whole is coated with a moisture-resistant silicone varnish and baked. The noise level is comparable with a wire-wound resistor and long-term stability and initial accuracy are good.

Jobling are also producing a special dielectric glass for capacitors required to work at high temperatures.

London Audio Fair

RECENT TRENDS IN SOUND REPRODUCTION

DEMONSTRATIONS of two-channel stereophonic records using the 45/45 system were the main feature of this year's fair. The quality of reproduction was very variable, both as regards the stereophonic definition achieved and the distortions in each individual channel.

Pickups—Most manufacturers were showing new models for stereophonic records, though often only in a prototype form. These were usually designed to play 45/45 records directly, instead of using a vertical/lateral pickup and adding and subtracting the two outputs to convert them to the outputs which would be obtained with a similar 45/45 pickup.

A design method for stereo pickups, which can be used with all types of transducer, is to couple the stylus to the two transducers by two links which can swing at right angles to their length. These links are positioned at right angles to each other and parallel to the two record modulation directions. Modulation in one of the two directions should then move only one transducer owing to the transverse freedom of the connecting link to the other transducer. This method was used in the Cosmocord and Burne-Jones crystal pickups, and also the Westrex moving-coil pickup.

CQ Q-flex loudspeaker with flexing walls.

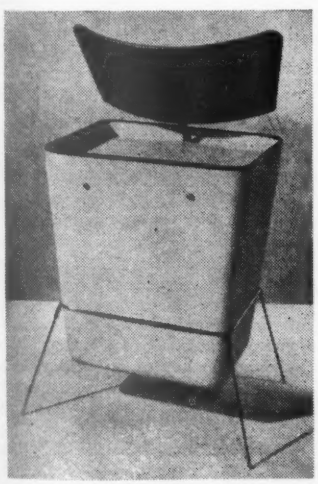

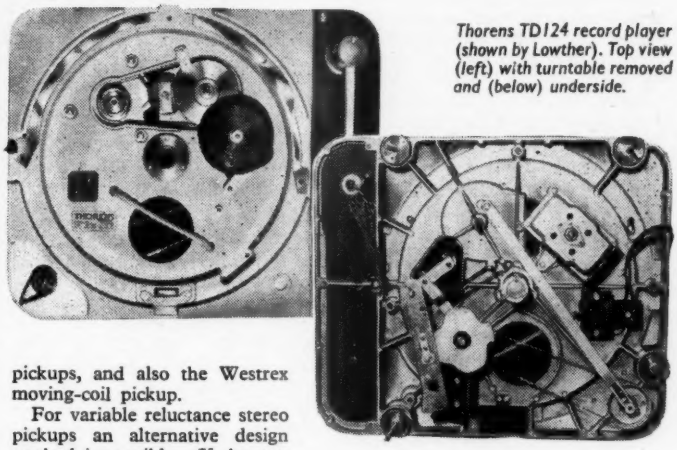

Thorens TD124 record player (shown by Lowther). Top view (left) with turntable removed and (below) underside.

For variable reluctance stereo pickups an alternative design method is possible. If the two magnet gap systems are at right angles and parallel to the two modulation directions, the moving-iron elements may be directly joined to the stylus. Modulation in one of the two directions will then alter the length in only one of the gap systems since the moving-iron element in the other gap system moves at right angles to the gap length. This method was used in the Tannoy and Goldring pickups.

A somewhat similar method is possible with moving-coil pickups where the two magnetic fields in which the two coils move are at right angles to each other. In this case, modulation in one of the two directions moves one coil at right angles to the magnetic field (inducing an output voltage), and moves the other coil parallel to the magnetic field (which does not produce any output).

The Tan II version of the Burne-Jones arm uses new point contact bearings. The pedestal mounting for the two fixed pivots has also been modified so that the maximum tracking weight now occurs at the innermost grooves where the recorded accelerations are generally greatest. The small change in tracking weight as the pickup moves across the record arises because the vertical moment of the arm and head about the suspension alters owing to the relative movement of the two linked rods.

Loudspeakers — A uniform polar response in a horizontal plane was generally favoured for stereophonic reproduction.

A reduction of the space or at least the floor area taken up by a loudspeaker is desirable if two are being used as in stereophony. If the cabinet is made taller its volume need not be decreased so much. This latter approach was adopted by Whiteley in their new square column speaker with four reflex ports at the bottom. In this system the speaker faces up towards a diffuser. An example of the more usual overall reduction in cabinet dimensions was a very small resistively-loaded reflex cabinet shown by Pamphonic.

Cabinet vibration is generally considered a serious disadvantage in a loudspeaker system. It is, however, deliberately used in the CQ Q-flex (shown outside the fair) to give increased radiation and sound source size at low frequencies. This, it is claimed, gives greater loading on the speaker and acoustic damping. An asymmetrical cabinet is used as its structural resonances are more numerous. The 9×5-in elliptical speaker and two 4-in diameter tweeters radiate upwards on to an adjustable diffuser.

Turntables and Records—There are several unusual features in the Swiss Thorens TD124 turntable shown by Lowther. The four-speed stepped pulley is not on the motor shaft but driven from it by a rubber belt. This further reduces motor vibrations

which might otherwise be transferred via the stepped pulley and rubber idler wheel to the turntable. The turntable is an 11½-lb cast-iron main flywheel which is covered by an aluminium top. This top can be raised and stopped to change the record while the iron turntable continues to rotate underneath. The weight of the iron turntable being much greater than that of the top, the correct speed is reached almost immediately the top is lowered again. A magnetic eddy current break can give speed variations of up to ±3%. The braking action is varied by a movable iron vane. Major changes of speed can be obtained by adjusting the magnet position.

There are a number of useful test frequencies on an American Sound Corporation record now being pressed in this country for distribution by the *Gramophone Record Review*. For example, a repeated glide tone from 300 to 20 c/s with markers every 50 c/s is designed for locating panel resonances and adjusting ports in loudspeaker reflex cabinets. A maximum-level glide tone from 20 kc/s to 20 c/s is useful for finding pickup resonances; whereas a normal-level glide tone from 15 kc/s to 20 c/s can be used to match loudspeakers in multi-speaker systems and also to locate any resonances in them. Residual noise can be checked from a 1,000-c/s tone recorded at 0.007 cm/sec. The advice given of using the record at dealers to reveal faults in equipment being considered for purchase is likely to lead to many surprises.

Tape Recorders and Accessories—In an exhibition where probably most of the visitors are not professionally engaged in sound recording, it is surprising how many mixers are shown. New models were exhibited by Associated Electronic Engineers (Astronic), Spectone, Grundig and Lustraphone, the last being a transistor model.

A one-inch diameter cathode-ray tube is used to provide indication of the peak recording level and also the bias and erase voltages in the Audiomaster Tape Adaptor. A push-pull oscillator is used. Owing to the cancellation of even harmonic distortion, such oscillators produce an almost pure a.c. signal with very little d.c. component, and thus reduce the noise level on the tape. The use of such oscillators in tape recording is becoming more popular, even to some extent in relatively inexpensive models such as the Sonomag 46 (which uses the latest Motek deck). This model also illustrates another trend in the tape recorders shown; the provision of 1⅞ in/sec as the slowest of three speeds.

In the new Telefunken 65X series (demonstrated near the fair by Welmec), the response is claimed to be only 4dB down at 8000 and 14,000 c/s for tape speeds of 1⅞ and 3¾ in/sec respectively. The braking action on these recorders is sufficiently gentle to permit the use of tape of half the standard thickness. 1,200 ft of such tape is accommodated on the 5-in diameter reels available.

A new high-quality tape recorder shown by Simon has a push-pull oscillator. The bass and treble tone controls can be used either while recording or replaying. Independent mixing is possible from three inputs, one of these being for a 30-ohm microphone. The revolution counter is actuated by the rotation of one of the two tape guides, rather than more usually by the rotation of one of the spools. Thus the indication of the length of tape traversed is given directly.

If an in-line stereophonic tape head is to be used for the reproduction of standard dual-track, single-channel recordings, the crosstalk requirements are much more stringent than for stereophonic recordings. This is because with such single channels the other tape track will probably be recorded with quite different and possibly higher-level material. The low crosstalk figure of 50dB quoted for the Reflectograph head (now manufactured by Multimusic) suggests that this, in fact, could also be used for such single channels.

Pre-amplifiers and Amplifiers—A number of two-channel amplifiers for stereophony were already shown at last year's exhibitions. The only essential differences from two separate units lie, of course, in the control ganging, channel switching and balancing arrangements. The channel balancing control seems to be generally placed at the front where it provides yet another knob to be mismanaged by the unskilled. An exception was noticed in the

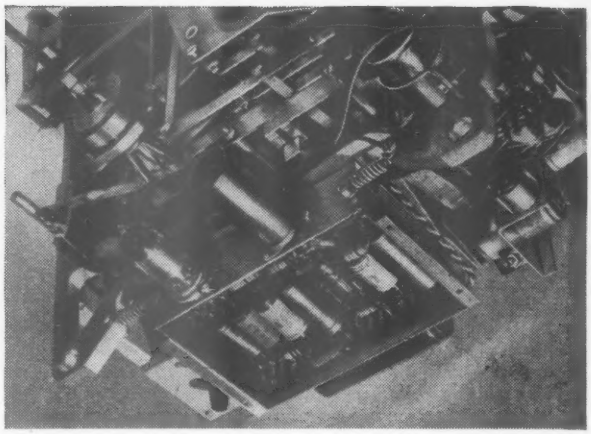

Part of interior of the Simon SP/4 tape recorder showing anti-vibration mounting of low level valve stages.

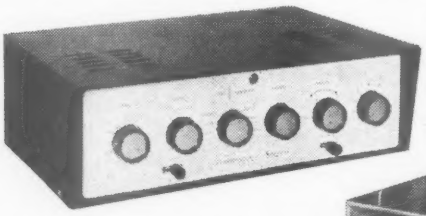

Left: Pamphonic 3000 stereophonic combined amplifier and pre-amplifier.



Below: Audiomaster tape oscillator, recording compensation and level indicating unit.

Astronic A1434 where the adjustment range was ±6dB. A similar range was provided in most other models, though in some cases it was infinite. While an infinite adjustment caters for the use of amplifiers or loudspeakers of widely differing sensitivities in the two channels, the fine adjustments of a few dB which are required for units of nominally the same sensitivity are then more difficult to make, and dissimilar units could be allowed for by a large fixed and small variable adjustment.

Useful two-channel switching arrangements, seen for example in the Dulci pre-amplifier, allow selection of either channel (possibly to be fed to both loudspeakers); or the addition of both channels, which would be required for playing ordinary single channel records with a 45/45 two-channel pickup. Two other useful switches on the Pamphonic 3000 allow the phase of one of the channels to be reversed with respect to the other, or alternatively the two channels to be interchanged. Thus two likely mistakes in connecting units together can be corrected with a minimum of difficulty.

The amount of data supplied on the various exhibits was if anything even more variable than usual. For example, we collected a tape-recorder leaflet which did not even give the possible tape speeds. On the other hand, the data given on the very comprehensive new Astronic A1432 control unit include graphs of the frequency responses given by the various controls, signal-to-noise ratios even for the highest sensitivity inputs, and the required input and output voltages and impedances. These last data are of course very important for considering the interconnection of different units.

The ear of course must be the final judge, but as usual the crowds almost completely prevented any relaxed listening. Relaxed viewing was, however, quite possible owing to the welcome continuation (not a new trend!) of the use of programme sellers who were very "easy on the eye".

SELECTIVE PAGING

Radio System Using Amplitude and Frequency Modulation

A NOVEL u.h.f. paging system by means of which people in any part of a building having one of the special receivers can be called individually and confidentially has been introduced by the Page Boy Company, a division of Cotterill-Ginn, Ltd., 13, Suffolk Street, London, S.W.1. As the block schematic diagram shows, the installation consists of four items; i.e., radiator supply unit, modulator, r.f. unit and pocket receiver. One or more modulators can be included to enable selected executives of the company or organization to call personally individual members of the staff.

Radiation takes place on a frequency of 465Mc/s, the u.h.f. carrier being amplitude modulated by a supersonic frequency which in turn is frequency modulated by a calling tone or by speech. The number of independent receivers in the system is governed by the product of the number of a.f. calling tones employed and the number of supersonic coding frequencies in the range 25kc/s to 50kc/s that can be used. The maximum number with the present equipment is 144, provided by 24 coding frequencies and 6 calling tones.

The r.f. units are simple, self-oscillating, push-pull stages with h.t. rectifiers and the oscillators are normally held quiescent by a large negative grid bias. Application of the supersonic modulation cancels the bias on positive peaks and pulses of r.f. are radiated on which is superimposed either the selective calling tone or speech. The effective range is stated to be 40 to 50 yds.

Pocket receivers, which measure only $5\frac{3}{4} \times 2\frac{3}{4} \times 1$in, employ printed circuits and transistors. The signal is received on a broadly-tuned aerial system and the sub-carrier is extracted by a silicon crystal detector. All the circuits, except the aerial, therefore have to deal only with the supersonic sub-carrier, the a.f. calling tone or the modulation. Some idea of the receiver layout can be gleaned from the block diagram.

A novel feature of the receiver is that the incoming calling tone is used to trip a quiescent audio oscillator, which provides the actual calling tone.

The receiver is powered by four "Deac" (nickel-cadmium) accumulator cells and when the receiver is not in use this battery is charged via a built-in germanium diode.

Block schematic diagram of the Page Boy selective calling system.

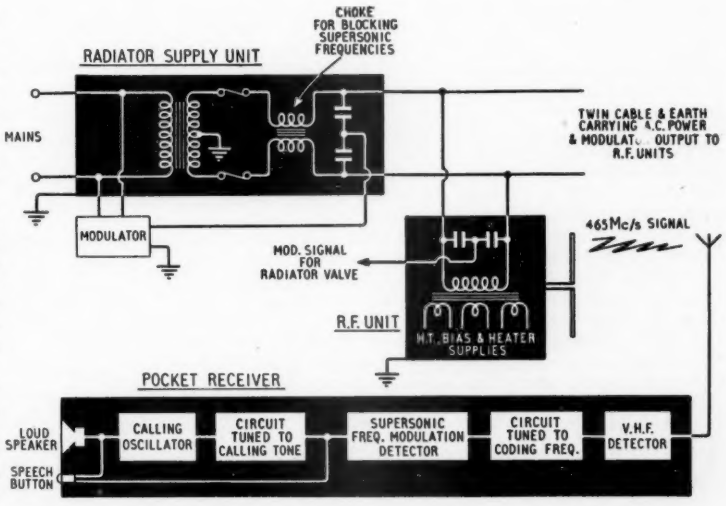

Measuring TV Aerial Performance

3.—Impedance Measurements

By F. R. W. STRAFFORD*, M.I.E.E.

(Concluded from page 123 of March Issue)

THE previous parts have shown that accurate and consistent measurement of aerial gain and directivity required an extensive site substantially free from reflections. The measurement of aerial impedance, and mismatch effects involving the feeder, does not require such onerous conditions and a smaller site, and the presence of reflecting objects, can, within certain tolerances, be permitted.

At television frequencies a simple and highly efficient aerial is the dipole (Fig. 10). The equivalent circuit (Fig. 10(b)) is a series combination of L, C and R. In the conventional receiver tuned circuit these parameters are substantially independent of frequency. Hence, a single measurement of the magnitude of each enables us to plot the impedance



Fig. 10. The equivalent circuit of a half wave dipole (a) is shown in (b).

curve on the basis of simple calculation, and from this curve predict the effective bandwidth available for handling a desired range of signal frequencies. The dipole, on the other hand, displays marked variations of R (its radiation resistance) both as regards variation with frequency and with height above ground. The effect of the latter may also include the effect of neighbouring conducting, or partly conducting, obstacles such as buildings and personnel. If the aerial is erected about one wavelength above ground, and two or three wavelengths from reflecting objects, the terminal impedance measured between x and y (Fig. 10(a)) will be largely unaffected by these factors. But measurement of the dipole terminal impedance cannot be made without connection to the measuring apparatus, and this must be made through a length of low-loss feeder. This brings us to consider whether there is any point, other than academic, in measuring the terminal impedance because the feeder is always a practical requirement and in any event exercises a greater influence upon the actual impedance as viewed by the receiver input (or transmitter output) than the normal variations inherent in the aerial.

The general problem is shown in Fig. 11 where the aerial terminal impedance Z appears at the far end of a feeder of characteristic impedance Z_o and length x. The magnitude of the input impedance, Z_i, may be obtained from classical transmission-line theory and is given by the somewhat complicated expression:—

$$Z_i = \frac{Z_o(Z+Z_o\tan h\ Px)}{Z_o+Z-\tan h\ Px} \quad \ldots\ldots\ldots (8)$$

where $P=a+jb$, a is the term due to the resistive losses of the feeder, and b is equal to $\frac{2\pi}{\lambda}$.

Providing that the feeder losses are low, say not more than 1dB, the expression may be simplified to:—

$$Z_i = \frac{Z_o\left(Z+jZ_o\tan\frac{2\pi x}{\lambda}\right)}{Z_o+jZ\tan\frac{2\pi x}{\lambda}} \quad \ldots\ldots\ldots\ldots (9)$$

It is more convenient to put $\frac{2\pi x}{\lambda}$ in its angular form θ for as x is varied θ varies from 0 to 360 degrees.

So the expression to be studied is:—

$$Z_i = \frac{Z_o(Z+jZ_o\tan\theta)}{Z_o+jZ\tan\theta} \quad \ldots\ldots\ldots\ldots\ldots (10)$$

This is a most fascinating expression and the reader may wish to interest himself in evaluating Z_i for the following conditions:— $Z=0$, $Z=\infty$, $\theta=0, \frac{\pi}{4}, \frac{\pi}{2}, \frac{3\pi}{2}$ and 2π.

Particular interest resides in the conditions when θ is respectively $\frac{(2n-1)\pi}{4}$ and $\frac{n\pi}{2}$. This corresponds to lengths, x, of feeder of *odd* quarter wavelengths,



Fig. 11. Aerial feeder of characteristic impedance Z_0 terminated in an impedance Z.

or even *multiples* of half wavelengths. The following very interesting results are obtained:

Odd quarter wavelengths of feeder:—

$$Z_i = \frac{Z_o^2}{Z} \quad \ldots\ldots\ldots\ldots\ldots\ldots\ldots\ldots (11)$$

Even half wavelengths of feeder:—

$$Z_i = Z \quad \ldots\ldots\ldots\ldots\ldots\ldots\ldots\ldots (12)$$

In the former case the influence of the characteristic impedance, Z_o, of the feeder is most marked, while in the half-wave multiple condition the feeder has no effect whatever on the input impedance. Use is

* Consulting radio and electronics engineer.

made of these two unique properties of the feeder. A quarter-wave feeder may be used deliberately to transform, or match, an aerial to its main feeder. For example (from equation (11)), if the characteristic impedance of the main feeder is Z_i, and that of the aerial is Z, then the impedance, Z_o, of a quarter-wave section to give perfect matching is given by

$$Z_o = \sqrt{Z.Z_i}.$$

On the other hand, if the terminal impedance of the aerial is desired, the influence of the connecting feeder may be removed completely if it is one or more wavelengths long. If the terminal impedance is to be measured over a range of frequencies it is a tedious matter to cut the feeder to the correct length for each frequency. It is, of course, possible to calculate the terminal impedance, Z, from equation (10) but this is even more tedious.

Fortunately, a very elegant graphical method exists[1] whereby the impedance may be corrected for the length of feeder. That is to say, if Z_i is measured and the length of the line is known, the terminal value of Z may be obtained at a glance. The length of the line is, of course, not the physical length, but the electrical length which depends upon the type and amount of dielectric between the conductors. The electrical length is obtained by dividing the physical length by the square root of the effective dielectric constant of the insulator. The graphical method also permits the inclusion of the feeder loss to give greater accuracy.

It is beyond the scope of this article to try to explain the theory of the construction of the chart of which an example is shown in Fig. 12. In this chart the circles whose centres lie on the resistive component axis correspond to constant values of resistance, and the arcs of circles whose centres lie on an axis perpendicular to the resistance axis

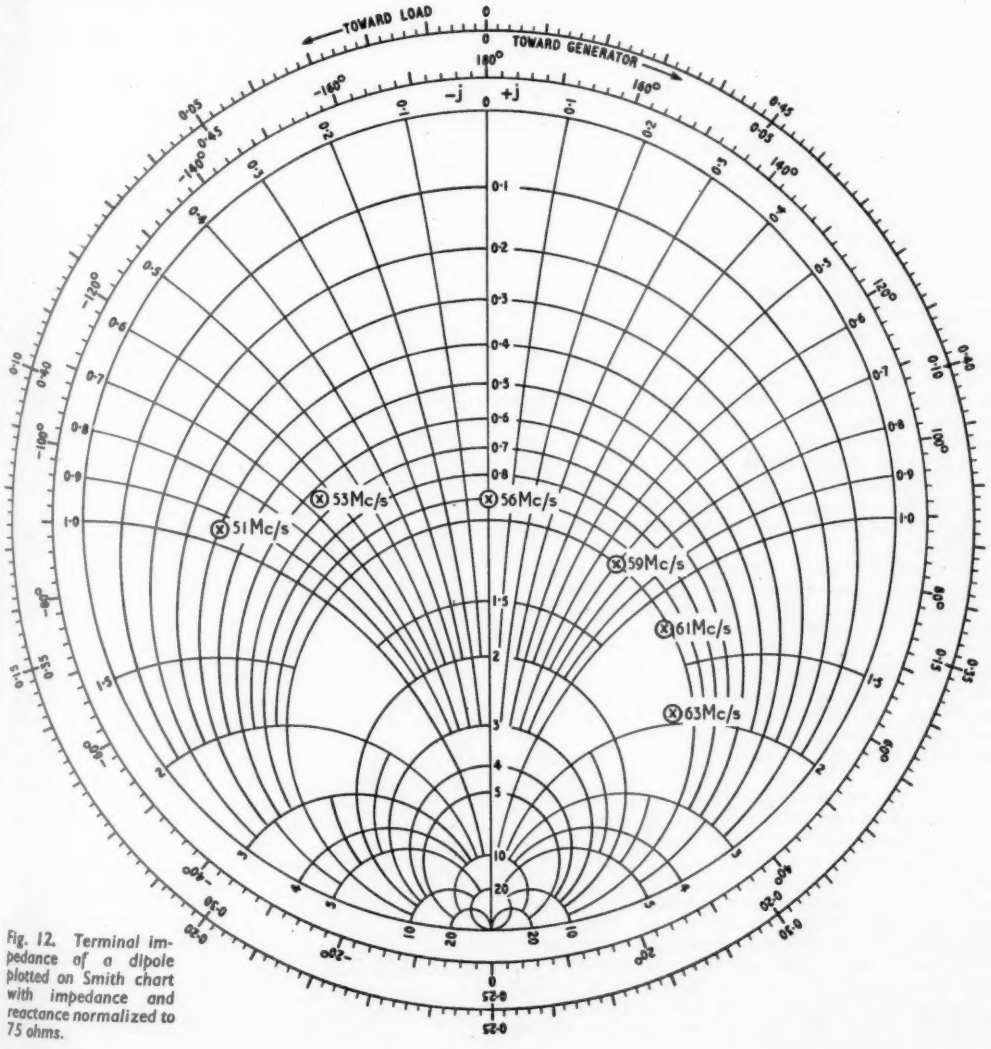

Fig. 12. Terminal impedance of a dipole plotted on Smith chart with impedance and reactance normalized to 75 ohms.

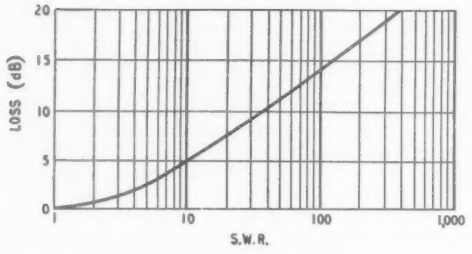

Fig. 13. Relationship between r.f. power loss and standing-wave ratio.

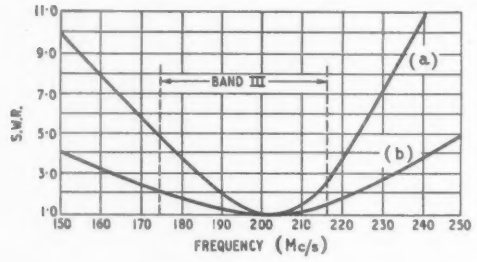

Fig. 14. Frequency/standing-wave ratio characteristics on Band III of (a) plain dipole, (b) folded dipole.

correspond to constant values of reactance, positive or negative. Thus the chart covers all values of impedance from zero to infinity and the position of a point corresponding to any given complex impedance may be found from the intersection of the resistance and reactance co-ordinates corresponding to the resistive and reactive components of the unknown impedance. The reader whose work entails much measurement of this kind will know how useful the Smith chart is. Also, how very difficult to explain to the uninitiated! A typical plot of the terminal impedance of a dipole is included in Fig. 12.

The characteristics were measured through a length of 75-ohm coaxial feeder and corrected for its effect at each frequency so that the true terminal impedance of the aerial was measured. The chart is normalized with respect to the feeder impedance so that each value must be multiplied by 75 ohms to obtain the resistance or reactance. For example, at 56Mc/s the dipole is resonant, the reactance is zero and the resistance 67.5 ohms. At 51Mc/s the reactance is 71 ohms (negative), and the resistance 30 ohms.

The need for measurement of aerial impedance is chiefly, if not wholly, concerned in practice with determining the loss of signal transfer due to the mismatch between the aerial and feeder impedances. Irrespective of the feeder length this mismatch loss may be determined by measuring Z_i on apparatus which gives the resistive and reactive components separately. If the terminal impedance of the aerial is not resistive, or not equal to the characteristic impedance of the feeder, a standing wave of voltage is set up by reflection. The reflection coefficient, K, which varies between zero and unity is related to the standing-wave ratio, σ, by the expression:—

$$\sigma = \frac{1+K}{1-K} \quad \ldots\ldots\ldots\ldots\ldots\ldots\ldots\ldots \quad (13)$$

The value of the reflection coefficient can be calculated from the known value of the feeder impedance, Z_o, and the measured input impedance, Z_i. It is much more desirable, however, to measure the admittance, Y_i, and most bridges or similar apparatus for this purpose measure directly the conductance G_i, and susceptance B_i, such that $Y_i = G_i + jB_i$.

In this case the characteristic impedance now becomes the characteristic conductance, G_o. If the admittance bridge measures G_i and B_i separately, then, independent of the feeder length, providing its losses are low, the reflection coefficient may be calculated from:—

$$K = \sqrt{\frac{(G_o-G_i)^2 + B_i^2}{(G_o-G_i)^2 - B_i^2}} \quad \ldots\ldots\ldots\ldots\ldots \quad (14)$$

from which the s.w.r. may be derived from equation (13).

Having obtained the s.w.r. the loss of signal power due to the mismatch may be obtained from the formula:—

$$\text{Loss in dB} = 10 \log_{10} \frac{(1+\sigma)^2}{4\sigma} \quad \ldots\ldots\ldots \quad (15)$$

This relationship is plotted in Fig. 13. It will be seen that a fairly moderate degree of mismatch is permissible before any serious reduction in power transfer takes place. A two-to-one mismatch

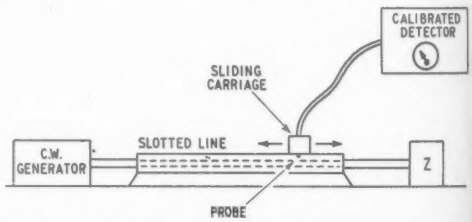

Fig. 15. Basic arrangement of a slotted line for standing-wave ratio measurement.

results in only 0.5dB loss of power. If the mismatch does not exceed four-to-one the power loss will not be greater than 2dB and is the sort of figure to be aimed at if a multi-channel TV aerial is being designed. Fig. 14(a) is a plot of the frequency/s.w.r. characteristics of a simple Band-III dipole working into a correctly terminated 75-ohm coaxial feeder. Curve (b) is the characteristic for a folded dipole working into a 300-ohm feeder as is standard practice in the U.S.A. The improvement is apparent and the long-lived 75-ohm feeder standard of this country does make it difficult to design really wide-band aerials so that rationalized stocks can be held to cater for the three channels already in use on Band III, bearing in mind that the remaining five are bound to be released one day.

If this curve (Fig. 14) is replotted as a curve of dB loss against frequency (with the aid of Fig. 13) the resultant is *not the variation of gain with frequency.* The directivity of most types of multi-element aerials varies considerably with frequency so that

(*Continued on page 297*)

the pick up might occur at a minimum several dB down from the major lobe response. On the other hand, the mismatch between aerial and feeder *is independent of the directivity*. Thus, while the s.w.r./frequency curve shows the power loss due to mismatch, no wider significance attaches to it, and it should be accompanied by a curve relating gain and frequency with the aerial fixed on the bearing for maximum gain at the design frequency.

The standing waves launched onto a feeder, due to mismatch, have their maximum and minimum amplitudes spaced exactly one quarter-wavelength apart successively along it. These are the electrical distances which, as previously explained, are related to the physical distances in terms of the magnitude of the di-electric (permittivity) constant of the feeder insulation.

The s.w.r. may be measured directly by the slotted-line technique[2] shown in Fig. 15 in which power at the desired frequency is fed into an air-spaced coaxial line carrying a longitudinal slot over most of its length. A sliding carriage, carrying a probe, which is capacitively coupled to the inner conductor, is used to explore the s.w.r. over the length of the line. The output from the probe is rectified and suitably displayed. The unknown impedance is connected through its own feeder to the remote end of the slotted line and the carriage is simply slid along to a maximum rectifier output, which is noted. The same process is repeated for a minimum output, from which the ratio is calculated after correcting for the non-linear characteristics of the rectifier. The latter need not be done if a standard signal generator is used as the source of power. The rectifier output is then maintained constant and the s.w.r. measured direct in terms of the attenuator settings on the signal generator. In this case, however, the latter should be capable of providing at least 0.5 volt into the slotted line as the pick up by the probe is small. It has to be loosely coupled or errors in the determination of s.w.r. will be present. Of course, the impedance of the slotted line has to be accurately matched to the feeder impedance and since the mechanics of its design necessitate an overall diameter of about 1.5in the input and output connections are gradually tapered down to the diameter of the feeders from the signal generator and to the unknown load impedance. The slotted-line technique is very well suited for Band-III measurements since the separation between successive maxima and minima is only about 16in at the lowest frequency. On the other hand, the separation at 45Mc/s is about 70in, and the design of an accurate slotted-line of this length involves many mechanical difficulties concerned with the accurate maintenance of coaxiality between the inner and outer members, and the constancy of spacing of the sliding probe in relationship to the inner member. For these reasons it is usual to employ the bridging, or similar null-producing techniques, for the purpose. If both bands, not forgetting Band II, are to be covered economically, bridging methods are to be preferred, since one bridge can cover all the frequencies involved.

Fig. 16 is a photograph of an arrangement for the measurement of the admittance of a typical Band-III TV aerial.

The General Radio admittance bridge is shown in the centre. The length of rigid coaxial feeder extending from the right hand of the meter is constructed so that its length may be varied. By this means the total feeder length may be maintained at an integral multiple of half-wavelengths between the instrument and the load so that the readings are independent of the feeder characteristics. The preliminary setting up consists of disconnecting the feeder from the aerial and adjusting the trombone to half extension. The output from the signal generator is adjusted to the centre of the frequency range of the measurements, and the conductance and susceptance arms of the bridge are set to zero, and the range multiplier to unity. Short pieces of feeder are cautiously snipped off until the bridge is balanced, as shown by a null reading on the detector to the right of the photograph. If one has overstepped the cutting process exact balance may be retrieved by slight adjustment of the trombone

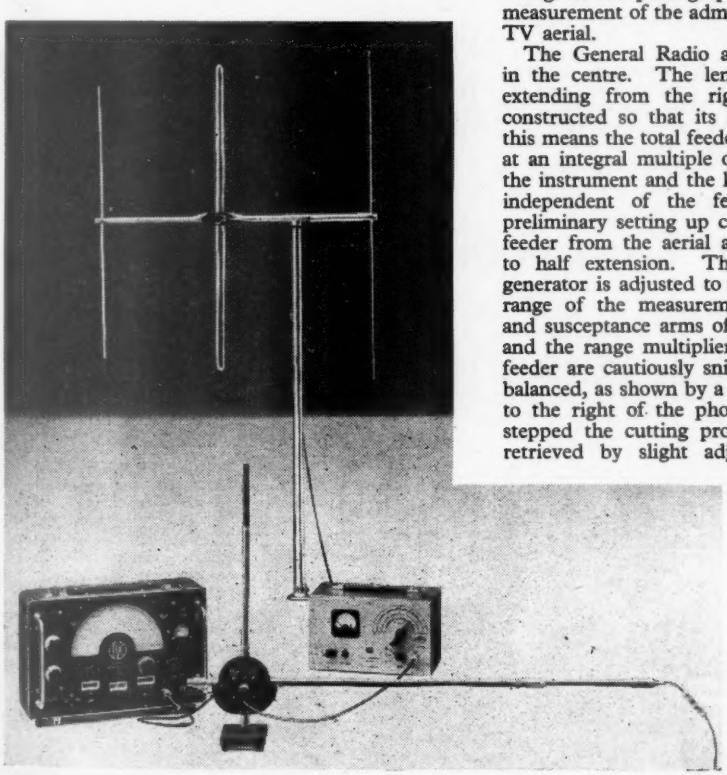

Fig. 16. Arrangement of equipment for measurement of admittance of typical Band-III aerial system. In practice the aerial is higher than shown and about 15ft away.

section. The aerial is reconnected and the bridge is balanced for the conductance and susceptance of the aerial. The frequency is changed, the aerial disconnected, while the trombone is readjusted for zero conductance and susceptance, and then reconnected for the next measurement. This somewhat tedious procedure is eliminated if the trombone technique is omitted and the Smith chart used, but quite a lot of tabulation is required prior to plotting the final result on the chart, since the true electrical length of the feeder must be known at each measurement frequency.

REFERENCES

[1]Smith, P. H. "Transmission Line Calculator". *Electronics*, January 1939, Vol 12, p.29.

[2]Willis-Jackson, F. "High Frequency Transmission Lines" Monogram Series. Methuen.

Books Received

Glossary of Terms Used in High Vacuum Technology. British Standard 2951; 1958. Pp. 29. Price 7s 6d. British Standards Institution, 2, Park Street, London, W.1.

Proceedings of the XIIth General Assembly of U.R.S.I. (Boulder, Colorado, U.S.A., August 22nd-September 5th, 1957.) Volume XI, Part 1, Commission 1 on radio measurements and standards. Pp. 78. Price 100 Belgian Fr., 14s 6d, or $2. General Secretariat, U.R.S.I., 7, Place Emile Danco, Uccle-Bruxelles, Belgium.

Quality Amplifiers for A.C. Mains (Data Book No. 11) gives constructional data on seven amplifiers with tone controls, including two "Mullard" designs, and also compensation circuits useful in record reproduction. Pp. 64; Figs. 55. Price 4s 6d. Data Publications, Ltd., 57, Maida Vale, London, W.9.

Radio Upkeep and Repairs, by Alfred T. Witts. Eighth edition includes additional chapters on f.m. receivers, transistor circuits and printed circuits. Pp. 234; Figs. 174. Price 15s. Sir Isaac Pitman and Sons, Ltd., Parker Street, London, W.C.2.

Sound, by Alexander Efron. Elementary pictorial introduction to the physical and physiological bases of acoustics. Pp. 72; Figs. 62. Price $1.25. John F. Rider Pub., Inc., 116, West 14th Street, New York, 11. Obtainable in this country from Modern Book Co., 19-23, Praed Street, London, W.2. Price 9s 6d.

How Television Works, by W. A. Holm, non-mathematical treatment of transmission and reception starting from basic physical ideas extends to such details as pick-up and cathode ray tubes, aerials, types of sound and vision modulation including synchronizing wave-form, valve oscillators and pulse generators and receiver circuitry. Pp. 318; Figs. 246. Price 32s 6d. Cleaver-Hume Press, Ltd., 31, Wright's Lane, London, W.8.

Techniques of Magnetic Recording, by Joel Tall, deals primarily with uses in such fields as the recording of sounds in nature, films and television, business and industry, medicine and education. Pp. 472; Figs. 112. Price 55s 6d. Macmillan Co., 10, South Audley Street, London, W.1.

The Sources of Invention, by John Jewkes, David Sawers and Richard Stillerman discusses development of inventions and also suitable conditions for their production. Fifty examples include the long-playing record, magnetic recording, radio, television, and the transistor. Pp. 428. Price 31s 6d. Macmillan and Co., Ltd., St. Martin's Street, London, W.C.2.

Frequency Modulated Radio, by K. R. Sturley, Ph.D. Second edition of this book on the principles of f.m. transmission and reception has additional material on the counter f.m. detector. Pp. 120; Figs. 78. Price 15s. George Newnes, Ltd., Southampton Street, London, W.C.2.

SHORT-WAVE CONDITIONS

Prediction for June

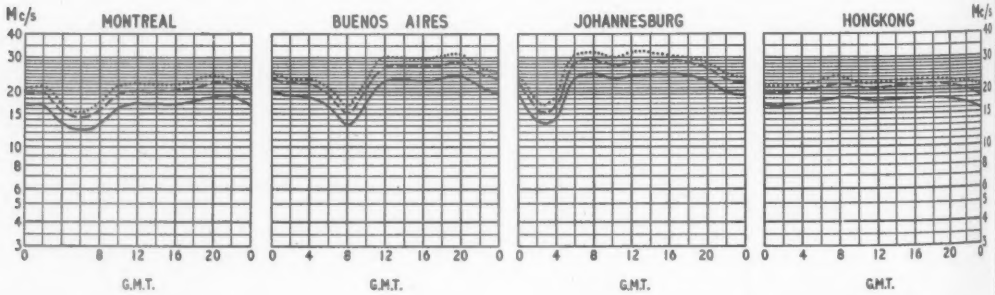

THE full curves given here indicate the highest frequencies likely to be usuable at any time of the day or night for reliable communications over four long-distance paths from this country during June.

Broken-line curves give the highest frequencies that will sustain a partial service throughout the same period.

MANUFACTURERS' PRODUCTS

Screened Transistor Coils

TINY screened coils for use in transistor receivers are now obtainable from Channel Electronic Industries, Ltd., Dunstan Road, Burnham-on-Sea, Somerset. They measure $\frac{1}{2}$in diameter at the base (slightly less at the top) and are $\frac{3}{4}$in high excluding fixing lugs and connecting pins. Windings are on low-loss moulded nylon formers with ferrite pot cores and Q values of 180 are claimed.



Channel miniature, screened oscillator and i.f. coils for transistor receivers.

Three coils comprise the present range, Type 735 oscillator coil, Type 736 1st or 2nd i.f. transformer and Type 737 3rd i.f. transformer. They are primarily intended for use with transistors such as the Mullard OC44 and OC45 and Siemens XA101 and XA102 and for an intermediate frequency of 460 to 470kc/s. They cost 11s 3d each.

Miniature Soldering Iron

THERE are endless jobs that demand a really miniature soldering iron especially now that electronic equipments are becoming so much smaller due to the introduction of transistors. One that is described as "pencil size" and having a bit only $\frac{3}{32}$in diameter is obtainable from Antex, Ltd., 3, Tower Hill, London, E.C.3. Known as the "Precision" miniature soldering iron it is made for use on voltages of from 6V to 230V with the consumption ranging from 8 to 15 watts. Alternative bits of $\frac{5}{32}$in and $\frac{7}{32}$in diameter can be supplied, also bits of different length, five sizes in all available.

Because bits of soldering irons are expendable and must be replaced special care is taken to ensure that the worn out bit does not stick in its holder.

Despite its small size, it is only $6\frac{1}{2}$in long and weighs under 1oz, the electric heating element is fully insulated from the iron and is housed inside a steel tube approximately $\frac{1}{8}$in in diameter.

Special attention has been given to the cord grip in order to relieve the internal connection of all cord strain and the lead and the element are readily replaced when necessary. All irons are flash tested at 900V a.c., equivalent to 1,500V d.c. The price of the "Precision" iron is 25s for low-voltage (under 50V) models and 29s 6d for high-voltage models.

"Precision" miniature soldering iron for high- or low-voltage operation.

Neon Oscillator Probe

THE "Elge" Radio Pen is an elaboration of the usual neon test probe. Additional components are a 10MΩ resistor in series, and a 200 pF capacitor in parallel with the neon. The application of a d.c. voltage of a suitable polarity charges up the capacitor through the resistor until the neon flashes over and discharges the capacitor. This process is continually repeated resulting in an approximately sawtooth oscillatory output of 25V (peak-to-peak) across the neon. The time taken to charge the capacitor to the neon flashover voltage depends on the input voltage, so that a measure of the input in the range 90 to 300V can be obtained from the neon oscillation frequency which then ranges from 300c/s to 5Kc/s. In addition, the sawtooth oscillations can provide a signal source extending into the radio frequency region. An alternating voltage applied to the pen will produce a glow near both electrodes of the neon, and may be identified in this way. This probe is of Austrian origin, and distributed in this country by Mercia Enterprises, Ltd., Godiva House, Allesley Old Road, Coventry. It costs 24s.



"Elge" Radio Pen.

Sound Perfect

When planning your Sound System you can rely on TRIX for speakers and microphones.

The new Sound Columns give a marked directional flat beam effect, with striking improvement in acoustic efficiency and economy in installation.

Both the microphones shown have wide frequency range and are also available with switches.

Write now for latest detailed literature.

TRIX

TRIX ELECTRICAL CO. LTD.
Maple Place, London, W.1
Telephone MUSeum 5817

RANDOM RADIATIONS

By "DIALLIST"

Rehabilitating C.R.T.s

IT'S GOOD to learn from the article in the May issue of *W.W.* and other sources that the business of giving a new lease of life to c.r. tubes, in which breakdowns are far commoner than they should be, is now being undertaken by firms employing highly skilled staffs, working in well-equipped factories. It has always seemed all wrong to me that such an expensive part of the television receiver should have to be scrapped because of such a fault as a grid-cathode short, or a burnt-out heater. Various firms have been in the business for some time, catering largely for maintenance concerns; but their work hasn't always been too good and, as the article in question pointed out, the term "reconditioning" was used to mean a number of different things. One of them, for instance, was (and probably still is) the treatment of a tube whose emission had become low by applying considerably more than the rated voltage to the heater for a spell—and that sort of reactivation is better done by the use of a booster transformer for the heater. But neither method is of much use if the cathode is in poor shape. The cathode-heater short, again, can be dealt with, if the set is worked from a.c. mains, by fitting an isolating transformer for the heater. But unless the bulb can be opened and new parts fitted a grid-cathode short spells disaster. I've no personal experience of the performance of tubes which have been expertly fitted with new cathodes and heaters and I'd be very glad to hear from any readers who have. Much must depend on the pumping. If that's well done and the phosphor is in good condition, I can't see any reason why the refitted tube shouldn't put up as good a show as a new one.

Why Valves?

WHEN Fleming brought out his diode it was natural that it should be called a valve, for its action on an electric current was similar to that of mechanical non-return valves on currents of water or steam in allowing one-way traffic only. De Forest's triode changed the whole picture. Traffic was still in one direction only, but that wasn't its main business: it could amplify and it could oscillate. But the idea that any electronic "bottle" was a valve had become so firmly rooted in this country that we call it and the far more complicated multi-electrode affairs which followed, and continue to follow, all valves. Even the magnetron sometimes gets the name. Americans call the whole lot tubes, hardly any better, for it isn't a bit descriptive and the shape of many of them is far from being tubular. The French are logical enough in using "valve" for the diode only; but they fall down rather in their term for other types, which is simply "lampe," bringing back memories of the old bright emitters of the early days. And they were bright, some of them. An early American word for the triode was Audion. I remember seeing in one of their wireless magazines of the time a picture of a man reading a book under a kind of chandelier, into which he'd built a wireless receiver, with its valves arranged in a ring round the outside. The caption was "Reading by Audion Light"! The word "condenser" is on the way out because it was such a complete misnomer. "Valve" is just as much a misnomer: can't we do something about that too? Any suggestions?

Rules of Thumb

SURPRISINGLY few useful rules of thumb came in from readers of *W.W.* in response to my request for some good ones. One of the best I've come across, though, was sent by L. F. Ivin, of the B.B.C. It concerns the reactance of small capacitors: "One hundred and sixty thousand ohms per micky-mike per megacycle"—the alliteration is rather attractive, isn't it? We'll take the case of a 100-puff capacitor at 10 Mc/s. Write down 160,000; knock off two noughts for the 100 puffs and one for the 10 Mc/s. That leaves 160Ω, which is right. And he has a better one than my "yard plus ten per cent" for the metre: A metre is 3 feet 3 inches and 3 eighths of an inch =39.375 in, which is correct within a "thou" or two. Any who have done any rifle shooting will remember the useful one: A minute is one inch at 100 yards, or one inch subtends an angle of one minute at 100 yards. Since there are 3,600 inches in 100 yards, this one is based on taking the approximate figure of 60° for the radian. One way of squaring any two-figure number in one's head which I find very handy is this: Simply bring the number to the

ASSOCIATED ILIFFE TECHNICAL BOOKS

"WIRELESS WORLD" PUBLICATIONS

	Net Price	By Post
LOW-COST HIGH-QUALITY AMPLIFIER. P. J. Baxandall, B.Sc.(Eng.)	3/6	4/-
INTRODUCTION TO VALVES. R. W. Hallows, M.A.(Cantab.) and H. K. Milward, B.Sc.(Lond.), A.M.I.E.E.	8/6	9/4
ABACS OR NOMOGRAMS. A. Giet. Translated from the French by H. D. Phippen and J. W. Head	35/-	36/-
TELEVISION RECEIVING EQUIPMENT. W. T. Cocking, M.I.E.E. 4th Edition	30/-	31/9
TRANSISTOR A.F. AMPLIFIERS. D. D. Jones, M.Sc., D.I.C., and R. A. Hilbourne, B.Sc.	21/-	21/10
SECOND THOUGHTS ON RADIO THEORY. "Cathode Ray" of *Wireless World*	25/-	26/4
RADIO LABORATORY HANDBOOK. M. G. Scroggie, B.Sc., M.I.E.E. 6th Edition	25/-	26/9
BASIC MATHEMATICS FOR RADIO AND ELECTRONICS. F. M. Colebrook, B.Sc., D.I.C., A.C.G.I. Revised and enlarged by J. W. Head, M.A.(Cantab.). 3rd Edition	17/6	18/6
FOUNDATIONS OF WIRELESS. M. G. Scroggie, B.Sc., M.I.E.E. 7th Edition	15/-	16/4

A complete list of books is available on application

Obtainable from all leading booksellers or from

ILIFFE & SONS LTD., Dorset House, Stamford Street, London, S.E.1

nearest ten by adding (or subtracting) the amount needed, then multiply the number, plus (or minus, as the case may be) the same amount by this and add on the square of the number used to bring it to the nearest ten. Thus $87^2=(87+3)(87-3)+3^2=84\times90+9=7{,}569$. In other words, $x^2-y^2=(x+y)(x-y)$.

Electricity Direct from Heat

SINCE the first announcement some months ago of promising results in the production of electricity directly from heat by American physicists using apparatus on the lines of the diode valve, some success has been achieved by other workers in that country. One is using thermocouple methods. At first blush that doesn't seem to be a line of approach likely to lead to worth-while results on a large scale, for the efficiency of the familiar thermocouple is very low indeed. It is, however, stated that great improvements have already been made in this and it is believed in some quarters that this method may eventually prove to be of practical use. Others are working on different forms of diode apparatus. In our own country some of the big shots in the nuclear energy field have said that experiments are coming along quite nicely; but no mention has been made of the methods tried. The problem of the direct generation of electricity from heat is bound to be solved sometime and I believe that it won't be so very long before an efficient practical system is evolved.

I.T.A. Sound on F.M.

MANY readers have kindly written to report the reception of I.T.A. sound on slightly mistuned f.m. receivers. Most of them, as I expected, live near I.T.A. transmitters, or in places where the Band III signal is strong. One whose home is some 11 miles from Croydon has a f.m. set whose i.f. is 11 Mc/s and with this he receives the I.T.A. signal by tuning to about 101 Mc/s. Thus the second harmonic of the oscillator is $2(101-11)=180$ Mc/s. The sound on 191.25 beats with this to give an i.f. of about 11 Mc/s. But how can a frequency-modulated set detect an amplitude-modulated signal? The accepted answer to that one is that rectification takes place in the first a.f. stage of the receiver. There are some queer and unexpected happenings in wireless, aren't there?

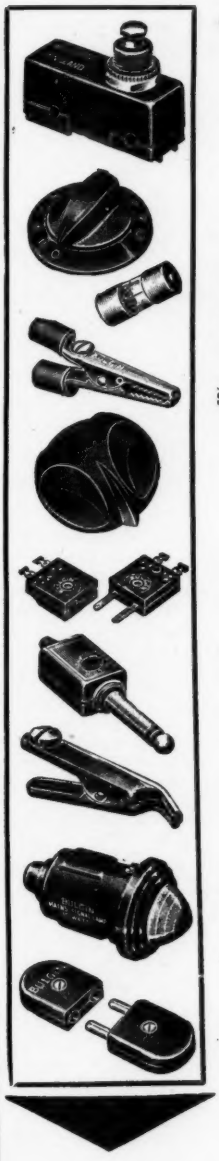

"HELP!"...

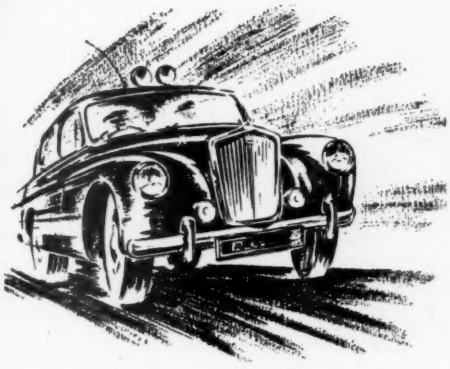

... and instant response!

Alarm-calls for aid, to save life, to prevent and detect crime! Today, communicating networks must be more efficient, contact even quicker and more unfailing. Bulgin Components make more modern, more efficient, Radio Communication Equipment possible, achieving new feats and new ambitions.

The Bulgin research and manufacturing Division, with its unique skill and experience is solving many problems of today and tomorrow.

OVER 10,000 COMPONENTS AVAILABLE

★ *Full details will be found in fully illustrated Catalogue No. 198/W.W. (Free to trade letterhead or order.)*

THE CHOICE OF CRITICS

THE HOUSE OF BULGIN components

A. F. BULGIN & COMPANY LTD.
BARKING · ESSEX Tel.: RIPpleway 5588 (8 lines)

MANUFACTURERS OF RADIO AND ELECTRONIC COMPONENTS

UNBIASED

By FREE GRID

Q. & A.

THERE was such a large number of readers who took the trouble to answer the various questions I have asked recently that I can only find space to deal with each item briefly but I should like to express my thanks to the many who wrote and for the appreciative remarks they made.

In the first place, a Canadian reader (Mr. Arthur Jackson, of Ontario) has, in my opinion, settled the question of why mains voltages are always in multiples of 11 instead of the more-to-be-expected 10. It was the fault of the gas companies which in their natural opposition to early electric lighting systems stressed the danger of shock and got a 100-volt legal limit imposed. Eventually the electricity companies got authority for a ten-per-cent error and then kept as closely as possible to the upper limit of 110 for obvious technical reasons. British exporters inflicted this voltage on the North American continent and so the 11 complex was started on its way. To my mind this seems the most feasible explanation of all.

With regard to the use of "I" as the symbol for current, several readers have pointed out to me that it signifies the intensity of the magnetic field caused by the current. To me this seems rather like measuring the gallons-per-minute going over Niagara by the intensity of the accompanying noise and then expressing it in gallons-per-minute instead of phons. I have always had an equal dislike for the use of "E" as the symbol for pressure because Electro-motive-force is such a clumsy expression; even the Gas Board doesn't talk of G.M.F.

Nobody told me why x is used as the symbol for an unknown quantity and so I shall have to guess the answer. Our old friend Descartes seems to have started this x business in 1637. There was once a theory that he took it from the word "xei," used by the Arabs to denote an unknown quantity. This is generally discounted nowadays on the ground that there is no evidence that he was acquainted with Arabic. However, he was most certainly "learned in Latin and grounded in Greek" and so my guess —repeat guess—is that he used the initial letter of the Greek word "xenon" which, as a secondary meaning, denotes "an unknown thing."

With regard to my query about car batteries, most readers mistook my query and rightly warned me not to invite an explosion by removing the charging lead without first switching off. I am still puzzled about what happens to the gas when we bowl along overcharging our batteries at 10 amps with the vents quite rightly screwed hard home.

["Free Grid" is no doubt speaking for owners of those "horseless carriages" which are not fitted with compensated voltage control for the generator.—ED.]

Fiat Lux

I WAS very surprised to read in J. R. P. Bridge's letter (May issue) of the reasons why he objects to stereo listening. He says that "the wretched listener has to sit rooted to the same spot . . . ; this puts paid to listening while doing odd jobs, minding the baby, etc."

This seems to me to show that he is numbered among the "daily droolers" who are content to let the loudspeaker drool on all day as a mere background to other activities and he is probably quite oblivious of what is being churned out at any given moment. I know from my own experience of long years ago that bathing a bawling baby renders the listening centres of the brain quite unmoved by what a well-known musical critic has described as "the heavenly tenderness of the music of Mozart."

Apart from this, however, Mr. Bridge does not seem to appreciate that even with single-channel music one has to be rooted to the same spot or, at any rate, to the same local longitude to give the best effect. In other words most loudspeakers give only of their best to those who sit somewhere along the axis. In this respect it is very like a photographic lens in which, as is well known, the best definition is given at the centre and tends to fall off at the edges which is one of the reasons why our cameras are fitted with stops. I drew attention to this lens effect of the loudspeaker over a quarter of a century ago (16.12.32) and stressed the difficulties of ranging the family in line astern in front of the loudspeaker. I emphasized my point by the sketch reproduced herewith.

"Ranging the family in line astern"

The solution to the problem, if one must bath the baby to the accompaniment of Beecham's baton bashing in 3D, is obviously headphones as Mr. Bridge realizes. But I am astonished to learn that he thinks it necessary to wear headphones with long leads attached or alternatively to have a miniature "hi-fi" receiver clamped to each ear.

Has he never heard of the system used in certain theatres, lecture halls and hospital wards where the audio signals are fed to flat metal conductors running around the room under the wallpaper and conveyed thence to "wireless" headphones by induction?

Scientists in the Dock

CAN any psychologist tell me why it is that men of science are usually so very pessimistic concerning developments in their own field of activity, and frequently hostile to new developments.

I am moved to ask this question by a recent remark made by Sir John Cockcroft about Lord Rutherford, the pioneer of the atom age. According to Sir John, Lord Rutherford said that getting power from the atom was all moonshine. One can hardly imagine a more pessimistic—and also more false—prophecy from one so eminent in this particular branch of science.

It was just the same in 1901. Nothing but pessimistic head-wagging came from all the leading scientists of the day at Marconi's idea of bridging the Atlantic by wireless. Even after the triumph of December 12th in that year, the scientists took the line that a few esses didn't constitute wireless communication any more than one swallow made a summer.

In other branches of science things are much the same. It was the medical profession which was loudest in its denunciation of the introduction of anæsthetics over a century ago.

Another strange theory about men of science is this. Why is it that they are all highly appreciative of music but comparatively seldom of the other arts? Maybe it is because "Music hath charms to soothe the savage breast," and scientists are nothing if not ruthless. So perhaps music is a sort of antidote which keeps them on an even keel.

NEW

LEAK

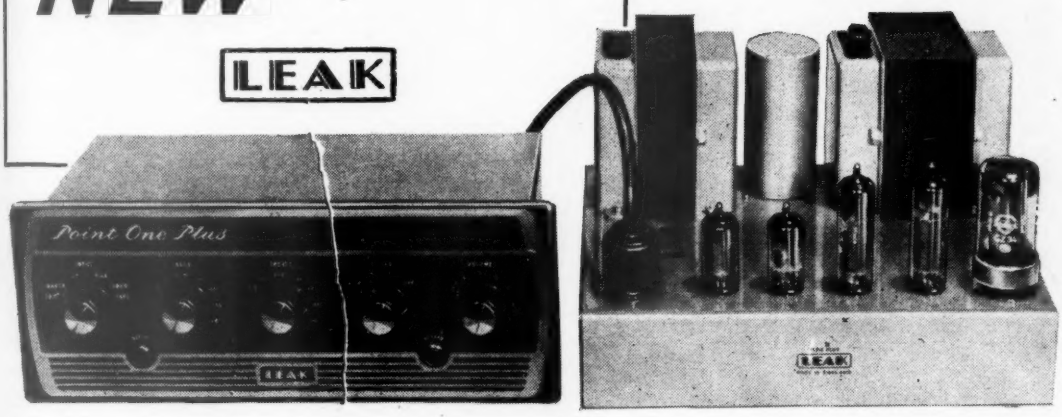

"Point One Plus" Pre-amplifier TL/12 Plus Power Amplifier

★

Make this
THE HEART
of your
Hi-Fi EQUIPMENT

Styled by the world-famous designers
RICHARD LONSDALE-HANDS ASSOCIATES

Designed by HAROLD J. LEAK to give OPTIMUM RESULTS from—:

Any pick-up available in the world.
Any tape recorder/reproducer available in the world.
Any radio tuner available in the world.
Any dynamic microphone available in the world.

★

30 GNS
COMPLETE

A price made possible only by WORLD-WIDE SALES

The Point One Plus pre-amplifier and TL/12 Plus amplifier, when used with the best available complementary equipment, give to the music-lover a quality of reproduction unsurpassed by *any* equipment at *any* price. Even when the complementary equipment falls below that of the best obtainable, the use of these amplifiers will enable one to obtain very marked improvements in reproduction.

The new Point One Plus and TL/12 Plus were exhibited and demonstrated at the New York Audio Fair and received enthusiastic consumer acceptance resulting in initial orders for one thousand one hundred and fifty sets.

LEAK amplifiers have been the choice of the B.B.C. (over 500 delivered), the South African Broadcasting Corporation (600), I.T.V. and many other Commonwealth and overseas broadcasting and TV systems, who use them for transmitting and/or monitoring (quality checking) the broadcasts to which you listen. Also, many of the gramophone records you buy are cut via LEAK amplifiers. This acceptance by professional audio engineers has led to a demand for LEAK equipment from music-lovers throughout the world.
It is appropriate here to mention one of the basic principles of LEAK design From long experience and by extreme attention to design details during development work on the pre-production models, we enable our craftsmen to achieve a high output per man-hour. The labour costs thus saved offset the increased costs incurred for high-grade materials, components and finishes, and this together with quantity production (made possible only by a world-wide market) explains how quality products may be sold at reasonable prices.

LEAK *The First Name in High Fidelity*

H. J. LEAK & CO. LTD., BRUNEL ROAD, WESTWAY FACTORY ESTATE, LONDON, W.3, ENGLAND

Telegrams : Sinusoidal, Ealux, London
Telephone : SHEpherds Bush 1173/4/5 Cables : Sinusoidal, London

Please send details of

- ☐ *FM Tuner*
- ☐ *Amplifiers*
- ☐ *Gram. pickup*
- ☐ *Name and address of my nearest Hi-Fi dealer*

Name .....

Address .....

.....

WW/6/53

Bargains to clear—Unrepeatable Prices

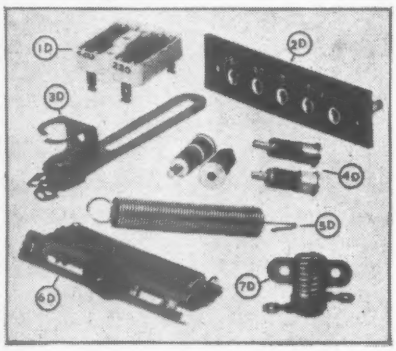

1D. Double bank trimmers available in the following values:—100-100pF, 220-22-pF, 200-500pF. **1/6** each.

2D. Socket outlets, take standard wander plug: 2-way **6d.**, 3-way **9d.**, 4-way **1/-**, 5-way **1/3.**

3D. Pilot Lamp holder **9d.** each.

4D. Silcon diodes **2/6** each or 6 for **12/-.**

5D. Heavy duty springs (10 gauge) for converting Cathode Ray Tubes etc. **1/6** or **15/-** doz.

6D. Slider resistor 1000 ohm with insulated knob and locking device, **1/9** each.

7D. Pilot lamp, smaller type **6d.** each.



LOSE TOLERANCE MICAS
p to 100pF—**6d.** each; 110-500pF—**9d.** each; 00-800pF—**1/-** each; 1000-5000pF—**1/3** each; ll one or two per cent tolerance.

ONTACTOR IN IRON CASE
losing coil designed for 12v. D.C. but suitable or A.C. with limiting resistor. Substantial ntacts, double pole—**10/-**, plus 1/6 carriage nd insurance.



POWER CHOKES

.02H, 5amp	**15/-**
10H, 200mA	**17/6**
5H, 200mA	**15/-**
3H, 200mA	**12/-**
14H, 200mA	**20/-**
1.5H, 200mA	**10/-**
3H, 100mA	**10/-**
9H, 100mA	**10/-**
20H, 100mA	**5/-**

.H.T. TRANSFORMERS
tandard 50 c.p.s. Mains input secondary 000 volts tapped at 2,600, 2,200, 1,900 volts. ll at 20mA. Also low voltage secondaries v. at 1.5amp. 4v. at 1 amp. **35/-**, plus 2/6 arriage and insurance.

IBRATOR TRANSFORMER
rimary 12v. centre tapped, secondary 250-0-250v., 100mA, **20/-** each. 70mA, **15/-** each. itto but 6v. 70mA, **12/6.** All plus 1/6 post nd insurance.

IMMER OR REGULATOR.
otal resistance 1000 ohms, maximum current .59 amps. This is a beautiful unit which ses a 32-position stud switch, resistance is ivided into 31 sections each approx. 30 ohms. n ventilated metal case, size approx. 7in. x in. x 5¼in., with wall mounting brackets nd large control knob. **15/-**, plus 2/6 post nd insurance.

LECTRICAL BRAKE. Disc type suitable or stopping lathes, coil winders, etc. Operates n approximately 100mA, complete with mounting stand, **25/-**, plus 1/6 post and ins.

LEXIBLE DRIVE SHAFT. For remote ontrol, tuning etc. 6ft. long. **45/-** each. Other lengths available; please enquire.

00 MICRO-AMP MOVING COIL METER. Flush mounting. Scale marked 0-500 micro-amps. **17/6**, plus 1/6 post and insurance.

-100mA MOVING COIL METER, 2½in. lush mounting, **15/-.**

LEXIBLE SPINDLE COUPLER for ¼in. spindle insulated and/or aligned, **1/6** each.

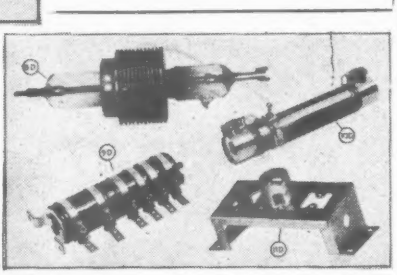

8D. High frequency transmitting valves: VT90 as illustrated—**30/-**, CV8—**20/-**, CV972 (this is two separate valves coupled together) **£3** each, CV973—**£2** each.

9D. .3Amp vitrous dropper, total resistance of main section 500 Ohms with tappings marked 200V, 225V, and 250V, also isolated separate winding of 100 Ohms **3/6** each.

10D. Wire Wound Resistors 25W, Total resistance 350 Ohms with slider for tapping, **2/6.**

11D. Small chassis with B7G skirted valve holder and punched for two I.F. transformers. Ideal for pre-amp, tuner unit etc., **2/6** each.

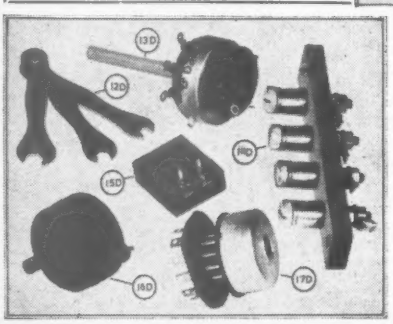

12D. Folding Spanner 2, 4 and 6BA, **1/-** per set.

13D. Standard volume controls with good length ¼in. spindle, less switch, **2/-**, with single pole switch, **3/3**; with double pole switch, **3/9.** All popular values.

14D. Four substantial terminals on insulating block. **2/6.**

15D. Socket takes standard jack, **1/-**; Jack to suit, **9d.**

16D. Morganite sealed pot, in following values, I.K., 5.K., 10.K, 25.K, 50.K, 100.K, 250.K. 1 Meg., and 2 Meg. All **1/-** each.

17D. 12 pin plug and socket, **1/8.**

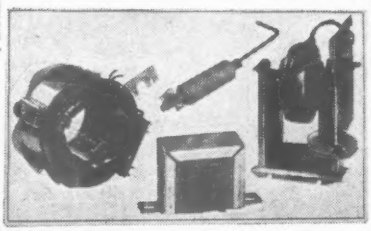

Modern T.V. Set of Coils

This set of modern T.V. parts is equally suitable for modernising an old televisor or for building into a new one. Suitable for wide angle 14in. or 17in. tubes using E.H.T. or 12-14 K.V. The four items comprise: (1) line output E.H.T. transformer; (2) 70° scanning coils on ferrite yokes; (3) width control with ferrite core: (4) frame output transformer. With these parts we also give free, complete circuit diagram of modern televisor which uses them. We offer the whole lot at the price of the line output transformer only, namely **57/6**, plus 2/6 post and insurance.

Communications Receiver R208

This is a super short wave receiver covering 5-30 metres (10-60 mc/s.). Uses 6 valves. Has R.F. stage, 2 I.F. stages B.F.O. etc. Muirhead instrument drive, two internal power packs, mains and battery vibrator pack. Complete with own P.M. speaker Provision for phones and speaker muting. Complete in metal transit case; size approx. 24 × 18 × 12; weight 70lb. Suitable A.C. mains, 100-250 and 6volt battery. In perfect condition, practically unused. Tested before despatch and guaranteed. Handbook free with each. Price **£6/19/6**, carriage and insurance 15/-, or 10/ deposit (plus 15/- carrige) then 15 weekly payments of **10/-.**

HEDRESCO HEARING AID
As supplied by National Health, completely overhauled and in good working order with six months' guarantee. Only **£2/15/-**, plus 2/6 post and ins. Complete with earphone and *new* ear plug but not batteries, these can be supplied as an extra for **5/-** per set. Instructions showing how to convert to pocket radio available free if requested.

JACK BOX
A.1 box fitted with plug, socket and lid. Ideal for making radio jack or for extending phone leads. **3/6** each.

Electrical Snip

POWER SWITCHING KIT
Rotary Q.M.B. for power and lighting circuits, facilitates switching for a multitude of different applications, heavy duty contacts for breaking up to 15 amps A.C., each insulated for well over 1000v. Applications include:—
Simultaneous on/off switching of up to 11 circuits.
Simple change-over or change-over and off of up to 11 circuits.
Phase switching of transformers and motors, star to delta etc.
Transmitter switching CW—MCW—RT.
Emergency switching from mains to stand-by equipment.
The switches are quite easy to assemble and can be altered indefinitely. Overall size approx. 12in. × 4in. diameter, extremely robust with a positive rotary snap action, really beautifully made with conrol knob. **27/6**, plus 2/6 postage.

VOLTAGE DIVIDER TRANSFORMER
In every Lab. or workshop from time to time there is need for a little more or a little less voltage. Our voltage divider transformer will fulfil this need. It has 14 similar windings joined auto-wise and to change the voltage simply join it across the number of windings which conveniently divide it. Thus if existing voltage is 12 and you wish to try 10 and 11 or 13 and 14, then connect existing winding across first 12 sections, you will then be able to take out up to 14v. in one volt steps. Voltages of up to 100 can be divided and currents up to 10 amps can be passed. A robust transformer, and weighs approx. 9lbs. Size 4¼in. × 4in. × 4¼in. Price **27/6**, plus 2/6 post and ins.



Complete Walkie-Talkie for £21. Walkie-Talkie No. 38 Radio Transmitter has a range of approx. 5 miles. Just right for search parties, fire brigades, etc. operates on dry batteries. Complete with five valves and in metal case. Size approx. 9×6×3½in. Unused but not tested or guaranteed. £1 only, plus 2/6 post and insurance.

Geiger Counter

As described in "Practical Wireless" April issue. All the parts including the 20th Century tube type G24 and other specified valves and components but not the chassis or case. £5/7/6 plus 3/6 post and ins.

T.V. Pattern Generator

All the parts for the unit described in the April issue of "Practical Television," including valves and other parts but not the chassis or case. 5/- plus 2/6 post and ins.

Response Curve Generator

All the parts to make the unit described in the April issue of "Practical Television," including valves and other parts but not the chassis or case. 5/- plus 2/6 post and ins.

Tube Tester and Re-Activator

We can supply all the main components for making this unit which will not only test Cathode Ray Tubes but also will re-activate them, supplied complete with full instructions. Price £3, plus 2/6 post and ins.

Beginner's Superhet

All the components including metal chassis, valves, metal rectifier, coils, tuning condenser, etc., etc. required to build the "Beginner's Superhet" as described in the January issue, are available as a parcel. Price £3, plus 3/- post and ins.



SERVICE SHEETS

100 sheets covering the most popular post-war Televisors by leading makers: Cossor, Ekco, Ferguson, Pye, etc., etc. Give circuit diagram component valves, I.F. frequencies, etc. £1, post free.

Radio. 100 service sheets covering British receivers which have been sold in big quantities and which every service engineer is ultimately bound to meet. The following makes are including Aerodyne, Alba, Bush, Cossor, Ekco, Ever Ready, Ferguson, Ferranti, G.E.C., H.M.V., Kolster-Brandes, Lissen, McMichael, Marconi, Mullard, Murphy, Philco, Philips, Pye, Ultra. Undoubtedly a mine of information invaluable to all who earn their living from radio servicing. Price £1 for the complete folder.

Our folder No. 2 consists of 100 data sheets covering most of the popular American T.R.F. and superhet receivers "all dry," etc., which have been imported into this country. Names include Sparton, Emmerson, Admiral, Crossley, RCA, Victor, etc. Each sheet gives circuit diagrams and components values, alignment procedure, etc., etc. Price for folder of 100 sheets is £1, post free.

Build this in ONE evening. 17" T.V.

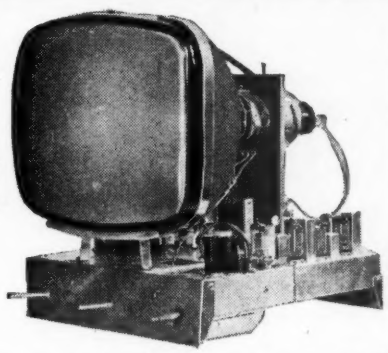

Undoubtedly the most up-to-date televisor for the home constructor. You can build it in an evening and the set when finished will be equal to a factory made equivalent.

- No technical knowledge required.
- All miniature valves.
- Metal rectifier.
- Turret tuner.
- 12-channel circuitry.
- Multivibrator time bases.
- Ferrox cube, E.H.T. and scan coils.
- 34/38 mc/s. I.F.
- Suitable for any modern 12, 14 or 16in. tube.

The building cost (less tube) is only £29/10/- plus 10/- carriage and insurance. Or £5 down and 28 weekly payments of £1. New 17in. Tubes available £16/10/-. All parts guaranteed twelve months.

Full information and data free with parts or available separately, price 3/6.

THIS MONTH'S SNIP



Breakdown unit contains: miniature relay, push-pull input transformer, push-pull output transformer, valveholders, condensers, resistors, useful Bakelite enclosed hand switch which can also be used as foot switch if mounted on base, all in really useful aluminium case with easily removable lid. Size approx. 5½in. × 4½in. × 2½in. Case is ideal for building Pattern Generator or similar instrument. Special snip price this month 8/6, plus 1/6 post and insurance.

A.C./D.C. MULTIMETER KIT

15 Basic Ranges

Measures A.C./D.C. volts, D.C. current and ohms. All the essential parts including metal case, 2in. moving coil meter, selected resistors, wire for shunts, range selector, switches, calibrated scale and full instructions, price 19/6, plus 2/6 post and insurance.

PUBLIC ADDRESS SNIP

Parmeko 12 watt output transformer, primary 4,000 ohms, centre tapped, secondary 100 ohms (thus suitable for 6-15 ohm speakers wired in series). Really massive transformer, weighs approx. 8 lb. Offered at a ridiculously low price of 17/6 plus 3/6 carriage and ins.

COIL PACK SNIP



Covers the Medium waveband 200-550 metres and two short wavebands 35-120 metres and 13-42 metres, for 465 kc/s I.F. Extremely well made, supplied complete with diagram of connections. Only 9/6 plus 1/6 post and insurance.

SUPER SENSITIVE (2,000 O.P.V.) MULTIMETER KIT

17 ranges including D.C. volts to 1,000 volts, A.C. to 1,000 volts, D.C. milliamps to 500, ohms to 2 meg., capacity and inductance. All the essential parts including metal case, selected resistors, wire for shunts, selected switches, calibrated scale and instructions, 32/6, plus 2/6 post and insurance.

Big stocks of all types of components are kept at all depots. Some special component bargains are also listed below.

Morganite Potentiometers



Single and 2 gang types available, standard size with good length spindle, all new and boxed. Gang type 3/- each—values available: 5K+5K, 100K+100K, ½ meg.+½ meg. Single types 1/- each values available: 10K, 25K, 50K, 100K, 250K, 1 meg., 2 meg.

Filament Transformer

Suitable 200-250 input, output 6.3 volts 1½ amps. Price 6/6.

Connecting Wire

P.V.C. covered in 100ft. coils—2/9 a coil or four coils different colours. 10/- post free.

.1 mfd. 350 v. Small Tubular Metal cased Condensers. Made by Dubilier, 2/6 per dozen.

Germanium Diodes. B.T.H. with wire ends. 10d. each or 9/- dozen.

Midget I.F. Coils. Dust cored, size 1½×1in., 465 Kc/s, 6/6 pair.

Standard Size I.F. Coil. Dust cored. 465 Mc/s. 6/6 pair.

Sub-Miniature Electrolytics

These are extremely small—for instance .1 mfd. is only approx. ½in. long by a little over ¼in. diameter. Mainly developed for transistor receivers, price 2/9 each. Special quotes for quantities. The following values available but additional types are being added almost weekly. 1 mfd. 18 v., 1.5 mfd. 6 v., 2.5 mfd. 6 v., 6 mfd. 6 v., 5 mfd. 12½ v., 8 mfd. 6 v., 10 mfd. 6 v., 16 mfd. 12 v., 25 mfd. 6 v., 25 mfd. 25 v., 32 mfd. 3 v.

Yaxley Switches

3-pole 2-way	1/3
12-pole, 2-way	1/6
3-pole, 3-way	1/6
9-pole, 3-way	2/-
2-pole 4-way	2/-
6-pole, 4-way	2/6
4-pole, 5-way	2/6
2-pole, 6-way	2/6
1-pole, 7-way	2/6
1-pole, 12-way	2/6
6-position shorting switch	2/-

Double-pole mains switch for attaching to Yaxley switches 1/6

Discount of 10% allowed where a dozen of one type ordered. Special quotes 144 or over.

Phillips Trimmers

0-30 pf. 1/- each, 11/- per doz. £8 per gross.

Band III Converter

Suitable Wales, London, Midlands, North, Scotland, etc. All the parts including 2 EF80 valves, coils, fine tuner, contrast control, condensers, and resistors. (Metal case available as an extra) Price only 19/6, plus 2/6 post and insurance. Data free with parts or available separately 1/6.

ELECTRONIC PRECISION EQUIPMENT, LTD.

Post orders are dealt with from Eastbourne, so for prompt attention please post your orders to 66 Grove Road, Eastbourne, marked Department 2.

42-46, Windmill Hill, Ruislip, Middx.
Phone: RUISLIP 5780.
Half day, Wednesday.

66, Grove Road, Eastbourne, Sussex.
Half day, Saturday.

29, Stroud Green Rd., Finsbury Park, N.4.
Phone: ARChway 1049.
Half day, Thursday.

226, London Road, Croydon.
Phone: CRO 6558.
Half day, Wednesday.

20th. June / 26th. June.

PARIS

SALON INTERNATIONAL DE LA PIÈCE DÉTACHÉE ÉLECTRONIQUE

INTERNATIONAL EXHIBITION OF ELECTRONIC COMPONENTS.

The largest technical display in the world in the field of electronics.

EXHIBITION PARK
PORTE DE VERSAILLES
PARIS
FRANCE

For all enquiries, apply to :
"Commissariat Général
du Salon de la Pièce Détachée"
23, rue de Lübeck, PARIS-16e
Téléphone : PASsy 01-16

The new
MOTEK-K9
TAPE DECK

This superlative all British Deck with **three speed control knob** is designed to allow easy fitment and simplicity of operation.

The many outstanding features place this Deck in a class alone.

Details on request, Patents pending.

List 21 *gns.*

MODERN TECHNIQUES

Wedmore Street, London, N.19. Tel: ARChway 3114

DHB/7315

POTentiometer LOCKS

KNOB LOCK

The ideal method of locking panel mounted controls. Positive guard against vibration, etc.

PRE-SET CONTROL LOCK

TYPE P.K.2

Very attractive appearance for panel mounting.

TYPE C.H.2

These units are designed to lock the spindles of pre-set potentiometers or trimmers without rotational or lateral displacement of shaft. Will accept wide range of panel thicknesses Send for leaflet A.1.

This development of our popular pre-set control lock is finished in black plastic and embodies control knob and instantaneous finger-tip locking knob. Send for List No. A.6.

Prices reduced!

Have you had a copy of our revised Knob Lock price list?

SCEE LTD. REDDICAP TRADING ESTATE SUTTON COLDFIELD

Phone: SUT 3038 & 5666

All good 'labs' use Radiospares

quality components for design development and prototype work

Service Engineers!

Remember- Radiospares components are delivered absolutely "by return"

Estd. L·R·S 1925

EASY TERMS

LEAK QUALITY EQUIPMENT for the Connoisseur

THE LATEST

"TL/12 PLUS" POWER AMPLIFIER

and the

"VARISLOPE III" PRE-AMPLIFIER

are designed to give the highest possible fidelity from records, radio and tape. As supplied to Broadcasting Stations throughout the world. For the finest quality reproduction together with workmanship of the highest order—your choice must be LEAK.

Cash price of the complete amplifier is **£34/13/-**. We can supply for **9 equal monthly payments of £4/1/-**. Carriage and crate paid.

All other LEAK equipment available on similar terms—also CHAPMAN and LOWTHER TUNERS. GARRARD & CONNOISSEUR Transcription motors, etc. **In fact ALL Quality Equipment supplied over 9 equal monthly payments. 5% Interest charge only.**

We pay all carriage charges.

Prompt personal service to your requirements.

The L·R·SUPPLY COMPANY, LTD.

BALCOMBE (Tel. 254) SUSSEX

SCOTCH BOY POLYESTER TAPES

...the first, and still the best!

'SCOTCH BOY' 150 was the *first* polyester based magnetic recording tape to be introduced to Britain 3 years ago. It's still way out ahead!

'SCOTCH BOY' 150 gives you fifty per cent more playing time; 1800 ft. on a 7" spool and in all lengths it's *splice free*. It is an all-weather tape which stores indefinitely. 'Scotch Boy' 150's extra thin, extra tough polyester base is practically unbreakable in use.

'SCOTCH BOY' 150 Extra Play conforms more readily to recording heads, giving true high quality reproduction.

'SCOTCH BOY' 150 first and best polyester tape, is made in Great Britain by the 3M Company, world's largest and most experienced manufacturer of recording tapes.

150 EXTRA PLAY POLYESTER

3"	300 ft.	9/6
5"	900 ft.	28/-
5¾"	1275 ft.	35/-
7"	1800 ft.	50/-
8½"	2400 ft.	72/6

TRADE MARK SCOTCH BOY

MAGNETIC TAPES

do the job BETTER

PRODUCT OF 3M RESEARCH

MINNESOTA MINING AND MANUFACTURING CO. LTD., 3M HOUSE, WIGMORE STREET, LONDON W.1 AND BIRMINGHAM • MANCHESTER • GLASGOW

In Every Application

where bellows were used, Hydroflex was preferred.

Over 50 bellows applications, covering the extensive fields of pressure sensitive systems, thermostatic systems and flexible shaft couplings, were shown on the Drayton Stand. In addition, more than 30 manufacturers exhibited instruments and mechanisms incorporating Hydroflex Metal Bellows.

HYDROFLEX CAN WORK FOR YOU AS WELL!

Write for List No. N.800-1

HYDROFLEX *Seamless* **METAL BELLOWS**

The Drayton Regulator & Instrument Company Ltd.
West Drayton, Middlesex.

B22a

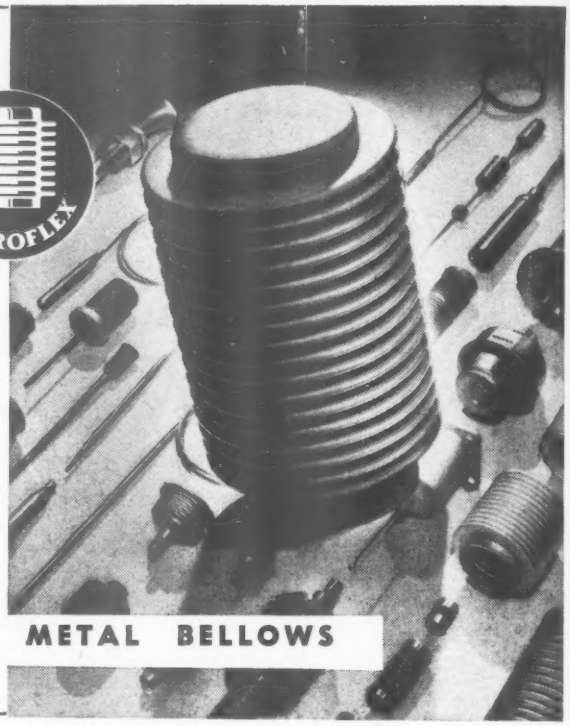

Train for a Wonderful Future in RADIO & TELEVISION...

Radio and Television techniques are continually advancing and their applications ever increasing. These fields offer to the trained technician a career with an assured and remunerative future.
Here is your opportunity to enter for:—

1 YEAR COURSE Full-time day course in the Principles and Practice of Radio and Television. Designed for the training of Radio and Television Servicing Engineers and others similarly engaged in the Electronics Industry. Next course commences September 9th 1958; others in January and May 1959.

The E.M.I. College of Electronics. Dept. 127,
10, Pembridge Square, London, W.2.
Telephone: Bayswater 5131/2.

The College is part of the E.M.I. Group . . . Britain's foremost electronic engineers . . . Pioneers of the world's first public television service.

THE E.M.I. COLLEGE OF ELECTRONICS

1A62

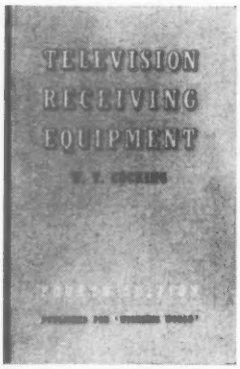

'. . . is in effect a new book that can be thoroughly recommended.'

Journal of Electronics

Television Receiving Equipment

by W. T. Cocking, M.I.E.E.

4th Ed. 30s net by post 31s 9d from leading booksellers

May justly be claimed to be one of the most important British books on television. It deals comprehensively with television receiving equipment and gives many practical details and design data. The circuits of the television receiver are split up into a number of sections and a separate chapter is devoted to each. An essential book for all television engineers and students.

Published for 'Wireless World' by Iliffe & Sons Ltd., Dorset House, Stamford Street, London, S.E.1

S.C.R. 399 WHOLE INSTALLATION

INCLUDING SHELTER H.D. 17A & 10 KW. PETROL GENERATOR P.E. 95G AVAILABLE

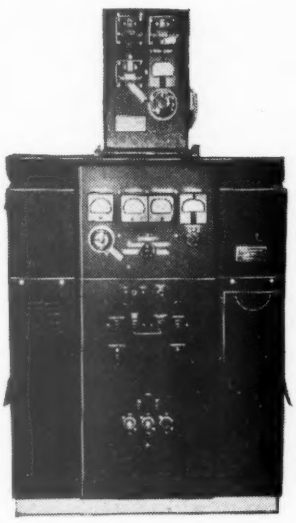

Also available separately

TRANSMITTER B610E

Frequency range 2 Mc.-18 Mc. Three pretuned channels selected by switch. Frequency control regulated either by manually tuned MASTER OSCILLATOR or crystal controlled oscillator.

Power output 450 w. telegraph, 350 w. telephone.

Power supply 120 v. A.C. 50/60 cycles special auto-transformer 120/220 v. made by Hallicrafters can be supplied additionally.

Tube complement oscillator 6V6, doubler or buffer 6L6, intermediate amplifier 807 (2). Power amplifier 250 TH. HV Rectifier 866A(2). Voltage regulator VT139(3). Audio drive 2A3(2). Modulator 100TH(2). Rectifier 5Z3(2).

Complete with Speech amplifier, aerial tuning unit, tank coils, tuning units, microphone, key, connecting cables.

We guarantee full supply of all replacement parts for a minimum of 5 years after purchase.

P.C.A. RADIO

Offices and Works

BEAVOR LANE, HAMMERSMITH, LONDON, W.6

Telephone: RIV 8006/7



AVOMINORS in leather case, with leads, fully tested **£5/10/-.** Packing and Carriage 2/6.

BRAND NEW ORIGINAL SPARE PARTS FOR ARB8 RECEIVERS.

I.F. TRANSFORMERS 1st, 2nd, 3rd, 4th (for type D) **12/6** each or complete set of 6, **60/-.**
I.F. Transformers. Crystal Load, **12/6** each.
Plates escutcheons (for D and LF), **15/-** each.
Dials (for type D), **10/-** each.
Logging dial (for D and LF), **10/-** each.
Filter Chokes (for D and LF), **22/6** each.
Output Transformers (for LF), **30/-** each.
Crystal phasing (D), **2/6** each.
Antenna trimmers (LF and D), **2/6** each.
Filter Condenser 3×4μF, **£2/10/-.**
Condensers 3×.25μF (D and LF), **2/6** each.
3×.01μF (D and LF), **2/6** each.
RF Antenna inductors (D and LF), **7/6** each.
Mains transformers (LF), **£3** each.
Medium knobs (for LF and D), **2/6** each.
Small knobs (for LF and D), **2/-** each.

INTERMEDIATE FREQUENCY TRANSMITTER

TMJ (cw and phone) 200/400 kc/s, 150 w. output, built-in P.S.U. Manufactured by Bendix Radio Corp. Meas. 6ft. 4in. × 2ft. 6in. × 2ft. 2in. Bargain price without valves **£45.** Transport in U.K. £7/10/-.

ROTARY CONVERTOR UNIT. Input 11.5-12.5 v. D.C. Output 300 v. 200 mA. D.C. **30/-,** postage and packing 15/-.

R.109A RECEIVERS. Covering 2-12 Mc/s. 6 v. D.C. New and tested, **£4/5/-.** Carriage paid.

SLIDING RESISTANCE. 2 barrels, rotary action, 0.26 ohms, 20 amp. **12/-,** post and packing 3/6.

HIGH RESISTANCE HEADPHONES. 4,000 ohms. Brand new, ex-W.D., boxed, Type C.H.R., **10/-,** D.H.R., **12/6** per pair.

LOW RESISTANCE HEADPHONES. Brand new, Type C.L.R., **5/-.** D.L.R., **7/-** per pair.

VALVES

1D8, **5/-,** 3B24 **4/-,** 5U4G **7/-,** 6AG7 **8/-,** 6AK5 **5/-,** 6B4G **5/6,** 6J6 **3/6** 6K7GT **6/-,** 6K8GT **8/-,** 6SJ7 **7/6,** 6SL7GT **7/-,** 6SN7GT **7/-,** 6SQ7 **8/-,** 53A **4/-,** 446A **20/-,** 813 (RCA) **80/-,** 955 **1/6,** VR105-30 **5/6.**

AMPERITE RELAY VALVE 5 No. 4 G **12/6.**

C.R. TUBE 5CP1 **50/-.**

CRYSTALS 1N21 **2/-,** 1N21B **7/6,** 1N22 **10/-.**

All valves tested and guaranteed. Postage and packing 6d. per valve.

P. C. RADIO LTD.
170, GOLDHAWK RD., W.12 SHEpherds Bush 4946

MODULATION TRANSFORMERS (U.S.A., Collins), primary imp. 6,000 ohms. C.T., secondary 6,000 ohms, 20 W., **9/6** each.
MICROPHONE TRANSFORMERS. Balanced input 30 or 250 ohms, U.S.A. manufacture, **7/6.** Post and packing 1/6.
JOHNSON'S AMERICAN TRANSMITTING VARIABLE CONDENSER. 501 pF., 3,500 v. **17/6,** postage 2/6.
HIGH SPEED RELAYS. 1,000 + 1,000 ohms, **7/6,** post and packing 1/6.
SCR522 TRANSMITTER (BC625), including all valves, **45/-** post free.
COMPLETE V.F.O. UNIT from TX53. Freq. range in 4 switched bands from 1.2-17.5 mc/s. Two V.T. 501s as oscillator and buffer, 807 as driver, two S130s as voltage stabilizers. Output sufficient to drive two 813s in parallel. Slow motion drive directly calibrated in mc/s. Provision for crystal control, metering of buffer and driver stage. Power requirements 400 v. and 6.3 v. D.C. Can also be used as low power transmitter. In excellent condition with valves and circuit diagram. **£5.** P. & P. 15/-.
AMERICAN HANDY TALKIE. Type B.C.611, including two operating crystals (5-6 Mc/s. band), **£19/19/-.** Postage and packing 10/-.
UNIVERSAL CALL 10 LINE TELEPHONE SWITCHBOARD, as new, fully tested with all accessories.
BC375, complete with T/U, PE73, etc.
BC221, Frequency meters.
Prices on application.
CONDENSERS, RESISTORS, COILS, TRANSFORMERS, etc. Very large selection in stock.
BUZZERS SIGNALLING TRAINING. Bakelite or wooden base, adjustable buzzer, key. New **7/6.** P. & P. 2/-.
MORSE KEYS, 8 amp. New **2/6.** P. & P. 1/-.
FULLERPHONES. New, in wooden cases, complete with buzzer, key and headphones, **10/-.** P. & P. 3/-.
TANNOY LOUDSPEAKERS. New, **£1.** P. & P. 3/-.

PERSONAL CALLERS WELCOME

ORDER YOUR BJ STEREO ARM AND CARTRIDGE NOW!

Perfect tracking is *essential* for this exciting 3-dimensional sound

Stereo versions of the Super 90 Mk. II & TAN II arms are now available AT NO EXTRA COST. BJ Stereo cartridge will be introduced next month — Order in good time from your dealer

BJ

Price: (Complete with diamond) 8gns. inc. P.T. YOU can reproduce our sensational Audio Fair demonstration in your own home.

'SUPER 90' MK.II

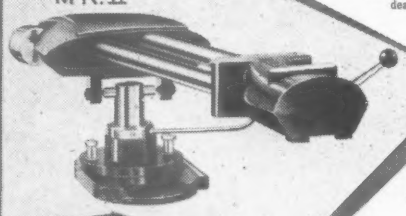

TAN II ARM



R1



TOP "C" TWEETER



R2

The only high frequency unit with omni-directional spread—simple to connect and stand on any loudspeaker cabinet, radio, TV or tape recorder.
Price: **5 Guineas** inc. tax.

Send P.O. for 7/- and you will receive by return, the famous BJ Alignment Protractor. Free on request are illustrated leaflets of the latest model arms, accessories and details of the complete range of BJ speakers, including the new BJ SONETTA, shown at the Fair.

BURNE-JONES & CO., LTD. CHEAM SURREY ENGLAND

The Best Manufacturers use Grey & Marten

'Amalgam' solder

Grey & Marten make solders *specifically* for the Radio, Television and Electronic industries.

Amalgam 'Resinact' Cored Solder with specially activated resin flux, to specification DTD 599, and B.S.441.

Amalgam P.C. Alloys for dip-tinning printed circuits (free service for checking analyses of metal in customers' baths).

Amalgam Fusible Alloys, made in all forms, for all uses. Fully approved A.I.D., C.I.A., G.P.O., I.R.C.S.C. and M.O.S.

GREY & MARTEN LIMITED

City Lead Works, Southwark Bridge, London, S.E.1. Tel: HOP 0414
and at Birmingham, Manchester and Ipswich

WALMORE ELECTRONICS LIMITED

PHOENIX HOUSE, 19/23 OXFORD STREET LONDON, W.1

Telephone : GERrard 0522 *Cables : Valvexpor*
For immediate response Telex London 8752

EXPORTERS OF **RADIO, TELEVISION** AND **INDUSTRIAL TUBES,** HAVE PLEASURE IN INTRODUCING THEIR BRAND

RADIO **WALRAD** TUBE

AND INVITE ENQUIRIES FROM BUYING AND CONFIRMING HOUSES **EXCLUSIVELY FOR EXPORT**

SUPPLIERS OF RADIO COMPONENTS ELECTROLYTICS, AND CATHODE RAY TUBES

C.R.T. ISOLATION TRANSFORMERS

For Cathode Ray Tubes having Heater/Cathode short circuit and for C.R. Tubes with falling emission.
Type A. Low leakage windings. Ratio 1 : 1.25 giving 25% boost on Secondary.

2 volt	10/6 each
4 volt	10/6 each with Tag
6.3 volt	10/6 each Panel and
10.8 volt	10/6 each Solder Tags
13.3 volt	10/6 each
Ditto with mains primaries	12/6 each

Type B. Mains input 220/240 volts. Low Capacity. Multi Output 2, 4, 6.3, 7.3, 10 and 13 volts. Input has two taps which increase output volts by 25% and 50% respectively. This transformer is suitable for all Cathode Ray Tubes. With Tag Panel 21/- each. Ditto for 6 volt Tubes only 17/6.
Type C. Low capacity wound transformer for use with 2 volt Tubes with falling emission. Input 220/240 volts. Output 2-2½-2½-3 volts at 2 amps. 17/6 each.
All Isolation Transformers are individually boxed, labelled and clearly marked with relevant data.
NOTE:—It is essential to use mains primary types with T.V. receivers having series connected heaters.

RESISTORS. All preferred values. 20% 10 ohms to 10 meg., ½ w. 4d.; ½ w., 4d.; 1 w., 6d.; 1½ w., 8d.; 2 w., 1/-.
HIGH STABILITY. ½ w., 1%, 2/-. All preferred values 100 ohms to 10 meg. Ditto 5%, 9d., 10%, 6d.

5 watt	WIRE-WOUND RESISTORS	1/3
10 watt	25 ohms—10,000 ohms	1/6
15 watt		2/-
15,000 ohms—50,000 ohms 5 w., 1/9; 10 w.		2/3

WIRE-WOUND POTS. 3 WATT LAB. COLVERN, ETC.

Pre-set Min. T.V. Type Knurled Slotted Knob. All values 25 ohms to 30 K. 3/- ea. 50 K., 4/-. Ditto Carbon Track 50 K. to 2 Meg., 3/-.	Standard size Pots., 2½in. Spindle High Grade. All Values 100 ohms to 50 K., 5/6; 100 K., 6/6. W/W EXT. SPEAKER CONTROL 10Ω, 3/-.

O/P TRANSFORMERS. Heavy Duty 50 mA., 4/6. Multi-ratio push-pull, 7/6. Miniature 3V4, etc., 4/6. Hygrade Push-pull 7 watts, 15/6. 5 to 510 " 6k or 8k 30/-.
L.F. CHOKES 15/10H 60/85 ma., 5/-. 10H 85 ma. 10/6. 10H 150 ma. 14/-. 5H 250 ma. 16/6.
MAINS TRANS. 350-0-350, 80 mA., 6.3 v. tapped 4 v. 4 a. 5 v. tapped 4 v. 2 a., ditto 250-0-250 80 mA., etc., 22/6. Bargain 300-0-300 v. 65 mA., 6 v. 4 a., 4 v. 2 a., 17/6.

I.F. TRANSFORMERS 7/6 pair

465 kc/s slug tuning miniature can 2½ × 1 × 1in. High Q and good band width. By Pye Radio. Data sheet supplied.
Wearite M800 I.F. Miniature 465 kc/s, 12/6 pair.
Wearite 550 I.F. Standard 465 kc/s, 12/6 pair.

HEATER TRANS. Tapped 200/250 v. 6.3 v. 1½ amp., 7/6.
ALADDIN FORMERS and cores. ½in., 8d.; 1in., 10d. 3in. FORMERS 5937/8 and Cans TV1/2. ½in. sq. × 2½in. and ¼in. sq. × 1¼in., 2/- complete with cores.
SLOW MOTION DRIVES. Epicyclic ratio 6 : 1, 2/3.
TYANA. Midget Soldering Iron. 200/220 v. or 230/250 v., 16/9. SOLON INSTRUMENT IRON. 25 w., 24/-.
MAINS DROPPERS. 3 × 1½in. Three Adj. Sliders. .3 amp. 750 ohms, 4/3. .3 amp., 1,000 ohms, 4/3.
LINE CORD. .3 amp., 60 ohms, per foot, .2 amp., 100 ohms per foot, 2 way, 6d. per foot, 3 way, 7d. per foot.

CRYSTAL MIKE INSERT by Acos

Precision engineered. Size only 1¼ × 3/16in. Bargain. Price 6/6. No transformer required.

MIKE TRANSF. 50 : 1, 3/9 ea.; 100 : 1, Potted, 10/6.
LOUDSPEAKERS P.M. 3 OHM. 2½in. square, 17/6.
5in. R.A., 17/6. 7in. × 4in. Goodmans 21/-.
3½in. Square Elac., 21/-. 8in. Plessey, 19/6.
6½in. Goodmans, 18/6. 10in. R.A., 30/-.
4in. ELAC TWEETERS, 25/-. 12in. Plessey, 30/-.
8in. M.E. 2.5 k. field tapped O.P. transformer, 24/6.
15 ohm Plessey 10 wt. 12in. with Tweeter, 97/6.
CRYSTAL DIODE G.E.C. 2/-. GEX34, 4/-. 40 Circuits, 3/-.
H.R. HEADPHONES. 4,000 ohms, brand new. 16/6 pair.
SWITCH CLEANER Fluid, squirt spout, 4/3 tin.
TWIN GANG CONDENSERS. 365 p.f. Miniature, 1½in. × 1½in. × 1½in., 10/-. .0005 Standard with trimmers, 9/-; less trimmers, 8/-. Midget, 7/6; Single 50 p.f., 2/6. Solid Dielectric 100, 300, 500 pf., 3/6 each.
VALVE HOLDERS. Pax int. Oct., 4d. EF50, EA50, 6d. B12A, CRT, 1/3. Eng. and Amer. 4, 5, 6, 7 and 9 pin, 1/-.
MOULDED Masda and Int. Oct., 6d., B7G, B8A, B8G, B9A, 9d. B7G with can, 1/6. VCR97, 2/6. B9A with can, 2/6.
CERAMIC, EF50, B7G, B9A Oct., 1/-. B7G with can, 1/9.
SPEAKER FRET. Gold Cloth 17in. × 25in., 5/-. 25in. × 35in., 10/-. Expanded metal, Silver 15½in. × 9½in., 2/-. Tygan 4ft. 6in. wide, 10/- ft.; 2ft. 3in. wide, 5/- ft.
WAFERSWITCHES. SWITCHES.

2 p. 2-way, 3 p. 2-way, short spindle	2/6
5 p. 4-way 2 wafer, long spindle	6/6
2 p. 6-way, 4 p. 2-way, 4 p. 3-way, long spindle	3/6
3 p. 4-way, 1 p. 12-way, long spindle	3/6

Wave change "MAKITS." 1 wafer 8/6; 2 wafer 12/6; 3 wafer 16/-; 4 wafer 19/6; 5 wafer 23/-; 6 wafer 26/6.
TOGGLE SWITCHES. S.P., 2/-; D.P. 3/6; D.P.D.T., 4/-.
MORSE KEYS. good quality 2/6. Buzzers 3/6.

TRANSISTORS

PRODUCT OF WELL-KNOWN MANUFACTURER

JUNCTION TYPE P.N.P.

AUDIO suitable for high gain and low frequency amplifiers, and for output stages giving up to 250 milliwatts. PRICE **10/-** Data supplied. Equivalents OC71, OC72, T83, Red Spot.

R.F. suitable for medium and low frequency oscillators, frequency changers, and I.F. amplifiers. Frequency 2.5 Mc/s. minimum. PRICE **21/-** Equivalent OC44, XA 102, Blue Spot, White Spot.



1958 RADIOGRAM CHASSIS

THREE WAVEBANDS FIVE VALVES
S.W. 16 m.—50 m. LATEST MULLARD
M.W. 200 m.—550 m. ECH42, EF41, EBC41,
L.W. 800 m.—2,000 m. EL41, EZ40
12 month Guarantee. A.C. 200/250 v., 4-way switch. Short-Medium-Long-Gram. A.V.C. and Negative feedback. 4.2 watts. Chassis 13½in. × 5½in. × 2½in. Glass Dial 10 × 4½in. horizontal or vertical available. 2 Pilot Lamps. Four Knobs, Walnut or Ivory, aligned and calibrated. Chassis isolated from mains.

BRAND NEW £10.10.0 Carr. 4/6.

TERMS: Deposit £5/5/- and 6 monthly payments of £1. MATCHED SPEAKERS FOR ABOVE CHASSIS: 8in., 17/6; 10in., 25/-; 12in., 30/-.

★ GARRARD 4-SPEED RECORD CHANGERS RC120/4H MKII MODELS ★

Brand new and fully guaranteed 12 months

AUDIO PERFECTION

Designed to play 16, 33, 45, 78 r.p.m. Records. 7in., 10in., 12in. Lightweight Xtal pick-up, turnover head, two separate sapphire styli, for Standard and L.P., each plays 2,000 records. Voltage 200/250 A.C. Latest Mixer type.

OUR PRICE **£10.15.0** each. Post Free.

Terms: Deposit £6 and 6 monthly payments of £1.
SUITABLE PLAYER CABINETS 49/6
AMPLIFIER PLAYER CABINETS 63/-

GARRARD 4-SPEED SINGLE RECORD PLAYER 4SP

£8 AUDIO PERFECTION POST FREE

Designed to play 16, 33, 45, 78 r.p.m. Records, 7in., 10in., 12in. Lightweight Xtal pick-up, GC2 turnover head, two separate sapphire styli, Standard and L.P.

EXCEPTIONAL OPPORTUNITY
MODEL 4/564

COLLARO 4-speed Single Record Player, including heavyweight turntable and lightweight Studio O Pick-up with turnover Xtal mounted on baseplate. Autostop fitted.
OUR PRICE **6gns.** Carr. 4/-
Amplifier Player Cabinets, 45/-.

BUILD THIS REPRODUCER BARGAIN
SPECIAL SINGLE PLAYER KIT
Ready for immediate assembly.

4-speed Collaro "Junior" Unit ... £4 12 6
Handsome portable case, 17½ x 13½ x 7in. £2 5 0
Ready-built 3 watt amplifier with two valves and loudspeaker £3 12 6
All available separately. Post 2/6 each.
or **£9.15.0** complete kit post free.
£3.5.0 extra with Garrard 4-speed

COSSOR COMPANION
SUPERHET MODEL 527/X FOR ALL-DRY BATTERY OPERATION

S.W.1 13.6 to 43 metres, S.W.2 42.8 to 136 metres, Medium 187 to 575 metres.
A fine all-wave receiver giving world-wide reception on three wavebands. Operation is from a single dry battery, very economical low consumption valves DK92, DF96, DAF96, DL96.
6in. ELLIPTICAL LOUDSPEAKER
The cabinet is attractively presented in maroon and beige with gold trimmings.
SIZE 9½ × 6½ × 4½in. Leaflet S.A.E.
OUR PRICE **£6.6.0** (Battery 17/6 extra)
Carriage and insurance 4/-

TELETRON AJAX CRYSTAL SET

Complete kit with cabinet 4½ × 3 × 1½in. All components and instructions. 15/- or 30/- with pair of lightweight H.R. headphones to match.

48-hour postal Service.

Our written guarantee with every purchase. Please address all Mail Orders correctly as below

THE HI-GAIN BAND 3 PRE-AMP.

Cascode circuit using Valve ECC84. Complete kit 29/6 less power; or 49/6 with power pack kit. Plans only 1/6.

Volume Controls

Midget size
Long spindles. Guaranteed 1 year. All values 10,000 ohms to 2 Meg.
No Sw. D.P.Sw.
3/- 4/9
Linear or Log Tracks.

80 ohm CABLE Coaxial

Semi-air spaced Polythene insulated ¼in. dia. Stranded core. Ideal Band III. 9d. yd. Losses cut 50%.
FRINGE QUALITY AIRSPACED.... 1/6 yd

COAXIAL PLUGS	1/-	DOUBLE SOCKET	1/3
SOCKETS	1/-	OUTLET BOXES	4/6

BALANCED TWIN FEEDER per yd. 6d. 80Ω or 300Ω.
TWIN SCREENED BALANCED FEEDER 1/6 yd., 80 ohm.
TRIMMERS. Ceramic, 30, 50, 70 pf., 9d. 100 pf., 150 pf. 1/3. 250 pf., 1/6. 600 pf., 750 pf., 1/9. Philips, 1/- ea.

ALUMINIUM CHASSIS. [18 s.w.g. Plane, undrilled with 4 sides, riveted corners and lattice fixing holes' with 2½in. sides. 7 × 4in., 4/6; 9 × 7in., 5/9; 11 × 7in., 6/9; 13 × 9in., 8/6; 14 × 11in., 10/6; 15 × 14in., 12/6; and 18 × 16 × 3in., 16/6.
BLACK CRACKLE PAINT. Air drying, 3/- tin.
P.V.C. CONN. WIRE, 10 colours, single or stranded, 2d. yd.
NEON MAINS TESTER SCREWDRIVERS, 5/-.
SOLDER RADIOGRADE 3 yds. 9d. ½ lb. 2/6.

12/6 PURETONE RECORDING TAPE

1,200 ft. on standard fitting 7in. metal reels
Spare Reels 5½in. plastic, 3/-; 7in. plastic, 4/-.
SUPERIOR 1,200ft. Plastic Tape 21/- on 7in. plastic reels.

SENTERCEL RECTIFIERS. R.H.T. TYPE FLY-BACK VOLTAGES. K3/25 2 kV., 5/-; K3/40 3.2 kV., 7/-; K3/45 3.6 kV., 7/6; K3/50 v. 4 kV., 8/-; K3/100 8 kV., 14/6. 50 c.p.s. Voltage 30% of above.
MINIATURE CONTACT COOLED RECTIFIERS. 250 v. 50 m/a., 7/6; 60 m/a., 8/6; 85 m/a., 9/6.
COILS. Wearite "P" type, 3/- each. Osmor Midget "Q" type adj. dust core, from 4/- each. All ranges.
TELETRON. L. and Med. T.R.F., with reaction, 3/6.
FERRITE ROD AERIALS. M.W., 8/9; M. and L., 12/6.
T.R.F. COILS A/HF, 7/- pair. H.F. CHOKES, 2/6.

JASON F.M. TUNER COIL SET, 26/-. H.F. coil, aerial coil, Oscillator coil, two I.F. Transformers 10.7 Mc/s., Detector transformer and heater choke. Circuit and component book using four 6AM6, 2/-. Complete kit with Jason calibrated dial and valves, £6/15/-. Mercury Switched FM Tuner Kit, £9/19/6.

CONDENSERS. New stock. .001 mfd. 7 kV. T.C.C., 5/6. Ditto 20 kV., 9/6; 100 pf. to 500 pf. Micas, 6d.; Tubular 500 v. .001 to .01 mfd., 9d.; .05 .1, 1/-; .25, 1/6; .5, 1/9; .1/350 v., 9d.; 0.1 mfd. 2,000 v., 3/6; 0.01 mfd. 2,000 v. 1/9.
CERAMIC CONDS. 500 v. .3 pf. to .01 mfd., 10d.
SILVER MICA CONDENSERS. 10%, 8 pf. to 500 pf., 1/-; 600 pf. to 3,000 p.f., 1/3. CLOSE TOLERANCE (± 1 pf.) 1.5 pf. to 47 pf., 1/6. DITTO 1% 50 pf. to 815 pf. 1/9; 1,000 pf. to 5,000 p.f., 2/-.

NEW ELECTROLYTICS. FAMOUS MAKES.

TUBULAR		TUBULAR		CAN TYPES	
1/350 v.	2/-	100/25 v.	3/-	8+16/450 v.	5/-
2/450 v.	2/3	8+8/450 v.	4/6	16+16/450 v.	5/6
4/450 v.	2/3	16+16/500 v.	6/-	6,000 mfd. 6 v.	6/6
8/450 v.	2/3	CAN TYPES		32+32/350 v.	4/6
8/500 v.	2/9	Clips	3d.	32+32/450 v.	6/6
16/450 v.	3/6	16/450 v.	3/6	64+120/275 v.	7/6
16/500 v.	4/-	16/500 v.	4/-	80+100/350 v.	11/6
32/450 v.	5/6	32/350 v.	4/-	100+200/275 v.	12/6
25/25 v.	1/9	100/275 v.	5/6	1,000+1,000/6 v.	6/6
50/25 v.	1/9	50+50/350 v.	7/-		
50/50 v.	2/-	500/12 v.	3/-		

FULL WAVE BRIDGE SELENIUM RECTIFIERS. 2, 6 or 12 v. 1½ amp., 8/9; 2 a., 11/3; 4 a., 17/6.
CHARGER TRANSFORMERS. Tapped input 200/250 v. for charging at 2, 6 or 12 v. 1½ a., 15/6; 2 a. 17/6; 4 a., 22/6. Charger circuit free on request.

VALVES
All boxed — New & Guaranteed

1R5	8/6	6K8	8/6	EA50	1/6	EZ81	11/6
185	8/6	6L6	10/6	EABC80	10/6	E1148	1/6
1T4	8/6	6Q7	10/6	EB91	6/6	HABC80	12/6
2X2	2/6	6SA7	10/6	EBC33	8/6	HVR2A	7/6
3S4	8/6	6S7M	10/6	EBC41	10/6	MU14	10/6
3V4	8/6	6SN7	8/6	EBF80	10/6	P61	6/6
5U4	8/6	6V6G	7/6	ECC84	12/6	PCC84	12/6
5Y3	8/6	6V6GT	8/6	ECF80	11/6 each	PCF80	11/6 each
5Z4	10/6	6X4	7/6	ECF82	each	PCF82	
6AM6	8/6	6X5	7/6	ECH42	10/6	PCL82	
6B8	5/6	787	10/6	ECL82	12/6	PEN25	6/6
6BE6	7/6	12AH8	10/6	EF39	7/6	PL82	10/6
6BH6	10/6	12AT7	10/6	EF41	10/6	PY80	10/6
6BW6	10/6	12AU7	9/6 each	EF50	5/6	PY81	10/6
6CH6	10/6	12AX7		Equip.		PY82	10/6
6D6	7/6	12BE6		EF50	8/6	SP61	5/6
6F6	7/6	12BH7	10/6	Sylv.		UBC41	10/6
6H6	3/6	12K7	8/6	EF80	10/6	UCH42	10/6
6J5	6/6	12Q7	8/6	EF92	5/6	UF41	10/6
6J6	7/6	35Z4	9/6	EL32	5/6	UL41	10/6
6J7	8/6	80	10/6	EL84	10/6	UY41	10/6
6K6	6/6	807	6/6	EY51	12/6	U22	10/6
6K7	5/6	954	1/6	EZ40	10/6	X79	10/6

RADIO COMPONENT SPECIALISTS

337 WHITEHORSE RD., WEST CROYDON
OPEN ALL DAY—(Wed. 1 p.m.) CATALOGUE 6d.

TEL. THO 1655. Buses 133 or 68 pass door. S.R. Stn. Selhurst. *P. & P. 1/-, £2 orders post free (Export extra). C.O.D. Service 1/6. Export C.W.O. post extra, no H.P.*

XUM

SOUND AND ITS REPRODUCTION

We can supply, ex-stock against early orders, the following instruments and accessories. Post Free to any address. Everything listed is "QUALITY" tested. Full Hire Purchase and Credit Terms available with complete confidence.

ACOUSTICAL: Quad II Amplifier and Control Unit, £42; Quad II F.M. Tuner, £30/9/-. ALTOBASS 2000 Loudspeaker in E.M.-Plan Cabinet, 39½ gns. COLLARO 4T200 Unit fitted with Expert P.U. £37. COSMOCORD Black Shadow Pick-up. Details available soon. DULCI: Dulci-Harting Deck and pre-amplifier, 55 gns. E.M. PLAN: II Trovatore Loudspeaker. Complete Carmen. Your choice of Tape Deck or Transcription Unit, matched amplifier and control unit. From 69 gns. EXPERT Acoustic Column £33. GARRARD 301 Transcription Unit with Expert P.U., arm. £50. G-PLAN: T.932Q Cabinet with amplifier and control unit, 44 gns; T.933Q Loudspeaker Cabinet (felted), 28½ gns.; T.933Q complete, 52 gns. Librenzas quoted against firm enquiry. HEAL: Quad Chairside Cabinet, fitted with Acoustical equipment. Space for Record/Tape units, 100 gns.; Standard Fireside Cabinet, 75 gns.; Fitted with Thermionic Amplifier, space for Record/Tape units, 75 gns. Other amplifiers fitted to customer's order Sc.E.: Your Tape Recorder deck can be aligned to within a 2,000 part of an inch. We have arranged with Scientific Engrg. to have customer's decks corrected, improved, adapted and aligned. Prices from 4 gns. AURIOL, B.S.R., BRENELL, BURNE-JONES, CHAMPION, CHAPMAN, G.E.C., GOLDRING, GOODMANS, GOODSELL, JASON, LEAK, LOWTHER, LUSTRAPHONE, MAESTROVOX, MAGNETIC RECORDING, MULTICORE, NORMANDA, ROGERS, SHIRLEY, SIMON SOUND, TAPE RECORDERS LTD., THERMIONIC PRODUCTS, TRUVOX, TUTOR TAPES, VERITONE, WATTS, WOLSEY, WRIGHT & WEAIRE.

STOP PRESS!

THE MODEL V. VERITONE TAPE RECORDER. *Superimposition — Mixer Unit — Rola Celestion Speaker* **52 gns. complete**

LATEST INSTRUMENTS DIRECT FROM THE AUDIO FAIR

J. C. HIBBERT 23 WALTER ST. CHESTER

Mamma Mia!

SONOMAG

Continental

Grand Prix styling and amazing performance meet in the new **Continental Style Sonomag.** New, more sensitive, **Lustrette** microphone, famous Collaro Mark IV 3-speed deck—refinements normally costing much more. Write for full trade terms and literature. Call and hear the new Continental Sonomag. A revelation in portable performance.

Viva!
only 56 gns.

SONOMAG LTD.
2 St. Michael's Road, Stockwell, S.W.9. Tele: BRI 5441/3

MINIATURE COILS

FOR TRANSISTOR RADIO CIRCUITS

These are the smallest screened coils available on the British market or the Continent.

DIMENSIONS:—

Height (Excluding Lugs) ..	5/8in.
Diameter (Top)	9/16in.
Diameter (Base)	5/8in.

★Latest high-efficiency ferrite pot cores and litz windings.

★High Q for maximum gain and selectivity.

★Coupling ratios carefully designed to match latest R.F. transistors. I.F.—460/470 Kc/s.

★Low-loss moulded nylon formers.

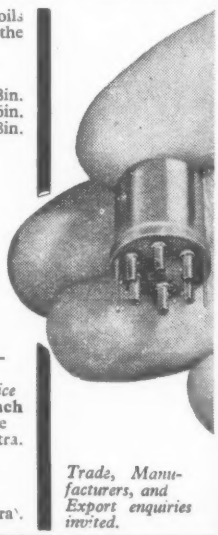

THREE TYPES AVAILABLE:—

List		*List Price*
735	Oscillator Coil	11/3 each
736	1st or 2nd I.F. transformer.	postage 6d. extra.
737	3rd I.F. transformer	

Connection diagram supplied.

DELIVERY: Ex Stock.

C.W.O., or C.O.D. (1/6d. extra).

Trade, Manufacturers, and Export enquiries invited.

Orders and enquiries direct to the manufacturers :—

CHANNEL ELECTRONIC INDUSTRIES LTD.
COMPONENTS DIVISION
DUNSTAN ROAD BURNHAM-ON-SEA, SOMERSET. Phone 3167.

Best Buy at Britain's

MONITOR TYPE 61. 3½in. C.R. Tube. AC mains power pack. Very modern design. Ideal for conversion to Oscilloscope, full data supplied. Condition as new. **£8/19/6**, carr. 15/-.

TRANSMITTER TYPE 36. A complete 50 Watt transmitter for phone or CW. Covers 10-40 Mc/s. Tested and ready to plus into A.C. mains. **£12/10/-**, carr. 30/- Eng. & Wales. For full details see previous adverts or send S.A.E.

VHF TRANSMITTERS. BC-950A-130 100-150 Mc/s., 4 channel, crystal controlled transmitter. Complete with valves-2 of 1625, 2 of 832A, 1 of 815 (modulator). **BRAND NEW.** In original American packing. (Xtal not supplied). **£5/19/6.** Carr. 7/6.

BEACON TRANSMITTER-RECEIVERS RT37/PPN2. Contains 5 3A5, 3 1S5, 1 1S5, and two 2 Volts vibrapacks. Complete in haversack with telescopic mast antenna, lightweight phones, manual, etc. **BRAND NEW.** Special reduced price, **65/-**, carr. 7/6.

AVOMETER MODEL D. 34 ranges. Large size AVO. For full details see previous adverts. Thoroughly overhauled. Complete with batteries and instructions. **£8/19/6**, post 4/-.

SANGAMO-WESTON ANALYSER E772. A useful multi-range meter in Rexine covered carrying case. Thoroughly overhauled and in perfect working order. For full details see previous adverts. **10 Gns.**, carr. 4/-.

TRIPLETT COMBINATION TESTERS. Valve tester and multimeter combined. 10,000 ohms per volt. Complete with batteries, instructions, and tested ready for use on A.C. mains. **BRAND NEW. £14/19/6**, Carr. 7/6. See illustrated advert. p. 140 May W.W.

MULLARD C. & R. BRIDGES. 0.1 Ohm. to 10 Megohms in 4 ranges; 10 pFd. to 10 mFd. in 3 ranges; Calibrate, Open Bridge, and % ranges. For 100-250 V. A.C. mains. Tested and guaranteed. **£7/10/-.** Post 3/6.

ADMIRALTY HF TRANSFORMERS. Pri. 230 V. 50 c/s. Secs. 620-550-375-0-375-550-620 V. (620 and 550 V. 200 m/Amps., 375 V. 250 m/Amps.), plus two 5 V. 3 Amp. rectifier windings. Total rating 278 VA. Upright mtg. Wt. 25 lbs. Made 1953. **BRAND NEW.** Original boxes. **45/-.** Carr. 5/-.

MAINS ISOLATING TRANSFORMERS (Vortexion). Fully shrouded. For testing A.C./D.C. sets in safety. 230 v. input. Output 230 v. 100 watts, **22/6.** Post 2/6.

DUAL PURPOSE TRANSFORMERS (Gresham). Pri. 230/250 v. Secs., 240-0-240 v. 1.5 amps., 5 v. 12.5 amps., 5 v. 1.75 amps. Ideal for ISOLATING TRANSFORMER, to obtain TWO 240 v. 360 watt lines. Potted, oil-filled, 7 x 7½ x 10½in. high. Wt. 50 lb. **BRAND NEW. £3/10/-.** Carr. 10/-.

MARCONI LOOP AERIAL type 696. A small, compact, enclosed loop. On swivel mount with degree scale. **BRAND NEW. 69/6.** Post 2/6. Ideal for R1155, etc.

BATTERY CHARGERS. Input 230 v. A.C. Output 12 v. D.C., 1.5 amps. In neat grey metal case, 7 x 6 x 5in. **BRAND NEW, 35/-.**

CRYSTALS. 200 Kc/s. American GEC, 10/- each. 100 Kc/s. RCA bars, **15/-.**

SANGAMO-WESTON VOLTMETERS S61. Dual range 0-5 & 0-100 V. D.C. FSD 1 mA. 3in. scale. Recent manufacture. Ideal for schools. Complete in super quality canvas carrying case, with test prods and leads. **BRAND NEW.** Boxed. **27/6.** Post 2/6.

HRO SENIOR MODELS

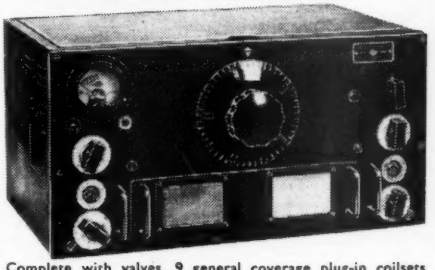

Complete with valves, 9 general coverage plug-in coilsets 50 Kc/s. to 30 Mc/s., instruction booklet, and circuit, but less external power supply unit.
Table models, as new condition, 21 GNS. Rack Mounting, **18 GNS.** Packing and carriage 22/- extra.
Send S.A.E. for further details.

METER BARGAINS

RANGE	TYPE	SIZE		PRICE
50 Microamp.	D.C. M/C	2½in.	Flush Circ., scaled 0-100	59/6
100 Microamp.	D.C. M/C	2½in.	Flush Circ.	42/6
100 Microamp.	D.C./M.C	2½in.	Flush Circ., scaled "Mega."	39/6
500 Microamp.	D.C. M/C	2in.	Flush Circ. Ex 19 Set	12/6
1 Milliamp.	D.C. M/C	2in.	Flush Square. Fe/NFe.1954	22/6
1 Milliamp.	D.C. M/C	2½in.	Flush Circ. Made 1954	25/-
1 Milliamp.	D.C. M/C	3½in.	Flush Circ.	35/-
1 Milliamp.	D.C. M/C	6in.	Flush Circ. Scaled 0-12 v.	79/6
200 Milliamp.	D.C. M/C	2½in.	Flush Circular	10/6
1 amp. Thermocouple		2½in.	Projecting Circular	6/9
1 Amp. Thermocouple		2½in.	Flush Circular	7/6
4 Amp. Thermocouple		2in.	Flush Square	6/9
15 Volts	A.C. M/I	2½in.	Flush Circular	8/6
300 Volts	A.C. M/I	6in.	Flush circular. Made 1955	79/6
300 Volts	A.C. M/I	2½in.	Flush Circular	25/-
500 Volts	A.C. M/I	2½in.	Flush Circular	25/-
40 Amperes	D.C. M/C	2in.	Flush Circular	7/6

METER RECTIFIERS. Full wave bridge. Brand new, Salford 1 mA. **6/6.** 5 mA., **6/6.** STC 2 mA., **5/6.**

AMERICAN METERS. Triplett 100 microamp., 4in. meters, scaled as multimeter, exactly as used in Combination Tester. Brand new, boxed, **79/6.** Post 1/6.
Triplett 100 microamp. 3in. square, flush mtg. Scaled as output meter, 1.5 and 0-6 volts A.C. Rectifier not fitted. Brand new, boxed, **42/6.** Post 1/-. Westinghouse 0-5 Milliamp D.C., flush mtg., circular, 2in. blank black scale. Brand new, boxed, **8/6.** Post 1/-.

AMERICAN MULTIMETERS

A good general purpose portable meter by Precision, U.S.A. Basic, FSD 400 micro-Amps. Ranges: A.C. and D.C. volts 0 to 12, 60, 300 600, 1,200 and 6,000; D.C. milli-Amps. 0 to 1.2, 12, 60 and 600; Ohms, 0 to 5 K. 500 K. and 5 Meg. — 10 to + 16 dB. In polished wooden case with carrying handle and compartment for leads, etc. Size 7½ × 7½ × 5½in. Complete with batteries, tested and guaranteed. **£6/19/6.** Post 2/6.

ADMIRALTY POWER UNITS. Equivalent to AM234. Input 200-250 v. 50 c/s. A.C. mains. Outputs 240 v. D.C. 125 m/Amps. and 6.3 v. A.C. 6 amps. Dual purpose 2½in. panel mounted 300 v. meter reads input and H.T. volts. Double smoothing with paper capacitors. Standard 19in. rack mounting. **BRAND NEW. 79/6.** Carr. 7/6.

MEGGERS

Evershed and Vignoles Wee Meggers. 500 Volts. Complete in leather case, with leads and instruction booklet. **BRAND NEW, £12/10/-.** Ditto as new, **£8/19/6.** Ditto, but 100 Volts. **BRAND NEW £6/10/-.**
E. & V. SERIES 2 MEGGERS. 500 Volts. 0-100 Megohms. In leather case. First class condition. **ONLY £16.**
INSULATION TESTERS by Record Electric. 500 Volts. 0-50 Megohms. Tested and guaranteed. **ONLY £8/10/-.**

MINIATURE 373 IF STRIPS. For FM tuner described in "Practical Wireless." Complete with 3 of EF91, 2 of EL92 and 1 of EB91. A fresh release enables us to offer these once again. **BRAND NEW.** Complete reprint of conversion instructions and circuit supplied free. **42/6.** OR less valves, **12/6.** Post, either, 2/6.

MARCONI SIGNAL GENERATORS

85 Kc/s. to 25 Mc/s. A.C. mains operation. In fair condition and working order. TF144F, **£45.** TF144G, **£50.**

CR100 SPARES KITS

Contents: 15 valves, 2 of U50, DH63, KT63, X66, and seven KTW61 or KTW62. Output transformer, Resistors, Condensers, Potentiometers, PK screws, pilot lamps, drive cord, etc. etc. **ALL BRAND NEW. 59/6.** Post 4/6.

CHARLES BRITAIN (Radio) Ltd.

11 UPPER SAINT MARTIN'S LANE
LONDON, W.C.2. *TEMple Bar 0545*
One Minute from Leicester Sq. Station (up Cranbourn St.)
Shop Hours: 9-6 *p.m.* (9-1 *p.m. Thursday*) *Open all day Saturday*

R1155 RECEIVERS. Model "B" with latest type SM drive. In good condition and perfect working order. Realigned and air-tested. S.A.E. for details of power packs, etc. **£7/19/6.** Carr. 10/6.

TECHRAD AMPLIFIERS (U.S.A.). High sensitivity, suitable for crystal, moving coil, or ribbon microphones/pickups, etc. Output 12 watts into 600-15-7.5-5.2.5 ohms. Complete with four 6J7 met., two 6L6GA, one 5U4G, and ready for use on 200-250 V. A.C. mains. In grey crackled steel case, 17 x 10 x 10in. Absolutely **BRAND NEW £13/10/-.** Carr. 10/-.

BENDIX MODULATOR/POWER UNITS. Type MP-28-8A, for TA-12 transmitters. With 24 V. D.C. input, 540 V. D.C. 450 m/a. output dynamotor, 6N7met Mic. Amp., 6F6met Driver, and two 807 P.P. Modulators. Complete with Mic. Transf. and Mod. Transf. for modulating two parallel 807's. Brand new **79/6.** Slightly soiled **69/6.** Carr. 7/6.

DYNAMOTORS. As used in the above. Brand new **32/6.** Used **19/6.** Wt. 13lb. Carr. 4/-.

MARCONI TF.340 OUTPUT METERS. Perfect working order. **£29/10/-.**

TRIPLETT MULTIMETERS

25 Ranges: 0 to 5, 25, 100, 250, 1,000, and 5 kV. D.C. (20,000 OPV); 0 to 5, 25, 100, 250, and 1,000 v. A.C. (1,000 OPV); 0 to 50 microA, 1, 10, 100 and 500 mA 1 and 5 amps D.C.: 0 to ¼, 1, 5 and 10 amps. A.C.; 0 to 1,000, 100 K, and 10 megohms. Square meter, size 4 x 4in. Contained in 11¼ x 8 x 5¼in. wooden case, weight 10lb. Supplied complete with instruction book, batteries, leads and special high voltage leads. **BRAND NEW** ready for use and fully guaranteed **15 gns.** Post 5/-.

VIBRATOR PACKS. Input 6 v. D.C. Output approx. 100 v. D.3. at 30 m/amps., fully smoothed and R.F. filtered. Size 6½ x 5 x 2in. Fitted with Mallory 629C vibrator. **BRAND NEW.** Boxed. **12/6.**
ANOTHER, but 200 v. D.C. 100 m/amps. With OZ4 valve and vibrator. **BRAND NEW.** Boxed. **25/-.**

RCA OUTPUT TRANSFORMERS. As used in MI-11220 Amplifier. Primary for push-pull 6L6's. Secondaries 5, 7.5, 15, and 600 ohms, and tertiary for NEB. 25 watts power rating. Potted construction, with tag connections Full circuit of RCA amplifier supplied. **BRAND NEW, 27/6.** Post 2/-.

AR77 MAINS TRANSFORMERS. Fully shrouded, drop-through 3¾in x 3¼in. Primary 110/125/150/210/240 v. 50-60 c/s. Secs., 325-0-325 v. 100 m/amp., 6.3 v., 3.5 amp., and 5 v. 2 amp. **BRAND NEW** ex-U.S.A., **29/6.**

MINIATURE STC RELAYS. 250 ohms coil. DP C/O (double silver contacts). 1¼ x ⅝ x ¾in Wt. one oz. 6 v. operation. **7/6.**

USA RELAYS. 25 Ohms coil operates from 3 Volts. 4 pole C/Over and 1 make. Brand new. Boxed. **8/6** post paid.



RCA TE-149 HETERODYNE WAVEMETERS. Employs V-cut 1 Mc/s. crystal (0.005%). Overall accuracy better than 0.02%. Dial DIRECTLY calibrated every 1 Kc/s. from 2.5-5 Mc/s. Useful harmonics up to 20 Mc/s. Provision for fitting internal dry batteries. As new, in original transit case. **£9/19/6.** Carr. 5/6.

BARGAINS IN TEST EQUIPMENT



PRECISION SERIES 834-S (U.S.A.). Multi range tester for A.C./D.C. volts, ohms and milliamps. Basic movement 400 micro-amps. Housed in wooden box with lid and carrying strap. Overall size 7½ × 7in. × 5in. Complete with test prods, batteries, etc. Ready to use. **£6/19/6.** Post 2/6.

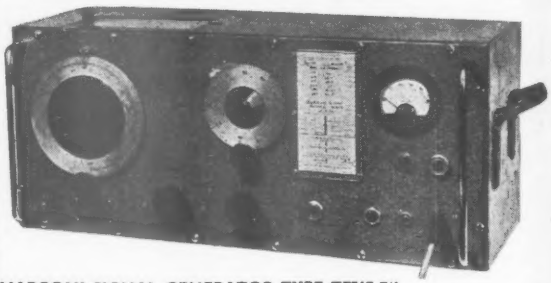

MARCONI SIGNAL GENERATOR TYPE TF517-F/1. Covering 10–18 Mc/s, 33–58 Mc/s, 150–300 Mc/s. Used but in very good condition. Complete with full technical data and instructions. Limited quantity. Unrepeatable at only **£12/10/-.** Carr. 20/-. ALSO AVAILABLE—ditto—but covering 18–33 Mc/s instead of 10–18 Mc/s band. SAME PRICE.

VALVE TESTER, TYPE 4.

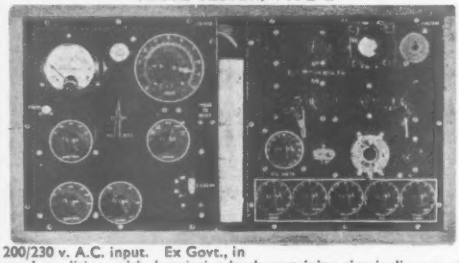

200/230 v. A.C. input. Ex Govt., in good condition, with descriptive book containing circuit diagram of instrument and how to test valves from 1.4 v. to 40 v. With valve holders for Brit., 4, 5, 7 pin and Octal, U.S., 5 and 7 pin, I/Octal, side contact large Brit., 4 and 9 pin. Acorn and diode. Housed in substantial wooden case with hinged lid. **£7/19/6.** Carr. 10/-.



EVERSHED & VIGNOLES Series II 500 v. Megger Insulation Tester, with leather carrying case. As new. **£20.** Carr. Paid.

EVERSHED & VIGNOLES MEGGER CIRCUIT TESTER (low reading ohm meter). 2 ranges. 0–3, 0–30 ohms. The perfect meter for continuity and polarity testing. Complete with test leads and ready to use. Brand new. Only **£4/17/6.** P. & P. 3/-.

● **GEE (BROS.) RADIO LTD.** ● *SEE ADVERTISEMENT OPPOSITE*

THE
BRITISH NATIONAL RADIO SCHOOL
ESTD. 1940

NOW IN OUR SEVENTEENTH YEAR AND STILL
NO B.N.R.S. STUDENT HAS EVER FAILED
to pass his examination(s) after completing our appropriate study course

A.M.Brit.I.R.E., CITY and GUILDS, and P.M.G. EXAMINATIONS and now

Another B.N.R.S. "FIRST"

MORSE TUITION. *RECEPTION* with L.P. Records

***"SENDING"* monitored by telephone and tape recorder. A complete service.**

Our Principal will personally check your "sending" by telephone on his tape recorder and will return to you a morse inker copy of your "sending" with his criticism and advice.

Please write for full details.

PRINCIPAL,
BRITISH NATIONAL RADIO SCHOOL
66 ADDISCOMBE ROAD, CROYDON, SURREY
Tel. ADDiscombe 3341

BRADMATIC

HIGH QUALITY TAPE RECORDING EQUIPMENT

OUR RANGE OF TAPE DESKS

Model 5D	(Taking up to 10½in. reels)	£50. 0. 0
Model 5CL	" " " 9½in. "	£47. 10. 0
Model 5CS	" " " 9½in. "	£45. 10. 0
Model 5B	" " " 7in. "	£42. 0. 0

All with two speeds, 3¾ and 7½ i p.s. Three half track heads. Three heavy duty motors.
Desks also available fitted with stereophonic heads suitable for playing back E.M.I. "Stereosonic" tapes.

OUR RANGE OF MAGNETIC HEADS

HALF TRACK	
Standard (.970in. dia.)	Type 6RP Super Rec/Play
	Type 5RP Rec/Play
	Type 5R Record
	Type T5E Erase
Miniature (15 mm. dia.)	Type M6RP Super Rec/Play
	Type M5R Record
	Type M5E Erase
FULL TRACK (.970 dia.)	Type 6RPF Super Rec/Play
	Type 5RPF Rec/Play
	Type 5RF Record
	Type 5EF Erase

All the above heads are high impedance but low impedance heads can be wound at extra cost.
Two types of fixing stem available. Screening Cans available.

AMPLIFIERS

Our type 10 Record/play amplifiers have an overall frequency response of 30—15,000 cycles within 4 db. unweighted. Details on application.

Send for lists. Private and Trade supplied.

BRADMATIC LIMITED
STATION ROAD ASTON BIRMINGHAM, 7
Phone: EAST 2881-2 *Grams: Bradmatic, Birmingham*

Hours of Business:
9-6 Weekdays
9-1 Saturday

GEE Bros. RADIO Ltd.

ADJOINING
LEICESTER SQ.
TUBE STATION

15, LITTLE NEWPORT STREET, LONDON, W.C.2. Telephone: GERrard 6794/1453

SPECIAL TERMS FOR QUANTITIES—EXPORT ORDERS PROMPTLY EXECUTED

ROTARY CONVERTER (as illustrated). Ex-Govt. 12 v. D.C. input 230 v. A.C. Output 50 cycles at 135 watts. Complete in carrying case with lid, voltage control, sliding resistance, mains switch and 0–300 v. A.C. flush meter. In perfect working order, £10, carr. 10/–.

ROTARY CONVERTER. 12 v. D.C. to 230 v. A.C. 50 cycles, 100 watts. Fully tested. **£6/9/6.** Carr. 7/6. Ditto 24 v. D.C. **£4/17/6.** Carr. 7/6.

ROTARY CONVERTER. 110 v. D.C. to 230 v. A.C. 50 cycles, 300 watts. Fully smoothed and suppressed. Housed in strong steel cabinet complete with carrying handles. Absolutely brand new and unused, **£15.** Carr. 10/–.

CONDENSERS. 2 mfd. 7.5 kv. wkg. at 15 kv. Good condition. **£2/10/–**, carr. 10/–.

SELENIUM METAL RECTIFIERS. F/B.

6 or 12 v. 1 amp.... 7/6	24 v. 1 amp.....13/6
12 v. 2 amp.....10/–	24 v. 2 amp.....20/–
12 v. 2½ amp.....15/–	24 v. 2½ amp.....25/–
12 v. 4 amp.....16/6	24 v 4 amp.....30/–
12 v. 6 amp.....23/6	24 v. 6 amp.....35/–
12 v. 10 amp.....40/–	24 v. 10 amp.....80/–

AMPLIFIER. 12 v. D.C. For Mobile and Outdoor operation. Powered by Vibrator and Rectifier with 2-EL35's or 6L6's in push pull. Output 18 watts approx., fitted for mike and gram inputs. A sound and practical unit in good condition for only **£12/19/6.** Carr. 5/–. This amplifier if used with our large Re-Entrant Loud Hailer (as illustrated) together with two of our 6 v. 40 AH or 125 AH batteries and a crystal microphone (MIC 35 at 25/-) will make a complete outdoor 12 v. unit ready for use. If all above items are purchased together a 5% discount will be allowed off the total cost.

TRANSMITTER-RECEIVER No. 19. Mk. II complete with 15 valves. Frequency range A set 2-8 meg., B set 230-240 Mc/s., in good condition. **£2/19/6.** Carr. 10/6. 12 V. ROTARY POWER UNIT for above, **£1.** Carr. 5/–. All leads, headsets, variometers, etc., available.

CATHODE RAY TUBES. VCR139A 2½in., 30/–; 3BP1, 3in., 30/–; 5FP7, 5in., 35/–; VCR97, 6in., 20/–; all new and unused. P. & P. 3/– each.

18/24 v. 10 AMP. BATTERY CHARGERS for 200–250 v. 50 cycles input, metered, switched and fused. As new, **£12/10/–.** Carr. 20/–.

A.C.-D.C. RECTIFIER POWER SUPPLY UNIT. 230 v. A.C. 50 cycles input. 100 v. D.C. output max. 2½ amp. **£4/10/–.** Carr. 7/6.

C.M.G. 25 PHOTO CELLS (OSRAM). Brand new. 15/–. P. & P. 1/–.



RE-ENTRANT LOUD HAILERS (Ex-Govt.)

Heavy duty 20 watts all-metal 15 ohms. Diameter 15in., length 15in. (approx.). Perfect condition. **£6/10/–.** Carr. 10/–.

TRANSFORMERS

RCA PLATE TRANSFORMERS. 190 to 250 v. primary. 50–60 cycles. Secondary 1,500–0–1,500 or 2,000–0–2,000, at 1.75 kVA. Brand new and boxed. **£12/10/–.** Carr. 10/–.

VARIAC TRANSFORMER. 230 v. 50 cycles input, controlling 0–230 v. continuously at 9 amps. Perfect order. **£12/10/–.** Carr. 10/–.

DITTO, smaller type. 0–250 v. input controlling from 200–230 v. at 7 amps. **92/6.** Carr. 5/–.

200 WATT AUTO-TRANSFORMER. 230–115 v. Fully shrouded, new and unused. **24/6.** P. & P. 2/6.

L.T. TRANSFORMERS. Pri. 200–250 v. 50 cycles A.C., Sec. 17.5 v. at 35 amps. **£4/15/–.** Carr. 10/–.

TRANSFORMER (FERRANTI). Potted for 0–250 v. 50 cycles tapped primary, sec. 1,250 v., 15 mA. Ideal for oscilloscopes, etc. Size 3½×3½×4½in. ONLY **35/–.** P. & P. 2/6.

E.H.T. TRANSFORMERS. 3,850 v. at 50 mA. with two additional 4 v. L.T. windings for 230 v. 50 cycles primary. New and boxed. **£3/15/–.** Carr. 5/–.

VARIABLE VOLTAGE REGULATOR TRANSFORMERS. Input 230 v. A.C. at 21 amps. Output 57.5 volts in 16 equal steps to 230 v. at 21 amps. Ex-Govt., in perfect condition. **£12/10/–.** Carr. 15/–.

TRANSFORMERS. 110–230 v. Pri. Sec. 26 v. tapped to 41 v. at 14 amps. New and boxed. **£3/10/–.** Carr. 5/–.

CAR RADIO VIB. TRANSFORMERS. 6 v. Input 280 v. at 80 mA. H.T. (ex-Philco). New, in perfect condition. **12/6.** P. & P. 2/–. Ditto 12 v., same price.

E.H.T. TRANSFORMER. 20 kV. at 140 mA. 230 v. 50 cycles primary. New and unused. Ex-Govt. Built to the highest specification. **£22.** Carr. 30/–.

TRANSFORMER. 1,800–0–1,800 at 1 kVA. 230 v. 50 cycles primary. Fully tropicalised. New and boxed. **£8/15/–.** Carr. 10/–.

SPECIAL VALVE OFFER. CV138 (6AM6, EF91, etc.). CV140 (EB91, D77, etc.), CV136 (EL91, 6AM5, etc.), **6/6** each. Post 6d. (4 or more sent post paid).

OLDHAM MINERS' LANTERN (all steel). 9½in. tall, 3½in. dia. Complete with bulb and rechargeable accumulator. Ideal inspection lamp for garages, outhouses, etc. **19/11.** Post 2/6.

RECORDING WIRE. ¼ lb. spools, 3½in. dia. New and unused, 9/–. P. & P. 1/–.

MORE BARGAINS IN TEST EQUIPMENT

METERS. 0–1 mA. 2in. circular F/M, **17/6.** Ditto 2½in., **25/–.** 0–50 microamps. D.C. m/c., projecting 2½in. round, **49/6.** 0–10 mA. A.C. m/c., retcifiers, F/M 3½in., round **49/6.** 0–300 v. A.C. 2½in. F/M, **25/–.** 0–200 v. A.C. 3½in. F/M. **25/–.** 0–300 v. A.C. 3½in. F/M, **25/–** each.

RECORD MEGGERS. 500 v. insulation tester, 0–50 megohms. In leather case, good condition. **£8.**

TEST SET TS-26/TSM. This volt ohmmeter is the correct tester for EE8 telephones and all standard telephone equipment. Brand new and boxed, with full technical data and calibration charts. **£7/10/–.**

EVERSHED AND VIGNOLES WEE MEGGER 500 v. New and unused. Only **£12/10/–.** Ditto 250 v. **£10/10/–.** P. & P. 3/– on each.

AVO TEST BRIDGE. A.C. mains operated from 200–250 v. Will test resistance from 5 ohms to 50 megohms and capacity from .00001 to 50 mfds. A most useful instrument for everyday uses. Our price ONLY **£7/19/6.** P. & P. 3/6.

6 V. 125 A.H. STORAGE BATTERY in wooden carrying case with hinged lid and handles. New and unused. Size 15½×11×7½in. **69/6.** Carr. 10/–.



6V. 40 A.H STORAGE BATTERY in wooden carrying case with hinged lid and strap. New and unused. Size 10½ × 9½ × 5in. **25/–.** Carr. 5/–.



ACCUMULATORS. Bakelite cased 2 v. 100 ampere 75 actual. Ex-Govt. New and unused. Complete with carrying handle. Size 6½in. × 6½ in. × 3½in. **15/–** each. Carr. 3/6. 3 sent for **50/–** or 6 for **£5** carr. paid. Ditto, 14 A.H. less handle **5/6.** P. & P. 2/–.



6 V. 20 A.H. ACCUMULATORS comprising three 2 v. celluloid-cased cells in wooden case. Size 5 × 5 × 7½in. New and unused. **17/6.** P. & P. 3/6.

PARMEKO TWIN BAKELITE LOUD HAILERS (ex-Admiralty). Mounted on metal base. Complete with 600 ohm line transformer. 15 ohm voice-coil. Ideal for P.A. and all outside work. Length 15in., height 9in., dia. of horns 8½in. Price **45/–.** Carr. **7/6.**

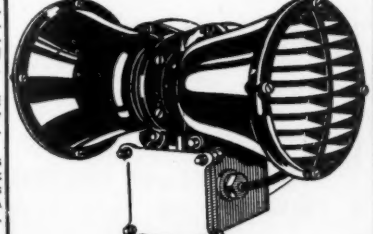

THE NEW "TRANSISTOR—8"

COMBINED CAR-RADIO/PORTABLE

PUSH-PULL SUPERHET

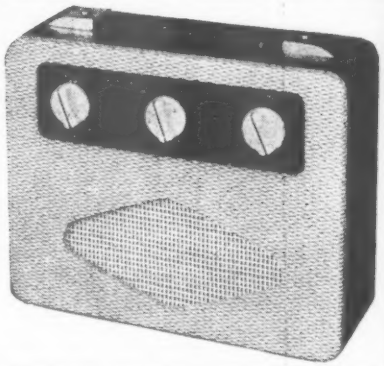

This Portable 8 Transistor Superhet is tunable for both Medium and Long Waves and is comparable in performance to any equivalent Commercial Transistor Set. Simplified construction enables this set to be built easily and quickly into an attractive lightweight cabinet supplied.

TEN STAR FEATURES

- ★ 8 Specially selected Transistors
- ★ 250 Milliwatts Output Push Pull
- ★ Medium and Long Waves
- ★ Internal Ferrite Rod Aerial
- ★ 7×4 Elliptical Speaker
- ★ Drilled Plastic Chassis of 8½×2½in.
- ★ Point to Point wiring and practical layout
- ★ Economical. Powered by 7½ v. battery
- ★ Highly sensitive
- ★ Ideal car radio

Car Radio Conversion Components, 8/- extra.

We can supply all these items including Cabinet for £11/10/-. All parts sold separately. Send for circuit diagrams, assembly data, illustrations and instructions, and full shopping list.



Size 5⅛in. × 3⅛in. × 1⅛in.

MINI—7 POCKET TRANSISTOR PORTABLE

ULTRA SENSITIVE! ECONOMICAL!

HIGHLY SELECTIVE! WELL RECOMMENDED!

MAY BE BUILT FOR ONLY **£9/19/6**

SPECIAL FEATURES

- ★ 7-selected Transistors
- ★ Push-Pull Output
- ★ Ferrite Rod Aerial
- ★ Drilled Chassis
- ★ Practical Layout
- ★ Medium Waves
- ★ Long Wave 10/6 extra
- ★ Attractive Plastic Case

This superhet is superior in performance to most commercial transistor sets and costs less than half the price.

All components as specified can be supplied at an inclusive price of ..... **£9/19/6** P. & P 2/6.

Long-Wave Components 10/6 extra.

Send 1/6 for instruction booklet and prices.

HENRY'S RADIO LTD., 5, HARROW RD., EDGWARE RD., W.2 PAD. 1008/9

CREDIT SCHEME NOW WORKING

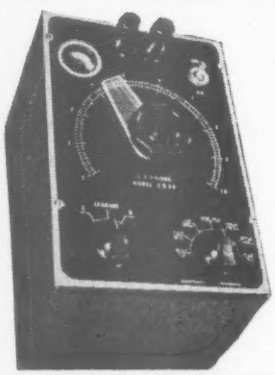

CR50 BRIDGE measures 10pFd to 100mFd and 1 ohm to 10 Megohms in fourteen ranges. Leakage test for condensers. Mains operated. Complete with instructions. £8/2/6 plus 4/6 carr./packing or £1 deposit and 32 weekly payments of 5/-.

SG50 SIGNAL GENERATOR covers 100kc/s to 80Mc/s in six ranges on fundamentals. A de luxe instrument for only £9 plus 6/- carr./packing or £2 deposit and 32 weekly payments of 5/-.

VV60 AUDIO VOLTMETER measures 1 milli-volt to 100 volts in five ranges. Price £10 plus 4/6 carr./packing.

Further details of the above sent by return of post on receipt of self addressed envelope.

TRADE supplied direct. CALLERS always welcome.

GRAYSHAW INSTRUMENTS

126 Sandgate High Street, Folkestone, Kent

Phone: Folkestone 78618

SPUTNIK

The very word Sputnik conjures up ideas of great scientific developments in the near future . . . magnetic recording will play its part in these developments and we shall aim to supply recording heads for every application that arises.

IMPORTANT ANNOUNCEMENT

Quantity production on our new range of miniature heads is now in full swing.

TYPE DR.



Type DR head—illustrated actual size, is ⅞in. square and ¼in. length. Curved 1¼in. radius in front. Standard Record/Play head in medium (120 mH) or High (450 mH) impedance. Two fixing holes underneath ⅞in. apart, tapped 8 BA. Also available is a simple fixing bracket which allows for azimuth adjustment.

This novel design of miniature head possesses many advantages over larger types—higher output—lower losses—with extremely low hum and noise pickup.

ENQUIRIES INVITED FOR QUANTITY QUOTATIONS

P. A. MARRIOTT & CO.

SUNLEIGH WORKS, SUNLEIGH ROAD, ALPERTON, MIDDLESEX.

Phone: Wembley 7493.

"EAVESDROPPER" THREE TRANSISTOR POCKET RADIO

(No Earth or Aerial required in areas of good signal strength.) Variable tuning on medium waves. Total cost as specified, including Transistors, Transformers, Coils, Condensers and Battery, etc., with circuit and plastic case. All items sold separately. Full practical layout diagrams, 70/-, post free. With balanced armature earpiece 73/6. With Min. Hearing Aid 86/-.

MINI-TWO TWO TRANSISTOR MINIATURE POCKET RADIO

The smallest Transistor set offered on the market. Variable tuning. Drilled chassis, plastic case 3 × 2 × 1in., Miniature Hearing Aid, 2 Transistors and all components including 3 volt battery, circuits and full practical layout diagrams. All components sold separately. **Total cost 47/6 complete.**

TRANSISTORS

(JUNCTION TYPE P-N-P)

RED-SPOT 800 Kc/s Audio Frequency **7/6**
WHITE-SPOT 2.5 Mc/s R.F. I.F. Amp. **15/-**
RED/YEL. 1.5 to 8 Mc/s. R.F. and I.F.... **21/-**

TRANSISTOR SIGNAL TRACERS. Complete Kit with 2 Transistors, Components, Phones and Circuit and plastic case..... **37/6**
TRANSISTOR SQUARE WAVE GENERATOR. Complete Kit with 2 Transistors, Components, Circuit and plastic case... **20/-**

"HOMELIGHT" TWO TRANSISTOR PERSONAL PORTABLE

Variable tuning. We can supply all components, including two Transistors, Diode, Resistors, Condensers, Miniature Hearing Aid, Plastic case. Practical layout, drilled chassis and battery for 50/- All items sold sold separately

HOMELIGHT III

As above but with extra stage increasing output. Complete with 3 transistors, etc.

58/6

TRANSISTOR PUSH-PULL AUDIO AMPLIFIER

(200 Milliwatts Output)

Build this Push-Pull Amplifier which is ideal for Cystal or Magnetic Pick-up Amplification. Baby Alarm, Microphone, Amplifier, etc. Powered by 6-volt dry battery lasting for months.

Complete kit of parts including four Transistors and all Components with Circuit and Plastic Case (less Speaker)

69/6 P.P. 2/6

QUARTZ CRYSTALS

FT243 and FT241 **5/- EACH**
100 kc/s-27 Mc/s. Also available. Send for lists of frequencies.

Sputnik Special

SHORT-WAVE COMMUNICATION RECEIVER

10-60 Mc/s (5-30 Metres)

RECEPTION SET TYPE 208



Containing 6 valves, 2-6K8G, 2-EF39, 7Q6G and 6V6G, Metal rectifiers, built-in mains pack and 6 v. Vibrator pack, built-in 6½in. speaker. Muirhead slow motion drive, B.F.O. and R.F. stage. 2 Mc/s I.F. freq. Provision for 'phones and muting and 600 ohm line.

Input 100/250v. A.C. 6v. Vibrapak supplied for battery operation.

£6/19/6

Carr. 15/6.

In new condition and air tested.

BE PREPARED TO LISTEN TO THE SATELLITES

TRIPLETT A.C./D.C. POCKET TEST-METER TYPE 666H



15 ranges
1,000 ohms per volt

In new condition with Prods and Internal battery

A.C./D C. 10/50/250/1,000/5,000 volts.
Milliamps 0-10/100/500.
Ohms 0-300/250,000.

£5/10/-

CATHODE RAY TUBES

VCR138A with screen	£1	15	0
VCR139A	£1	15	0
VCR97. Full T.V. picture (carr. 2/-)	£2	0	0
VCR517C. Full T.V. picture	£1	15	0
MU-METAL SCREENS for VCR97 or 517		10	0
3BP1. Brand new	£1	10	0

AC/DC 220/250v. PORTABLE-GRAM AMPLIFIER

Completely assembled on Baffle Board size 12½ x 4½in. Depth 3in. Containing two Mullard Valves types UL84 and UY85, Elac 7 x 4 Elliptical Speaker. Volume Control, Tone Control. Nothing else to buy, just plug in to Mains and connect your Pick-up to Amplifier.

Absolute Bargain **67/6** Carr. 2/6

500 v. EVERSHED WEE-MEGGER8

New condition, with leather case £8 19 6
Brand new, with leather case..... £12 10 0
100 v., new condition, with leather case £6 0 0

U.S.A. R.F. WATTMETER TS/87/AF

Three position 0-10/15/30 watts. Complete with photo-cell, 2 spare lamps and leads, with transit case.
BRAND NEW **£10/10/-**



BC 906D FREQUENCY METER

Range 150-235 Mc/s. New condition.

45/-

"373" MINIATURE IF STRIP 9.72 Mc/s

The ideal F.M. conversion unit as described in "P.W." April/May, 1957. Complete with 6 valves, three EF91's, two EV92's and one EB91. I.F.T.'s etc., in absolutely new condition. With circuit and conversion data. **42/6**

12/6 (less valves) (with valves)
Postage and packing 2/6 (either type).

WAVE-GUIDE WATTMETER

Type W8921 10 cm. Complete in transit case.
BRAND NEW **£5/10/-**

TEST SET 229

Admiralty type 600 Mc/s Complete in transit case.
BRAND NEW **£5/10/-**

RT10/APS-3

3 Centimetre Radar Unit

Containing 725A Magnetron, 2—723A/B's, 2—6AC7's, 724A, IN23, magnet and pulse trans.
BRAND NEW IN CARTON **£10/10/-**

PIRANI HIGH-VACUUM TEST EQUIPMENT

with calibrator and galvo.

£33/10/-

SEND FOR BOOKLET

U.S.A. TESTMETER TYPE "834-S"

AC/DC 15—RANGES F.S.D. 1,000 O.P.V.
AC/DC Volts 12/60/300/600v./1,200/6,000v.
Milliamps 1.2/12/60/600 mA.
ohms 0-5,000/5 meg. **£6/19/6**
Complete in wooden carrying case with leads and internal batteries.

WALKIE/TALKIE TYPE 38 TRANSMITTER/RECEIVER

Complete with 5 valves In new condition. With circuit. These sets are sold without guarantee, but are serviceable. P.P. 2/6. **22/6**

H/phones 7/6 pair. Junction box 2/6. Throat mike 4/6. Canvas bag 4/-. Aerial Rod 2/6.

Send 3d.—28 PAGE CATALOGUE CONTAINING BARGAINS IN VALVES, COMPONENTS AND METERS

HENRY'S RADIO LTD.

5, HARROW ROAD, PADDINGTON W.2
(Opposite Edgware Road Station) PAD. 1008/9

XUM

AERIALS

STANDARD TELEPHONE HAND SET

With sound powered earpiece and Carbon mike. Press to talk. BRAND NEW with cord and plug. Can be used as sound powered telephone system by connecting 1.5v cell in series. ONLY 12/6 each. P. & P. 2/6.

AMERICAN MINIATURE MICRO SWITCHES. On/off or off/on, mains 1 amp. Size 1 1/16" x 1/2" x 1/2". Ideal for furniture manufacturers. Fraction of original cost. 2/6 each or 25/- per dozen.

MICROPHONES

All types available. All Brand New.

No. 8 (*as illustrated*). Blue, Carbon Insert. Complete with cord and plug. ONLY 5/-. P. & P. 1/6.

No. 3A. Refillable Carbon Insert. Finished in Red and Black Bakelite with white rubber mouth piece. Cord, plug and canvas neckband. 6/6. P. & P. 1/6.

3-PIECE 12FT. SETS FOR ONLY 7/6 Incorporating copper plated bottom, middle and solid top aerial sections.

1 FOOT SECTIONS Can be extended as required. Only 6d. each or 5/- per dozen.

F. ROD AERIALS. Bottom sections 4 feet Copper Plated. Can be used to form Beam Antenna or complete Aerial Masts. 2/3 each P. & P. 1/6. 6 for 12/- P. & P. 3/-.

PORTABLE BATTERY OPERATED FIELD OR FACTORY SWITCHBOARD

Simple to operate ten line telephone switchboard Ideal for mobile operations, Field Days, Sports events, etc. etc. This universal switchboard can keep ten extensions in constant touch by turn of a handle. Only requires batteries for immediate use. Send us your requirements for quotation.

HEADPHONES

TYPE D.L.R.S. Single earpiece with cord, plug and canvas headband. ONLY 4/-. P. & P. 1/6.

LOW IMPEDANCE PADDED HEADPHONES with metal headband (as illustrated above). 7/- per pair. P. & P. 2/-.

HIGH RESISTANCE EARPIECES. 1,000Ω Brand new. 3/6 each.

C.L.R.3 LOW RESISTANCE. Complete with cord and plug. Brand new. Only 5/-each.

Please send us your enquiries for all types of Microphones and Headphones, we can offer the keenest prices in the country.
EXPORT ENQUIRIES A SPECIALITY

WIRELESS SET No. 19 MK. II

(Made by ZENITH). Two transmitter-receivers and an intercom amplifier in one case. "A" set covers 2—8 mc/s. RT and CW, and "B" set 240 mc/s, RT only. Complete with 15 valves and 500 Micro amp. check and Tuning Meter. Only 60/-, plus 10/- carr. Attachments for above: Variometers 18/6, Morse Key assembly 4/6, 12ft. Aerial 7/6, 12 volt Power Unit 30/-.

COMPLETE No. 1 HEADGEAR

BRAND NEW

consists of low impedance padded headphones and No. 7 hand microphone with moving coil insert. For use with Army No. 19 set and all other Army Transreceivers

Price 10/-.

P. & P. 3/6.

AMERICAN No. 7 MOVING COIL MICROPHONES. Tested. ONLY 6/6 each.

B. ADLER & SONS (Radio) Ltd.

KING'S HEAD YARD, COPTIC ST., LONDON, W.C.1 Tel.: MUSeum 9606

Still THE MOST RELIABLE
MAGNETIC RELAY

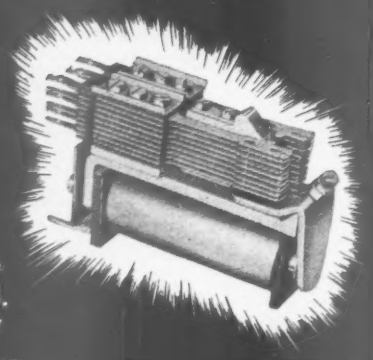

A.I.D.
A.R.B.
ADMIRALTY
APPROVED

The 3000 TYPE RELAY can now be supplied to
PLUG IN
COMPLETE WITH BASE

A.B.S. RELAYS LTD. Dept. W.W.
12 STORE STREET, LONDON, W.C.1. Tel. MUSeum 2455

'EMI STRUCTOR' HI-FI

✻ ASSEMBLE THE UNITS

✻ LEARN AS YOU BUILD

At last! Here's YOUR opportunity to own a magnificent Hi-Fi — a complete hi-fi system in a beautifully-styled cabinet at *two-thirds* of normal price—plus all the *extra* satisfaction and fun of building it yourself! The units are easy to assemble—*no* experience needed — and the instruction manuals guide you at each stage and teach you all about Hi-Fi!

CHOICE OF UNITS AVAILABLE:

Superb contemporary style cabinet · 8 or 14 watt high quality amplifier (push-pull output with feed back) · 4-speed auto-change record player with compensation · High quality speaker system · Tape transcriptor with pre-amplifier · Record storage compartment · Instruction Manuals on assembly and on Hi-Fi sound reproductions. All equipment available on deferred terms.

EMI INSTITUTES
The Educational Organisation associated with
"HIS MASTER'S VOICE"
CAPITOL
COLUMBIA
Etc.

POST TODAY
To: E.M.I. Institutes, Dept. H.F. 127, London W.4.
Please send, without any obligation, your free brochure to :—
NAME_____
ADDRESS_____
JUNE/58 (C122)

200/250 v. A.C. MOTORS. New. 1/80 h.p., 2 drives, direct 6,000 r.p.m., reduction 300 r.p.m. **22/6** each. P. & P. 2/6.

NEPTUNE SERIES DOUBLE POTTED CHOKES by Parmeko, C. Core twice four Henry at 70 mA. Brand new and boxed, **10/6** each. P. & P. 1/6.

NEPTUNE SERIES POTTED TRANSFORMER. C. Core by Parmeko. Tapped primary from 110 v. to 250 v., secondary 500-450-0-450-500 v. 110 mA. Brand new and boxed. **32/6** each. P. & P. 3/-.

HIGH SPEED RELAY. Siemens, two bobbins, 1,000 ohms each. New, **10/6** each. P. & P. 1/-.

NEON LIGHT, 230 v. A.C. M.B.C. Clear, **1/9** each. P. & P. 6d.

CONTROL PANEL containing 50 ohms 50 watt rheostat and toggle switch, in crackle finished metal case. New. Ideal for model control. **8/6** each. P. & P. 2/6.

DYNAMOTOR, (Rotary Convertor) 6 volt in, 250 volt out at 100 mA. ex new equipment, **25/-** each. P. & P. 3/-.

METERS. Brand new, guaranteed perfect.

5 amp. D.C. M.I. 2½in. Fl. Rnd.	11/6
7½ amp. D.C. M.I. 3½in. Rnd. Pr....	12/6
1 mA. M.C. 2½in. Fl. Rnd.....	22/6
25 v. D.C. M.C. 2in. Fl. Rnd.....	7/6
300 v. A.C. M.I. 2½in. Fl. Rnd.....	22/6
Dual range pocket volt meter 0-25 and 0-250 v., in wallet.....	12/6
Ex. equip. 500 microamp. 2in. M/c. scaled. 0-15 and 0-600 v.....	14/6
Ex equip. 50 mA. M.C. 2in. sq....	7/6

P. & P. on all meters 1/- each.

HEADPHONES

4,000 ohms, imported, new.....	15/-
2,000 ohms, "Ivalek," Brit. New	12/6
L.R. M/c. S. G. Brown.....	12/6
H.S. 30 L.R. U.S.A., min. ear pcs....	15/-

P. & P. on above 1/6 each.

MICROPHONES—NEW

Throat, British, magnetic.....	4/6
Throat, carbon, U.S.A.....	4/6
No. 8 carbon with switch.....	7/6
Type 48, ex oxy. mask.....	3/6

P. & P. on above 1/- each.



Morse Practice Set, polished wooden base, tapper, adjustable buzzer, battery clips and terminals. Brand new, original manufacturers' packing. 8/6 each. P.&P. 2/-.

Morse Keys. 8-ampere Service patt. New. 2/6 each. P. & P. 1/-.



VEEDER REVOLUTION COUNTER. 6 columns, fitted reduction drive, built inside small unit. New. 8/6 each. P. & P. 2/-.

EVERSHED AND VIGNOLES NEW TEST EQUIPMENT offered at fraction of makers' price. **"WEE MEGGER,"** complete in leather case, brand new and perfect. 100 volt, **£6** each. P. & P. 2/6. 250 volt, **£10/10/-** each. P. & P. 2/6.

EVERSHED AND VIGNOLES CIRCUIT TESTING OHMS METER. Pattern "S," complete with test prods, inst. book, etc. Two ranges 0-3 and 0-30 ohms. Brand new, guaranteed perfect, as illustrated. **£4/17/6.** P. & P. 2/6.

EVERSHED AND VIGNOLES Series II metal cased meggers, 500 volt. Used, but in perfect working order, complete with leather carrying case. **£20** each. P. & P. 5/-.

SPECIAL OFFER 3½in. round flush fitting 250 v. A.C. rectifier m/c meter with linear scale from 0-250 v., **35/-** each. P. & P. 1/-.

AIRCRAFT CINE CAMERA G45B Mk. III, fully modified, fitted with f/3.5 triple anastigmatic lens, takes 25ft. of 16 mm. film, fitted with 24 v. motor. 16 exposures per sec. Mint condition, brand new, in maker's original packing. **£6/10/-** each. P. & P. paid.



MUIRHEAD PRECISION KEY SWITCHES. Low capacitance, six double sets of contacts each side. Brand new. Chrome-plated bezel. Price **12/6** each. P. & P. 1/-.



MUIRHEAD PRECISION STUD SWITCHES, brand new and boxed, two banks each bank 24 position heavy duty contacts. Price **12/6** each. P. & P. 1/-.

MUIRHEAD VERNIER DRIVE. Scaled 0-180 degrees, ratio 31/1, dia. 3in., as fitted to R.F.26 units. Complete with lampholder. In manufacturers original packing. New, **8/6** each. P. & P. 1/6.

AUTO TRANSFORMERS, step up, step down, 110-200-220-240 v. Fully shrouded. New. 300 watt type **£2/2/-** each. P. & P. 4/6. 500 watt type **£3/3/-** each. P. & P. 4/6. 1,000 watt type **£4/4/-** each. P. & P. 4/6. Also 60 mA. **19/6** each. Plus P. & P. 2/.

Photo Multiplier. Type 931A, for Alfa counting, film scanning, spectography, etc., new. **£2/5/-** each. P. & P. 1/-.

WHEATSTONE BRIDGE UNIT. 4-stud switches 0-10, 0-100 ohms, galvanometer centre zero, F.S.D. 2.5 mA. In oak carrying case 16 x 7½ x 6in. **40/-** each. P. & P. 3/6.

TRIPODS. Solid wooden legs 38in. long, metal top and metal toes. As new. Price **10/6** each., plus 3/- carriage.

DOUBLE-ENDED P.O. TELEPHONE LEADS, about 36in. long each with two type 301 Jack Plugs. New **3/6.** P. & P. 6d.

TELEPHOHE HANDSETS, sound power, pair will work by simple connection without batteries. Good condition, **22/6** each. P. & P. 1/9.

A.R.B. U.S.A. RECEIVERS, 24 volt, covering 195-9,050 k/c. in 4 bands. As new, suitable for use on boats, etc. Price **£7/10/-** including carriage.

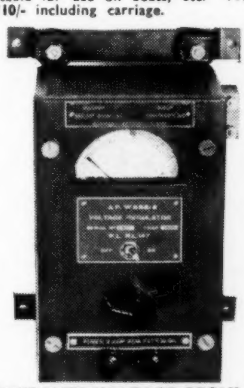

ADMIRALTY VOLTAGE REGULATORS. Input 200/250 v. A.C., output set to 200 v. A.C. Complete with meter in metal case. Current approx. 1½ amp. Price **37/6.** P. & P. 3/-.



U.S.A. 27-volt 4-Pole CHANGE-OVER RELAYS. Brand new and boxed. 5/6 each. P. & P. 6d.

ASK FOR EXPORT QUOTATIONS **WE ARE EXPERTS AT OVERSEAS PACKING & SHIPPING!**

SERVICE TRADING Co.

PERSONAL CALLERS ONLY: **9 Little Newport Street, London, W.C.2.** *Tel: GER 0576*

ALL MAIL ORDERS: *(Early Closing Thursday)*
47-49 High Street, Kingston-on-Thames.
Telephone: KINgston 4585

H

SELENIUM RECTIFIERS

L.T. Types

2/6 v. ½ a.h.w.	1/9
6/12 v. ½ a.h.w.	2/9

F.W. Bridge

6/12 v. 1 a. ..	4/11
6/12 v. 2 a. ..	9/9
6/12 v. 3 a. ..	11/9
6/12 v. 4 a. ..	14/9
6/12 v. 6 a. ..	19/9
6/12 v. 10 a.	25/9

H.T. Type H.W.

120 v. 40 mA.	3/9
250 v. 50 mA.	5/9
250 v. 80 mA.	7/9
350 v. 60 mA.	7/9
250 v. 250 mA.	10/9

BATTERY CHARGING EQUIPMENT

ASSEMBLED CHARGERS

6 v. 1 a.	19/9
6/12 v. 1 a.	27/9
6 v. 2 a.	29/9
6/12 v. 2 a.	38/9
6/12 v. 4 a.	56/9

Above ready for use with mains and output leads. Cases well ventilated and finished in stoved blue hammer. Carr. and packing. 3/6.

BATTERY CHARGER KITS

Consisting of Mains Transformer F.W. Bridge. Metal Rectifier, well ventilated steel case. Fuses, Fuse-holders, Grommets, panels and circuit. Carr. 2/6 extra.

6 v. or 12 v. 1 amp. ..	22/9
6 v. 2 amps	25/9
6 v. or 12 v. 2 amps. ..	31/6
6 v. or 12 v. 4 amps. ..	53/9

BATTERY CHARGER KIT

Consisting of F.W. Bridge Rectifier 6/12 v. 5 a. Mains Trans. 0-9-15 v. 6 a. output, and ammeter. Only 49/9. Post 3/-.

ASSEMBLED CHARGER 6 v. or 12 v. 2 amps.

Fitted Ammeter and selector plug for 6 v. or 12 v. Louvred metal case, finished attractive hammer blue. Ready for use with mains and output leads. Double Fused. Only **49/9** Carr. 3/6.

All for A.C. Mains 200-250v., 50 c/s. Guaranteed 12 months

Assembled 6v. or 12v. 4 amps.



Fitted Ammeter and variable charge selector. Also selector plug for 6 v. or 12 v. charging. Double fused. Well ventilated steel case with blue hammer finish. Ready for use with mains and output leads. Carr. 3/9. Or Deposit 30/- and four monthly payments 13/-. **75/-**



AM/FM RADIOGRAM CHASSIS, HIGH QUALITY. PUSH PULL. 6-8 WATTS OUTPUT

Current manufacture. 12 months' guarantee. For 200-250 v mains. Covers L and M. Wavebands plus F.M. Includes 8 latest type miniature B.V.A. valves. Only 22 **gns.** plus 7/6 carr. Or deposit £2/12/- and 9 monthly payments of £2/12/-. Guaranteed 12 months.

CO-AXIAL CABLE. 75 ohms, ¼in., 8d. yard. Twin screened feeder 11d. yard.

ELECTROLYTICS (current production) Not Ex-Govt.

Tubular Types		Can Types	
8 mfd. 450 v.	1/9	16μF 450 v.	2/9
8 mfd. 500 v.	2/6	16 mfd. 500 v.	3/9
16μF 350 v.	1/11	32μF 350 v.	2/11
16μF 450 v.	2/9	32 mfd. 450 v.	4/9
16μF 500 v.	3/9	100 mfd. 450 v.	4/9
8-16μF 500 v.	4/11	8-8μF 450 v.	2/11
25μF 25 v.	1/3	8-16μF 450 v.	3/11
50μF 12 v.	1/3	16-16μF 450 v.	3/11
50 mfd. 25 v.	1/9	32-32μF 350 v.	4/9
50μF 50 v.	1/9	32-32μF 450 v.	5/9
100 mfd. 12 v.	1/9	100-100 mfd. 350 v.	5/9
100 mfd. 25 v.	2/3	150 mfd. 450 v.	5/9
3,000 mfd. 6 v.	3/9	100-200 mfd. 275 v.	6/11
6,000 mfd. 6 v.	3/11		

VOLUME CONTROLS with long spindles, all values, less switch, 2/9; with S.P. switch, 3/9.

EX GOVT. STEP UP/STEP DOWN TRANSFORMERS. Double wound 80/100 watts. 10-0-100-200-220-240 v. to 5-0-75-115-125-135 v. or Reverse. Only 12/9 plus 2/9 post 10-0-100-200-220-240 v. to 9-0-110-122-136-148 v. or Reverse. 300 watts, 35/9, plus 7/6 carr.

EX GOVT. METAL BLOCK PAPER CONDENSERS

4 mfd. 1,000 v... 3/9 8 mfd. 500 v.. 4/6
10 mfd. 500 v. 3/9

THE SKY FOUR T.R.F. RECEIVER



A design of a 3 valve 200-250 v. A.C. Mains L. & M. wave T.R.F. receiver with selenium rectifier. For inclusion in cabinet illustrated or walnut veneered type. It employs valves 6K7, SP61, 6F6G, and is specially designed for simplicity in wiring. Sensitivity and quality is well up to standard. Point-to-point wiring diagrams, instructions and parts list, 1/9. This receiver can be built for a maximum of £4/19/6 including cabinet. Available in brown or cream bakelite, or veneered walnut.

EX GOVT. VIBRATOR UNITS. 12 v. input 280 v. output. Suitable for car radio, etc., 16/6.

VIBRATORS. Oak and Wearite. Synchronous 7 pin 2 v. 7/9, 6 v. 8/9.

6v. LUCAS MOTOR CYCLE ACC. 22A.H. Brand new sealed (in pairs) 39/6d.ea. post 3/6d.

EX. GOVT. 50 WATT AMPLIFIERS. Brand new. For 200-250 v. 50 c.p.s A.C. mains. Designed for speech only but with suitable pre-amp, could be used with Gram. or Radio. Valves included. Four 6L6s used for output. Complete with hand microphone with good length of lead. Unused in original transit cases. Only 9 **gns.** Ready for use. Carr. 15/-.

RE-ENTRANT SPEAKERS. Tannoy 8 watt, 7.5 ohms suitable for above, 25/- each.

EX GOVT. MAINS TRANSFORMERS

All 200-250 v. 50 c/s. input.

250-0-250 v. 60 mA. 6.3 v. 3 a., 6.3 v. 1 a. Potted 4½-3½-3in.	11/9
Pr. 0-110-200-230-250 v., 275-0-275 v. 100 mA., 6.3 v. 7 a., 5 v. 3 a.	21/9
230-0-230 v. 80 mA., 12.6 v. 1.5 a. 5 v. 2 a.	11/9
250-0-250 v. 150 mA. 5 v. 3 a.	16/9
350-0-350 v. 160 mA. 6.3 v 5 a. 5 v. 3 a.	27/9
400-0-400 v. 250 mA. 5 v. 2 a., 5 v. 2 a.	18/9
450-0-450 v. 150 mA. 6.3 v. 5 a., 6.3 v. 1 a., 5 v. 3 a.	29/9
450-0-450 v. 250 mA. 6.3 v. 3 a., 6.3 v. 1 a., 5 v. 6 a.	49/9
12.5 v. 3 a., 5 v. 3 a.	12/9

R.S.C. BATTERY TO MAINS CONVERSION UNITS

Type BM1. An all dry battery eliminator. Size 5½ × 4½ × 2in. approx. Completely replaces batteries supplying 1.4 v. and 90 v. where A.C. mains 200-250 v. 50 c/s. is available. **Suitable for all battery portable receivers requiring 1.4 v. and 90 v.** This includes latest low consumption types. Complete kit with diagram. 39/9 or ready for use 46/9.

Type BM2 Size 8 × 5½ × 2½in. Supplies 120 v., 90 v., and 60 v., 40 mA. and 2 v. 0.4 a. to 1 amp. fully smoothed **THEREBY COMPLETELY REPLACING BOTH H.T. BATTERIES AND L.T. 2v. ACCUMULATORS** when connected to A.C. mains supply 200-250 v. 50 c/s. SUITABLE FOR ALL BATTERY RECEIVERS normally using 2 v. accumulator. Complete kit with diagrams and instructions, 49/9, or ready for use, 59/6

JUNCTION TRANSISTORS For R.F. 27/6. A.F. 7/9.

MINIATURE MOTORS. 24/28 v. D.C. A.C. Size only 2½ × 1½in. Spindle 1½in. long, ¼in. diam. Made by Hoover Ltd., Canada. Price only 9/9.

M.E. SPEAKERS. 2-3 ohms R.A. 8in. Field 600 ohms., 11/9.

MANUFACTURERS' SURPLUS TRANSFORMERS. Primary 230-250 v. Drop through type 325-0-325 v 100 mA., 6.3 v. 2.5 a., 5 v. 2 a. 17/9. Post 2/9.

EX GOVT. SMOOTHING CHOKES

250 mA., 20 H., 150 ohms	19/6
250 mA., 5 H., 50 ohms	12/9
150 mA., 10 H., 50 ohms	10/11
120 mA., 12 H., 100 ohms	9/9
100 mA., 10 H., 100 ohms	6/9
100 mA., 5 H., 100 ohms, tropicalised..	3/11
50 mA., 50 H., 1,000 ohms	6/9

EX GOVT. CASES. Well ventilated, black crackle finished, undrilled cover. Size 14 × 10 × 8¼in. high. IDEAL FOR BATTERY CHARGER OR INSTRUMENT CASE, COVER COULD BE USED FOR AMPLIFIER. Only 9/9, plus 2/9 post. Size 13¼in. × 8in. × 6¼in. with undrilled perforated cover finished in stoved grey enamel, 7/9, plus 2/9 post.

SPECIAL OFFERS. Small 2 gangs .005 mfd., 4/9. Electrolytics 32-32-32 mfd. 250 v., 2/9 each or in lots of six, 2/3 each.

R.S.C. TRANSFORMERS

FULLY GUARANTEED. INTERLEAVED AND IMPREGNATED.

MAINS TRANSFORMERS

Primaries 200-230-250 v. 50 c/s.

FULLY SHROUDED UPRIGHT MOUNTING

250-0-250 v. 60 mA., 6.3 v. 2 a., 5 v. 2 a.	17/6
250-0-250 v. 100 mA., 6.3 v. 4 a., 5 v. 3 a.	23/9
250-0-250 v. 100 mA., 6.3 v. 6 a., 5 v. 3 a., for R1355 conversion	31/-
300-0-300 v. 100 mA., 6.3 v. 4 a., 5 v. 3 a.	25/9
350-0-350 v. 100 mA., 6.3 v. 4 a., 5 v. 3 a.	25/9
300-0-300 v. 130 mA., 6.3 v. 4 a., c.t., 6.3 v 1 a., suitable for Mullard 510 Amplifier	33/9
375-0-375 v. 150 mA., 6.3 v. 4 a., 5 v. 2 a.	29/9
350-0-350 v. 150 mA., 6.3 v. 4 a., 5 v. 3 a.	33/9
350-0-350 v. 150 mA., 6.3 v. 2 a., 6.3 v. 2 a., 5 v. 3 a.	33/9
425-0-425 v. 200 mA., 6.3 v. 4 a., c.t., 6.3 v. 4 a., c.t., 5 v. 3 a., suitable Williamson Amplifier, etc.	49/9

TOP SHROUDED DROP-THROUGH TYPE

260-0-260 v. 70 mA., 6.3 v. 2 a., 5 v., 2 a.	16/9
350-0-350 v. 80 mA., 6.3 v. 2 a., 5 v. 2 a	18/9
250-0-250 v. 100 mA., 6.3 v. 4 a., 5 v. 3 a.	22/9
300-0-300 v. 100 mA., 6.3 v. 4 a., 5 v. 3 a.	23/9
350-0-350 v. 100 mA. 6.3 v. 4 a., 5 v. 3 a.	23/9
350-0-350 v. 150 mA., 6.3 v. 4 a., 5 v. 3 a.	29/9

ELIMINATOR TRANSFORMERS

Primaries 200-250 v. 50 c/s.

120 v. 40 mA., 5-0-5 v. 1 a.	14/9
90 v. 15 mA., 6-0-6 v. 250 mA.	9/11

FILAMENT TRANSFORMERS

Primaries 200-250 v. 50 c/s.

6.3 v. 1.5 a.	5/9	6.3 v. 3 a.	8/11
6.3 v. 2 a.	7/6	6.3 v. 6 a.	17/6
0-4-6.3 v. 2 a. ..	7/9	12 v. 3 a. or	
12 v. 1 a.	7/9	25 v. 1.5 a. ..	17/6

CHARGER TRANSFORMERS

All with 200-230-250 v. 50 c/s. Primaries: 0-9-15 v. 1½ a., 11/9; 0-9-15 v. 3 a., 16/9; 0-9-15 v. 5 a., 19/9; 0-9-15 v. 6 a., 23/9.

OUTPUT TRANSFORMERS

Midget Battery Pentode 66:1 for 3S4, etc.	3/6
Small Pentode 5,000 Ω to 3 Ω	3/9
Standard Pentode, 5,000 Ω to 3 Ω	4/6
Standard Pentode, 8,000 Ω to 3 Ω	4/9
Push-pull 8 watts 6V6 to 5 ohms	8/9
Push-pull 10-12 watts 6V6 to 3 Ω or 15 Ω	15/9
Push-pull 10-12 watts to match 6V6 to 3-5-8 or 15 Ω	16/9
Push-pull EL84 to 3 or 15 ohms	16/9
Push-pull 15-18 watts, sectionally wound. 6L6, KT66, etc., to 3 or 15 ohms	21/9
Push-pull 20 watt high-quality sectionally wound, 6L6, KT66, etc. to 3 or 15 Ω	47/9

SMOOTHING CHOKES

250 mA., 5 H., 100 ohms	11/9
150 mA., 7-10 H., 250 ohms	11/9
100 mA., 10 H., 200 ohms	8/9
80 mA., 10 H., 350 ohms	5/6
60 mA., 10 H., 400 ohms	4/11
1 amp. 0.5 ohm. L.T. type	6/6

R.S.C. A10 ULTRA LINEAR 30 WATT AMPLIFIER

HIGH FIDELITY PUSH-PULL UNIT EMPLOYING SIX VALVES. EF86, EF86, ECC83 807, 807, GZ34. Tone Control Pre-amp stages are incorporated. Sensitivity is extremely high. Only 12 millivolts minimum input is required for full output. **THIS ENSURES THE SUITABILITY OF ANY TYPE OR MAKE OF MICROPHONE OR PICK-UP.** Separate Bass and Treble controls give both "lift" and "cut" with ample tone correction for long playing records. An extra input with associated vol. control is provided so that two separate inputs such as "mike" and gram., etc., etc., can be simultaneously applied for mixing purposes. **AN OUTPUT SOCKET WITH PLUG IS INCLUDED FOR SUPPLY OF 300 v. 20 mA. and 6.3 v. 1.5 a. FOR A RADIO FEEDER UNIT.** Price in kit form with easy-to-follow wiring diagrams.
Cover as illustrated 18/9 extra. Only **£10/19/6** carr. 10/-.

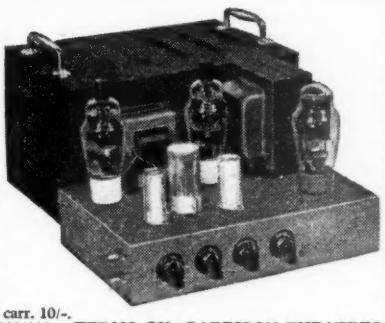

Type 807 output valves are used with High Quality Sectionally wound output transformer specially designed for Ultra Linear operation. Negative feedback of 20 D.B. in main loop. **CERTIFIED PERFORMANCE FIGURES ARE EQUAL TO MOST EXPENSIVE UNITS AVAILABLE.** Frequency response ± 3 D.B., 30-20,000 c/s., Tone Controls ± 12 D.B. at 50 c/cs., + 12 D.B. to − 6 D.B. at 12,000 c/cs., Hum and noise 70 D.B. down. Good quality reliable components used. Chassis finish blue hammer. Overall size 12×9×9in. approx. Power consumption 150 watts. For A.C. mains 200-230-250 v. 50 c/cs. Outputs for 3 and 15 ohm speakers. **EQUALLY SUITABLE FOR THE CONNOISSEUR OR FOR LARGE HALLS, CLUBS, or OUTSIDE FUNCTIONS. IDEAL FOR USE WITH MUSICAL INSTRUMENTS SUCH AS STRING BASS, ELECTRONIC ORGAN, GUITAR, etc. FOR DANCE BANDS, Speakers, etc., at keen cash prices or on terms with amplifiers.**

Or Factory built with 12 months' guarantee **£13/13/-. TERMS ON ASSEMBLED UNITS. DEPOSIT 36/-** and 9 monthly payments of 31/-. GARRISON THEATRES, etc., etc. **We can supply Microphones,**

EXPORT ENQUIRIES INVITED



LINEAR LT/45 HIGH QUALITY TAPE DECK AMPLIFIER COMPLETE with POWER PACK and OSC. STAGE. Suitable for Collaro Lane, Truvox, Aspden, Brennell, etc., etc. State make of Deck when ordering. Chassis size 12-7-3in Overall size 12-7-6½in For 200-250 v. 50 c/cs. A.C. mains. Output for standard 2-3 ohm speaker. Only 15 millivolts input required for full recording. Only 2 millivolts minimum output required from recording head. Magic Eye recording level indicator. Provision for feeding P.A. amplifier. Negative feed-back equalisation. Linear frequency response ± 3 D.B. 50-11,000 c/cs. Facilities for recordings at 15in., 7½in. or 3¾in. per second. Automatic equalisation at the turn of a knob. When switching from record to playback position automatic demagnetisation of heads is assured. Separate gain and output controls. Valves type ECC83, ECC83, EL84, EZ80, EM34. Output 4 watts. Unit supplied with maker's 12 months' guarantee. We know of no other make which represents the same exceptional value. Leaflet 6d.

12 Ready for use **GNS.** Carr. 7/6.

COLLARO JUNIOR 4 SPEED RECORD PLAYER with separate pick-up having dual point sapphire stylus. Brand new, cartoned. For 200-250 v. A.C. mains only. **£4/12/6.** Carr. 3/6.

PICK-UP ARMS. Acos GP54 turnover type with HGP59/32 cartridge cream finish. Only **29/9.**

LG3 MINIATURE 3 WATT GRAM. AMPLIFIER For 200-250 v. 50 c.p.s. A.C. Mains. Overall size only 6½×4½×2¾in. Fitted vol. and Tone Control with mains switch. Designed for use with any kind of single player or record changing unit. Output for 2-3 ohms speaker. Guaranteed 12 months. Only **55/9.**

R.S.C. A5 4-5 WATT HIGH GAIN AMPLIFIER



A highly sensitive 4-valve quality amplifier for the home, small club, etc. Only 50 millivolts input is required for full output so that it is suitable for use with the latest high-fidelity pick-up heads in addition to all other types of pick-ups and practically all mikes. Separate Bass and Treble controls are provided. These give full long playing record equalisation. Hum level is negligible being 71 D.B. down. 15 D.B of negative feedback is used. H.T. of 300 v. 26 mA. and L.T. of 6.3 v. 1.5 a. is available for the supply of a Radio Feeder Unit or Tape Deck pre-amplifier. For A.C. mains input of 200-230-250 v. 50 c/s. Output for 2-3 ohm speaker. Chassis is not alive, Kit is complete in every detail and includes fully punched chassis (with baseplate) with the blue hammer finish, and point-to-point wiring diagrams and instructions. Exceptional value at only **£4/15/-**, or assembled ready for use **25/-** extra, plus 3/6 carriage. Or Deposit **22/-** and five monthly payments of **22/-** for assembled unit.

R.S.C. A7 3-4 WATT QUALITY AMPLIFIER

A highly sensitive 4-valve amplifier using negative feedback and having an excellent frequency response. Pre-amplifier and Tone Control stages are incorporated with separate Bass and Treble controls giving full tone compensation for long playing records. Suitable for any kind of pick-up including latest high fidelity types. H.T. of 250 v. 20 mA and L.T. 6.3 v. 1 a., available for supply of Radio Feeder Unit, etc. ONLY 40 millivolts input required for full output. Fully isolated chassis with baseplate. For A.C. mains 200-250 v. 50 cycles. Output for 2-3 ohm speaker. Complete kit of parts point-to-point wiring diagrams and instructions. Only **£3/15/-**. carr. 3/6 or factory built **22/6** extra.

SENSATIONAL OFFER

STAAR GALAXY 4-SPEED MIXER AUTO-CHANGERS

A precision manufactured unit with unique finger tip control. Pick-up fitted with dual sapphire tipped stylus. A very compact changer in attractive duo-tone finish. For A.C. mains 110—250v. Brand new, cartoned. **£3/19/6.** *Post 3/9.*

COLLARO 4-SPEED AUTO-CHANGERS
With studio pick-up with turnover head, BRAND NEW. Cartoned, latest model. For 200-250 v. A.C. mains. Very limited number Conquest **£8/19/6.** Continental **9 Gns.** Carr. 5/6.

COLLARO RC54 3 SPEED AUTO-CHANGER
As above unit but for normal 3-speed requirements. Brand new cartoned but for 110 v. 50 c.p.s. A.C. mains. So that the unit can be operated from normal 200-250 v. A.C. mains we are supplying free with every changer a suitable auto-transformer with input and output voltages clearly marked. Limited number only. **£6/19/6.** Carr. 5/6.

LINEAR L45 MINIATURE 4/5 W. QUALITY AMPLIFIER. Suitable for use with Garrard B.S.R or any other record playing unit and most microphones. Total negative feedback 12 D.B. Separate Bass and Treble controls. For A.C. mains input of 200-250 v. 50 c.p.s. Output for 2/3 ohm speaker. Three miniature Mullard valves used. Size only 6×5×5½in. high. Chassis fully isolated from mains. Guaranteed 12 months. Only **£5/19/6.** Or Deposit **22/-** and five monthly payments of **22/-**. Send S.A.E. for leaflet.

PLESSEY DUAL CONCENTRIC 12in. P.M. SPEAKERS

(15 ohms), consisting of a high quality 12in. speaker of orthodox design supporting a small elliptical speaker ready wired with choke and condensers to act as tweeter. This high fidelity unit is highly recommended for use with our A11 or any similar amplifier. Rating is 10 watts. Gauss 12,000 lines. Price only **£5/17/6.** Or Deposit **13/-** and nine monthly payments of **13/-.**

A11 ULTRA LINEAR 12-14 WATT AMPLIFIER



NEW 1958 DESIGN HIGH-FIDELITY PUSH-PULL AMPLIFIER WITH "BUILT-IN" TONE CONTROL PRE-AMP. STAGES

Two input sockets with associated controls allow mixing of "mike" and gram. as in A10. High sensitivity. Includes 5 valves, ECC83, ECC83, EL84, EL84, 5Y3. High Quality sectionally wound output transformer specially designed for Ultra Linear operation, and reliable small condensers of current manufacture. INDIVIDUAL CONTROLS FOR BASS AND TREBLE "Lift" and "Cut" Frequency response ±3 DB 30-30,000 c/cs. Six negative feedback loops. Hum level 60 DB down ONLY 23 millivolts INPUT required for FULL OUTPUT. Suitable for use with all makes and types of pick-ups and microphones. Comparable with the very best designs. For **STANDARD or LONG PLAYING RECORDS.** For **MUSICAL INSTRUMENTS** such as **STRING BASS, GUITARS** etc., **OUTPUT SOCKET** with plug provides 300 v. 30 m.a. and 6.3 v. 1.5 a. For supply of a **RADIO FEEDER UNIT.** Size approx 12-9-7in. For A.C. mains 200-230-250 v. 50 c/cs. Output for 3 and 15 ohms speakers. Kit is complete to last nut. Chassis is fully punched. Full instructions and point-to-point wiring diagrams supplied.

Only **8 GNS.** or factory built **45/-** extra. Carr. 10/-. If required louvred metal cover with 2 carrying handles can be supplied for **18/9. TERMS ON ASSEMBLED UNITS. DEPOSIT 25/6 and nine monthly payments of 25/6.** Send S.A.E. for Illustrated leaflet detailing, Ready-to-assemble Cabinets, Speakers, Microphones, etc., with cash and credit terms.

LINEAR "DIATONIC" 10-WATT HIGH FIDELITY AMPLIFIER. Incorporating pre-amp. For A.C. mains input 200-230-250 v. 50 c.p.s. A compact attractively finished unit with two separately controlled inputs and outputs for 3 and 15 ohms speakers. Separate Bass and Treble controls. Five latest type miniature Mullard valves. Only **12 Gns.** Send S.A.E. for leaflet and credit terms.

W.B. "STENTORIAN" HIGH FIDELITY P.M. SPEAKERS, HF1012, 10 watts 15 ohm (or 3 ohm) speech coil. Where a really good quality speaker at a low price is required, we highly recommend this unit with an amazing performance. **£4/10/9.** Please state whether 3 ohm or 15 ohm required.

P.M. SPEAKERS. 2-3 ohm 5in. Goodmans **17/9.** 7×4in. Elliptical **19/9,** 6½in. Rola, **19/9,** 8in. Rola, **19/9,** 8in. Goodmans **21/9.** 10in. R.A., **28/9.** 12in. Plessey **29/11.** 12in. Plessey 3 ohms, 10 watts, 12,000 lines, **59/6.**

SUPERHET RADIO FEEDER UNIT

Design of a high quality Radio Tuner Unit (specially suitable for use with any of our Amplifiers). A Triode Heptode F/changer is used. Pentode I.F. and double Diode Second Detector, delayed A.V.C. is arranged so that A.V.C. distortion is avoided. The W.Ch. Sw. incorporates Gram. position. Controls are Tuning, W. Ch. and Vol. Output will load most Amplifiers requiring 500 mV input depending on Ae location. Only 250 v. 15 mA. H.T. and L.T. of 6.3 v. 1 amp. required from amplifier. Size of unit approx. 9-6-7in. high. Send S.A.E. for illustrated leaflet. Total building cost is **£4/15/-**. Point-to-point wiring diagrams and instructions, **2/6.**

Radio Supply Co. (LEEDS) LTD.

Personal Shoppers to **MAUDE ST.** (Opposite Parish Church School) **LEEDS, 2.**
Mail Orders to **29-31, Moorfield Road, LEEDS, 12.**

Terms: C.W.O. or C.O.D. No C.O.D. under £1. Postage 1/9 extra on all orders under £2. 2/9 extra under £5 unless carriage charge stated. Full Price List 6d. Trade List 5d. Open to Callers: 9 a.m. to 5.30 p.m. Saturday until 1 p.m. S.A.E. please with all enquiries.

PROOPS BROTHERS LIMITED

RECEIVERS



R.1132A
Frequency 95-126 Mc/s. 11 Valve Superhet. RF. Amp. VR.65, Frequency Changer VR.65, Local Oscillator VR.66, Stabilizer VS.70, I.F Amplifiers VR.53's, B.F.O. VR.53, Detector VR.54, A.F. Amplifier VR.57, Output VR.37 Switched A.G.C., Variable B.F.O. Standard Rack Mounting, easily converted to receive Wrotham without alteration to wiring. Circuit diagram and conversion instructions supplied. Size 19 × 10 × 10in. **£3.7.6**
Carriage 10/-.



R.1392
95-150 Mc/s (2-3 Metres). 15 Valve Superhet. 1st and 2nd R.F. EF54, 1st Local Oscillator SP61, 2 Oscillator Multipliers EF54, 3 IF's EF.39, AGC. 6Q7, Output 6J5, Muting EA.50, Noise Limiter EA.50, BFO. 6J7, Mixer EF.54, Detector 6Q7. Normally Crystal Controlled, but can be tuned over 95 to 150 Mc/s. Power supply required = 240-250 volts at 80 mA. 6.3 volts at 4A. Standard Rack Mounting, 19 × 10in. Complete with valves and circuit diagram. Air Tested. **£6.19.6.** Carriage 10/-.

ARR3
13 Valve 60 Mc/s. FM Receiver which can easily be converted to receive B.B.C. transmissions—many supplied by us to B.B.C. engineers for their personal use. 1st and 2nd RF, Mixer, Osc., 1st, 2nd and 3rd IF's all 12SG7's. Limiter and Detector 12H6. 1st AF 12SQ7. Output 12A6. A.F.C. 2 × 12SH7. Magic eye 12U5G. Utilizes Foster Seeley discriminator. Complete with circuit diagram and full conversion instructions. **£6.0.0.** Carriage 7/6.

RECEIVER UNIT EX.1143A



Suitable for conversion to 2 Metres or Wrotham FM transmissions.
Valve line-up: Four EF.50's; One EL32; Two EF.39's; One EBC.33; One EA.50. Circuit diagram supplied with each unit. Complete with valves. **£1.5.0.** Carriage 3/6.

AN/APNI TX/RX

Frequency modulated by moving coil transducer — heart of famous W.W. Wobulator. Freq.: Receiver, 400-450 Mc/s. Transmitter 418-462 Mc/s. Easily converted for radio control or 70 cms. Complete with 14 valves, 4-12SH7, 3-12SJ7 2-12H6, 2-955, 2-9004 and 1-VR150. Contains a host of first class components including relays and close tolerance resistors. Brand new, at less than breakdown price.
£1.10.0
Carriage 7/6

SIGNAL GENERATOR Type 52A
Complete in transit case with four calibration charts, leads, dummy antenna and circuit. Spec.: Input, 230v 50 c/s. Freq.: 6-52 Mc/s. in Four ranges. Coarse and fine attenuators. Int. and Ext. Mod. Output, 0.5 v. to 100 mV. Impedance 70 and 100 ohms. Brand new. **£10.0.0.** Carriage 10/-. Complete photostat handbook supplied on request for 4/6 extra.

SIGNAL GENERATOR AND WAVEMETER Type W 1649
In copper lined case. Freq.: Sig. Gen. 140-240 Mc/s. (tolerance 0.5 Mc/s.). Wavemeter 150-235 Mc/s. (tolerance 0.2 Mc/s.). Complete with valves 4 VR91 and 1 VR135, and 5 Mc/s. crystal. Requires 6.3v and 120v power supply. **£2.10.0.** Carriage 10/-

RELAY BARGAINS



LOW VOLTAGE PRECISION RELAYS
Specially developed by a famous manufacturer to meet the rigorous demands of RAE Spec. DES1. Performance is unimpaired at 200 vibrations per second. Actuates 2 pole changeover switch rated at 25A, from energizing potential of 24 volts, 5 watts. Changeover occurs at 16-17 volts and reverses changeover when voltage drops by one third of energizing value. Heavy-duty silver contact switch unit mounted on low-loss base. Unit protected by metal dust cover. Size 2⅛ × 1⅛ × 1¼in. Weight 9 oz. Absolutely brand new in original packing. **7'6** post free.

RELAYS
Carpenter type 5C9 polarized 1685 ohms each coil. Current 100-200 μA, **22/6** post paid. Sensitive U.S. type single pole changeover relay. Heavy duty **12/6** post paid.

12 VOLT SOLENOID

Powerful solenoid with lever mechanism giving a mechanical advantage of approx. 4 : 1 (⅛in. travel = 3½in. arm). Consumption 350 mA. Ideal for remote controls, model railways and mechanical indicators. Bargain offer.
3 for 10'- post paid.

ELECTRIC TIME SWITCH



4½-6v battery driven precision clock. Current negligible. Can be set to operate at any period between 15 minutes and 44 days. Ideal for automatic "lighting-up" of parked cars etc. and many other uses. In plastic case.
12'6 post paid.

EXCLUSIVE OFFER OF Low-voltage Halogen-Quenched GEIGER-MUELLER TUBES

Large contract purchase from famous manufacturer enables us to make an exclusive offer of these highly sensitive gamma counters. Straight from production, individually tested fully guaranteed at 55/- each.

SPECIFICATION
Effective length 11.8 cm. Standard British 4-pin base.
Background count 90/min.
Plateau: Minimum length 80 v. Slope 5% per 100v.
Working potential: 400-450 v.
Current: .001 μA to 1μA at 100 to 6,000 c/min.
Response: Exceeds 30,000 c/m.
Dead time: 100μ sec. at 6,000 c/m Rise Time 5 to 10μ sec. at 6,000 c/m.
Temperature range—55°C to + 60°C. Gamma Efficiency 1%. Stainless iron electrode.

PORTABLE 70 cm. PRECISION FOR ONLY 57/6

Carriage paid

TS184 A/AP
Precision 70 cm. test gear for Mobile Hams, Amateur T.V. and Radio Control enthusiasts. RESONANT CAVITY WAVEMETER calibrated 400-430 Mc/s. Tuning stops adjustable to any 30 Mc/s band within the 400 to 470 Mc/s coverage.
Calibrated scale rack and pinion drive piston input attenuator and alternative fixed coupling loops input provides facilities for use as a signal generator. Plug-in "Telescopic Probe Antenna" and 6J6 detector and Monitor amplifier 2-600 ohm phone jacks for modulated signals. Panel output terminals for metering 6J6 output current. Power required = 6 volts at 300 mA and 30 volts at 0.5 mA.
24-page booklet supplied with each unit giving comprehensive circuit description, diagrams and suggested modifications, etc.

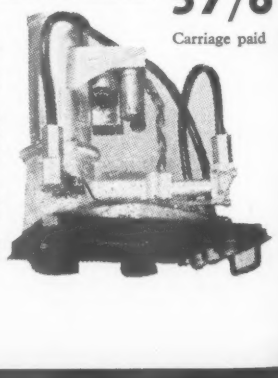

The Walk-Around Shop

BARGAIN PRICE TABLE-TOP TRANSMITTER

No. 36 SENDER

£12.10.0

complete — Carriage 30/-

GET THIS NEW RIG ON THE AIR IN 5 MINUTES FLAT

The best ham buy for a very long time

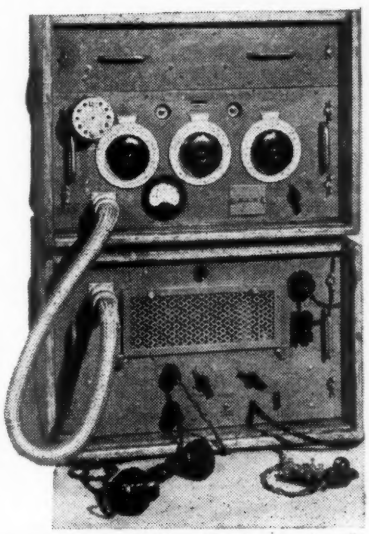

A unique opportunity to obtain a complete AIR TESTED 10-60 Mc/s 50 watt transmitting station at an unrepeatable price.

In two units, each housed in a handsome solid oak cabinet with slide out front. Supplied complete with circuit diagram, all connecting cables, hand-set and dummy aerial packed in RF Unit stowage drawer. In excellent condition.

Check this specification against cost.

Frequency coverage: 10-20 Mc/s, 20-40 Mc/s and 40-60 Mc/s by plug-in coils. CW, M.C.W. or R/T Coils supplied cover 10-40 Mc/s only, but third set can easily be made up.

Power Supply: 100-110 volts and 200/250 volts, 40-60 cycles.

Power required, approximately 350 watts.

R.F. Unit: Contains Master Oscillator (with or without crystal control), Frequency Doubler and Power Amplifier. Valves: M.Osc. 807, Intermediate 807, PA2 × 807, Voltage regulation 2×S130. Also 2×EM1 magic eye tuning indicators and osglim neon lamp modulation depth indicator. 0-200 m/A PA anode current meter. Size 24½×16½×16½in. Weight 90 lb.

R.F. Unit. Contains Power Pack, Speech Amplifier and Modulator, 3×FW4/500 rectifiers provide separate H.T. supplies for RF unit, Bias and Modulator. Speech Amplifier 6C5G, Modulator 2×6C5G drivers and 2×807 output. Size 24½×16½×14½ in. Weight 120 lb.

VELODYNE REVERSING MOTOR-GENERATORS

type 74



Motor Armature 5A, Field 80 mA. Generator Armature 56v D.C., Field 24v D.C. Size 8 × 3½ × ¼in. dia. spindle.

£1.15.0 post paid

INFRA RED VIEWING MONOCULAR

See in the dark with equipment specially developed for night-driving, reconnaissance, sniping etc. Sealed unit with focussing eyepiece and incorporating Caesium cell and push-button operated Zamboni pile. Brand new in superb hide binocular type carrying case.

£1.0.0 p.p.

VIEWING LAMP

Weatherproof car spotlamp providing a powerful source of infra-red rays through easily removable filter. Takes standard 12v. bulb. Swivelling single-point bumper fitting. Brand new. **17/6.** p.p.

PROOPS BROTHERS LIMITED

DEPT. W, 52, TOTTENHAM COURT ROAD, LONDON, W.1.

Shop hours 9 a.m. to 6 p.m. Thurs. 9 a.m. to 1 p.m. **OPEN ALL DAY SATURDAY**

Telephone: LANgham 0141 *Carriage prices quoted apply to England & Wales only.*

ROOM THERMOSTATS
By a famous manufacturer. Voltage 0/250 v., maximum current 15A. Temperature control range 50°F to 80°F. Contemporary design in cream hammer finish, complete with wall fixing plate and full installation instructions. Brand new. **15/-.** Carr. 2/-.

TRANSFORMERS 230-250 volts 50 c/s.
Heater 6.3v, 1.5A, 6/6, plus 1/- carr. **Miniature mains** 230v at 40 mA and 6.3 v. at 1.5A, 12/6, plus 1/- carr. **Charging** 9v and 17v at 3A, 15/6, p.p. **Mains isolating** 250v/220v or 250v/110-0-110v out OR double wound auto 250v in, 110v out, 5/-, carr. 1/6. **Heavy duty mains changing** (Admiralty Pattern), Primary screened from secondary. Totally enclosed in 7×6×8in. black steel case—terminals inside lid. **£1.0.0.** p.p.

OUTPUT TRANSFORMERS
Plessey standard miniature output transformers. Ratio 45 : 1 and 55 : 1 4/6 p.p. Please state ratio required.

FULL-WAVE CHARGING RECTIFIER—
24v 1.5A. 12/6 p.p.

LOUDSPEAKERS
Tannoy waterproof external 8 watt unit 7½ ohm impedance. Complete with matching transformer. Brand new, **£1.0.0,** plus 3/6 carr.

HEADPHONES
High resistance balanced armature **£1.0.0,** p.p.
Low resistance balanced armature **8/6,** p.p.

MICROPHONES
Acos crystal inserts, 4/6 post paid. American throat microphones type T.S.300, including socket, 3/- post paid. Aircrew type electro magnetic microphones with switch, 2/- post paid. Carbon type in black crackle case, 12/6 post paid.

R.F. UNIT.
Freq.: 200 Mc/s. With 3 956 valves. Size 8×3×4in. 15/-, p.p.

MINIATURE I.F. STRIP—9.72 Mc/s.
Complete and unused with circuit, less valves—2 EF92, 3 EF 91, 1 EB 91. 12/-, p.p.

MULTI-RANGE TEST METER
Ranges 0-1.5v, 0.3v; 0-60mA; 0-500 and 0-5000 ohms. Easily read open scale. Simply extended to provide useful pocket fault finder. Size 2½ × 3½ × 3½in. Brand new 8/6. Carr. 1/6.

GYRO UNIT AND INVERTER
Can be used as 12v D.C. motor for models; ideal also for experimentation and gyro demonstration purposes. Inverter: 12v DC input, 3-phase 190 cycle output Size 4×4×3in. Gyro unit: operates on 3-phase output from inverter. Peak speed 11,400 r.p.m. Caged. Precision made equipment, 12/6 per pair. Carr. 3/-.

DYNAMOTOR
Brand new, boxed U.S. Dynamotor. 28v DC input, 330v 170 mA output. Fully smoothed by screened choke/condenser filter unit in base. Dynamotor size 3½ × 6in. Black crackle finish 17/6, p.p.

APN1 TRANSDUCER
The heart of the W.W. TV wobbulator (described on page 252 of June 1956 issue). Brand new, 7/6 post paid.

RADIO ALTIMETER
5 mA panel mounting with 3in. dia. 8in. circular scale. Basis for sensitive multimeter. Brand new, boxed, 7/6, post paid.

ANTENNA RELAY UNIT
Contains 2½in. panel mounting 2 mA meter with separate thermocouple for measuring R.F. and change-over relay. In metal case 3½ × 4½ × 3½in. with ceramic stand-off terminals, 12/6, post paid.

BOLT CROPPERS
9in. long, extremely powerful, 2/6 post paid. Folding type 18in. long—will cut through ½in. bolt or cable, 7/6 post paid.

CONNECTOR BLOCKS
G.E.C. Standard 12 way "chocolate block" connectors, 3 for 6/6 post paid.

POCKET MARCHING COMPASS
In black plastic case with sighting reflector inside lid and automatic pointer lock. Luminous dial, pointer and sighting lines. Brand new, with instructions, 12/6, carr. 1/-.

TANK PERISCOPES
American type—7/6 post paid.

SIGNAL LAMPS
24v Sealed Beam Units, 16/6 post paid.

ASTRO COMPASSES
Brand new in transit case, 23/- post paid.

DRIFT SIGHT Mk. 4A
13in. long × 1¾in. dia. In wooden case, 12/6 post paid.

GROUND POSITION INDICATORS
Cohtains 24v. motor and follower motors, large quantity of gearing, etc., 35/-, post paid.

LASKY'S RADIO

SAVE POUNDS! ORDER BY POST IF YOU CANNOT CALL

SECURE THIS HI-FI AMPLIFIER SUPER BARGAIN!



Famous make, new and unused

LISTED AT 13 GNS

LASKY'S PRICE £7.7.0 Post & Pkg. 5/-.

For mains 200/250 v. A.C.

★ 4 valves: 2 EF86, 1 EL84 and EZ80.
★ Overall Freq. Response 20 to 35,000 c.p.s. Flat approx. ±1dB.
★ Hum level better than 65dB below full input.
★ Output 4 watts max. with choice of 3 or 15 ohm imp. by means of switch.
★ Separate bass and treble controls and 4-position input selector switch.

CABINET AVAILABLE, 11¾ × 6½ × 7¼in. deep, polished medium oak veneer. Price, if purchased with Amplifier, **30/-.**

MULLARD 510 AMPLIFIER KIT
WITH T.C.C. PRINTED CIRCUIT

All specified components and your choice of transformers and chokes by Partridge, Haddon, W/B, Ellison or Gilson.

COMPLETE KIT of parts and printed circuit as low as **£9.9.0** Book 3/6 Details on request. post free.

Printed Circuit separately 22/6. Also available built ready for use. Price according to transformers used.

LASKY'S 4-WATT PORTABLE GRAM. AMPLIFIER

Will suit any crystal or magnetic pick-up. Uses 3 valves: EL84 output, L63 and EZ80 rect.

COMPLETE with 3 valves and knobs. Carr. 5/-. **79/6**

Details and circuit diagram post free.

LASKY'S PORTABLE GRAM. AMPLIFIER KIT

2 watts. Size approx. 6¾in. × 3¾in., max height 5in. Uses EL84 output and 6X4 rectifier, double-wound transformer tone control output transformer, etc.

COMPLETE KIT, including valves, printed circuit, full instructions. **49/6** Carr. 2/6.

LASKY'S LATEST TAPE RECORDING SCOOP!

YOU CAN BUILD OR BUY THIS DE LUXE RECORDER FOR ONLY 39 GNS

TODAY'S VALUE 64 GNS

COMPLETE TAPE RECORDER: Deck, Amplifier and Speaker, fitted into Case, plus Lustraphone Mike and 1,200ft. of Tape, absolutely ready for use. **39 gns**
LASKY'S PRICE
Carr. & Insur. 21/-.

All the component parts of this recorder are available separately as below.

COLLARO TAPE TRANSCRIPTOR, Mark III, 3-speed Tape Deck. **£17.19.6**
Carr. & Pkg. 12/6.

TAPE AMPLIFIER, complete with 6 Mullard valves, EF86, ECC83 (2), EL84, EM81 and EZ81 rectifier. Separate bass and treble controls, 2 inputs and 2 volume controls which can be mixed (also can be used separately for amplification), gram. p.u. or microphone. EM81 magic eye level indicator, also extension l.s. jack and monitor jack. Price of the complete Amplifier built and wired ready for use. **£16.19.6**
Carr. & Pkg. 7/6.

DECK AND AMPLIFIER, wired and connected. **31 gns**
Carr. & Ins. 21/-.

CASE as illustrated, solidly made of best quality laminated wood, superbly finished two-tone simulated lizard, with plastic fret, rubber feet, removable lid. Overall size: 18½ × 15½ × 7½in. **£4.9.6**
Carr. & Pkg. 5/-.

SPEAKER, 10 × 7in. elliptical. **32/6**
Carr. 2/6.

Smaller 7 × 4in. Speaker **19/6,** *can be used.*

LUSTRAPHONE "LUSTRETTE" dynamic MIKE, complete with jack, especially matched with above Amplifier. Carr. 1/6. **£3.9.6**

MAGNETIC TAPE, famous make, P.V.C. base, 1,200ft. **35/-**
Carr. 1/6.

(Note: All the above if purchased individually would cost £46/5/6.)

SPECIAL OFFER! MAGNETIC RECORDING TAPE



FAMOUS MAKE. P.V.C. base on latest type plastic spools. Not surplus but brand new, perfect and boxed. Will work with any Recorder. Limited quantity only. Send now! Satisfaction or money refunded.

1,200ft. Standard on 7in. spool. List 35/-. Lasky's Price **21/-**
850ft. Standard on 5¾in. Continental spool. List 28/-. Lasky's Price..... **16/6**
600ft. Standard on 5in. spool. List 21/-. Lasky's Price **12/6**
300ft. Standard on 4in. spool. List 10/6. Lasky's Price..... **7/11**
1,200ft. Long Play on 5¾in. Continental spool. List 35/-. Lasky's Price..... **22/6**
850ft. Long Play on 5in. spool. List 28/-. Lasky's Price **16/6**
225ft. Long Play on 3in. spool. List 8/6. Lasky's Price **6/6**

Post. 1 spool 1s. 6d. Orders over 70/- post free.

ANOTHER LASKY BARGAIN!
13-CHANNEL ADAPTOR



Brand new and unused complete as shown LIST PRICE 7½ GNS

LASKY'S PRICE 49/6 Post & Pkg. 3/6

By famous manufacturer of the Pye group. This is a superhet Front End Tuner incorporating 2 valves. Covers all Band I and Band III channels. I.F. output 33-38 mc/s. Power requirements: 6.3 v. .3 amp. heaters, 200/220 v. h.t.

In smart wood Cabinet, walnut veneer, 7½ × 6 × 5in., complete with adaptor plugs, 2 new Mullard valves, knobs, in makers' original cartons. Note: unit can be removed from Cabinet and fitted inside your TV set if designed.

LONDON'S HI-FI SPECIALISTS!

Visit our Tottenham Court Road address for selective Demonstrations of the latest Hi-Fi Equipment.

AMPLIFIERS. Quad, Rogers, Leak, R.C.A., Pamphonic, Dulci, W/B, Armstrong A10 Mk. II.

SPEAKERS. Wharfedale, Goodmans, G.E.C., Lowther, Lorenz, Philips.

PICK-UPS. Collaro, Garrard, Connoisseur, Leak, B/J, Ortophone, Goldring.

TRANSCRIPTION TURNTABLES. Collaro, Garrard, Lenco, Connoisseur.

TAPE RECORDERS. Grundig, Elizabethan, Brenell, Truvox, Sound Vortexion, Ferrograph, Magnavox, Harting.

CABINETS. Wide selection including the new G-Plan Contemporary Cabinets.

RADIO · TELEVISION · HI-FI · ELECTRONICS · RECORDERS

LASKY'S RADIO

NOW READY!

LASKY'S FULLY TRANSISTORISED PORTABLE FOR HOME CONSTRUCTION

Note these Star features.

★ Printed Circuit. 6¼in. × 2¼in.
★ 200 milliwatts p.p. output.
★ Uses 7 Transistors and 1 germanium diode.
★ Ferrite rod aerial.
★ Fully tunable.
★ 6 v. operation. Very low consumption.
★ Choice of 7 × 4 elliptical or 3½in. P.M. Speaker.
★ Choice of cabinet.

Circuit diagram and full building instructions supplied.

CAN BE BUILT FOR

£9.19.6 Post & Pkg. 3/6

Full data and building instructions available separately, 1/6 post free.

LASKY'S TRANSISTOR SUPERHET TUNER

For construction on Printed Circuit. Size 3¾ × 3½in. Uses 3 R.F. transistors, 1 germanium diode, 3 I.F. transformers. Ferrite rod aerial. Operates from 6 v. battery and 1.5 v. cell.
Can be built for **£5.12.9**
Post 3/6
Full details on request.

LASKY'S TRANSISTOR AMPLIFIER KIT

200 milliwatts. Output impedance 5 ohms. Operates from 6 v. battery. Miniature size: 3½in. × 3½in., height can be under 1in. COMPLETE KIT including 4 Transistors, PRINTED CIRCUIT, full instructions. Post 3/6. Full details on request. **79/6**

TRANSISTORS

R.F. P.N.P. Junction Type, suitable for medium and low freq. oscillators freq. changers and I.F. amplifiers (1.5 to 8 Mc/s). **21/-**

(Double spot—yellow and red.)

AUDIO P.N.P. Junction Type, suitable for high gain and low freq. amplifiers, and for output stages up to 250 milliwatts. **10/-**

(Double spot—yellow and green.)

Post free

All types of MULLARD, B.T.H., BRIMAR and GOLTOP transistors in stock.

LASKY'S F.M. TUNER

PRINTED CIRCUIT VERSION OF G.E.C. 912 "F.M. PLUS" TUNER FOR HOME CONSTRUCTION

Uses 5 valves, 2 germanium diodes and brand new T.C.C. condensers. The PRINTED CIRCUIT ensures that the I.F. and R.F. amplifiers are extremely stable at maximum gain and results are consistent on all tuners.

CAN BE BUILT FOR (including valves) **£7.19.6**
Post and Pkg. 2/6.

G.E.C. FM TUNER BOOK plus our full data and Shopping List, 2/6 post free. All parts available separately.
ALIGNMENT SERVICE available.

JASON F.M. TUNER

Special Parcel containing data book, chassis front panel, dial, drive, tuning condenser, full sets of coils, I.F.s, ratio detector, etc. Post 2/6 **68/9**
DATA BOOK with price list 2/-. This tuner can be built for **£6/15/-**, post 3/6.

JASON "ARGONAUT"

Super-sensitive AM/FM Tuner. Complete parcel with power supplies. **£13.19.6**
Post 3/6.
DATA BOOK 2/- post free.
Chassis Assembly **57/9**, post 2/6.
I.F. and Coil Set **78/-**, post 1/6.
All components available separately.

ALL TYPES F.M. TUNERS

DULCI, QUAD, LEAK, ROGERS, PAMPHONIC, etc., in stock.



TELETRON "COMPANION"

3-TRANSISTOR POCKET RADIO. T.R.F. circuit covering med. and long waves, with balanced armature output. Ferrite aerial. Size: 4¼ × 3 × 1in. **89/6**
CAN BE BUILT FOR ONLY
Full instructions and price list 6d. post free.

LASKY'S NEW MIDGET T.R.F.



CAN BE BUILT FOR ONLY 99/6

Post & Pkg. 5/-

Handsome contemporary design case, overall size 8¼in. wide, 4¼in. deep, 5in. high. 2 latest double-purpose valves EBF89 and ECL80, contact cooled rectifier. For A.C. mains 200-250 v. Med. and long wave, 5in. P.M. speaker. Plastic cabinet in cream, pastel green, pink, blue. FULL DATA, instructions, circuit diagram, shopping list 1/6. All components available separately.
CABINET only, as illus., 14/-, plus 4/6 post and pkg.

H.P. TERMS & CREDIT SALES AVAILABLE

AUTOCHANGERS

All types of GARRARD, COLLARO and B.S.R. actually in stock.

MOVING COIL P.M. SPEAKERS

2½in. **17/6**. 3in. and 3½in. **19/6**. 5in. **16/6**. 6½in. **17/6**. 8in. **21/-**. 10in. **29/6**. 12in. **29/6**. 6½in. with transformer **21/-**. 7 × 4in. **19/6**. 10 × 7in. Elliptical **32/6**.

TRUVOX "SENIOR" SPEAKER DRIVING UNIT (Pressure Type)

Power handling cap. 15 watts peak. With 12ft. cinema horn reproduces down to 17 c.p.s.
List £7/15/-. Carr. 5/-. LASKY'S PRICE **59/6**

15in. DUAL CONCENTRIC SPEAKERS £16.19.6

Full details on request.

HI-FI ELECTROSTATIC SPEAKERS ("TWEETERS")

L8H75	L8H518	L8H100
8/-	12/6	14/-

LPH65 (moving coil) **39/6**.

POCKET VOLT TEST METERS. Two ranges D.C. 0-250 v. and 0-25 v. Complete with leads in leather case.
LASKY'S PRICE **12/6**
Post free.

CHASSIS

We have the largest stocks of chassis A.M. and A.M./F.M. A.M. chassis, 1, m. s, from **7 Gns.** AM/FM chassis.....from **14 Gns.**

DULCI HI-FI CHASSIS TUNERS AND AMPLIFIERS

Full range in stock.

BUILD THIS 4-VALVE S/HET PORTABLE



FOR ONLY £7/7/-, plus 3/6 carr. and pkg., you can build this med. and long wave Portable using all brand new components and valves, only batteries extra. Printed circuit, circuit diagram and full instructions supplied.
Circuit diagram and full data 1/6 post free.

FOR ONLY £9/9/- plus 3/6 carr. and pkg. you can build this job as a mains and battery Portable using our specially designed build-it-yourself Power Unit for 200-250 v. A.C.

COLLARO 4-SPEED MIXER AUTO-CHANGERS

Incorporating auto and manual control. Complete with Studio crystal p.u. and sapphire stylus. **RC.456**. List £13/17/-.
LASKY'S PRICE **£7.19.6**
Post 3/6.
Latest model **RC.457** or "**Continental**" **£8/19/6**. Post 3/6.

COLLARO 4-SPEED SINGLE RECORD PLAYER



Model 4/564 complete with Studio T or O p.u. crystal cartridge and styli. Automatic stop.
LASKY'S PRICE **£6.19.6**
Carr. 3/6.

Collaro "Junior" 4-speed motor and pick-up with HGP59 cartridge. **92/6**
Post free.
Motor only **59/6**, post 2/6.
Pick-up only **29/6**, post 2/6.

B.S.R. TU9, 4-speed motor and latest B.S.R. "ful-fi" p.u. **94/-**
Post 3/6

Delivery from stock of the **COLLARO 4-speed Transcription Turntable**
4T200/PX **£19/10/-**.
Less pick-up **£14/18/-**. Carr. Paid.

PICK-UP CARTRIDGES

GARRARD MAGNETIC t/o, p.u. Cartridges. Type TOM/2, less than half price. **30/-**

ACOS turnover, complete with l.p and standard styli. LIST £2/1/7.
LASKY'S PRICE **18/-**
Post 1/-

20,000 VALVES IN STOCK

Brand new surplus and imported valves, also full stocks of B.V.A. valves and C.R. Tubes. List post free.

LASKY'S (HARROW ROAD) LTD.

LASKY'S RADIO

42 TOTTENHAM COURT ROAD, W.1.
Nearest Station Goodge Street
MUSeum 2605.

370 HARROW ROAD, PADDINGTON, W.9.
(Opposite Paddington Hospital)
LAD 4075 and CUN 1979.

Open all day Saturday. Early closing Thursday (both addresses)

ALL MAIL ORDERS TO HARROW ROAD PLEASE

CLYNE RADIO LTD.

162, HOLLOWAY ROAD, LONDON, N.7

NORth 6295/6/7

ALSO AT:—18, TOTTENHAM COURT ROAD, LONDON, W.1.

MUSeum 5929/0095

(50 yards only from Tottenham Court Road Tube)

All post orders and correspondence to 162, HOLLOWAY RD., LONDON, N.7.

TRANSISTORS!!!

SURPLUS—P.N.P.
RED SPOT (Audio/Experimental Applications) ..... 7/6 ea.
WHITE SPOT, R.F. up to 2.5 Mc/s. ..... 15/- ea.
STANDARD—
DRIMAR
T.S.1 ..... 18/- ea.
MULLARD
OC45 R.F. up to 6 Mc/s. ..... 35/- ea.
OC70 ..... 21/- ea.
OC71 ..... 24/- ea.
OC72 ..... 30/- ea.
FTE
V6/R2 R.F. up to 4 Mc/s. ..... 24/- ea.

(ALL POST FREE)

AT LAST!

LIMITED STOCKS ONLY

The Very Latest

COLLARO MK. IV TAPE TRANSCRIPTOR



SUBJECT TO BEING UNSOLD. £25, PLUS 7/6 C. & F. PRE-AMPLIFIER AND POWER PACK FOR USE WITH THE ABOVE DECK IS ALSO AVAILABLE IN LIMITED QUANTITY AT £21, PLUS 5/6 P. & P. WIRED TO TRANSCRIPTOR £2 EXTRA. H.P. OR CREDIT SALE TERMS AVAILABLE.

PORTABLE GRAM AMPLIFIERS

RC1.A AMPLIFIER. A small high-quality gramophone amplifier employing the latest circuitry and highly efficient miniature valves. Very neat chassis finished in bronze stove enamel. Size (overall) 5½ × 4 × 5in. Valve. 6X5, ECL82. Output 3 watts max. Controls. Volume. Tone/On / Off. For use on AC mains 200/250 v.

Price £3/19/6 plus 2/- P. & P.

RC2A. Small PRINTED CIRCUIT single-valve high-gain amplifier for the smaller type of portable. Employs latest type ECL80 valve. Further details on request. Price only 59/6 plus 2/- P. & P.

RC3A. A superior quality 3-valve amplifier employing EZ80, EL84 and ECC83. With separate bass and treble controls. Further details on request. Price: £3/19/6 plus 2/6 P. & P.

RC4.A (STALLION). This is supplied complete with high flux 8in. P.M. Speaker and Baffle. Incorporating three octal type valves 6Q7, 6V6 and 6X5, this robust and well-made unit is ideal for use in the larger type of record player and is equally suitable for use in conjunction with a radio feeder unit. Separate bass and treble controls are provided: also provision is made for an extension speaker and mains supplies to gram. motor. Output approx. 4 watts. Size overall 13in. × 4in. × 9in. high. For use on A.C. mains 100/200/250 v. PRICE £5/19/6 plus 2/6 P. & P. H.P. terms £2/19/6 deposit and four monthly payments of 16/6.



Fits our portable cabinet "G" at 85/- without modification.

VALVES. We have perhaps the most up-to-date valve stocks in the trade. A stamp will bring complete list of brand new imported valve types, fully guaranteed. P.T. paid. Also all usual surplus types available such as 6V6GT, etc.

"R.E.P. MINI-7"

POCKET TRANSISTOR PORTABLE



AT LAST! A pocket-sized SUPERHET Transistor portable for medium and long-wave reception THAT REALLY WORKS, and at a price YOU can afford. The "R.E.P. MINI-7" utilises 2 White Spot, 4 Red Spot and 1 R.F. Transistor specially selected to our specification by leading manufacturer. Push-Pull output. Powered by two 3-volt miniature transistor batteries. Attractive plastic case, finished in dove grey and scarlet. Size only 5½in. × 3½in. × 1¾in. Incorporates Hi-Grade 2½in. P.M. Loudspeaker, Ferrite 6in. Aerial, also drilled and eyeletted Paxolin Chassis. Easy to follow practical and theoretical diagrams and itemised price list available separately at 1/6 post free. All necessary components at special inclusive price £10/10/-. Medium wave only £9/19/6, plus 2/6 P. & P.

★ STEREO! ★

STEREOPHONIC SOUND REPRODUCTION IS HERE! (TO STAY)

This wonderful new system adds positive realism to High Fidelity, brings the atmosphere and sense of "Being There" into your home. Be among the first to enjoy this wonderful experience with the

"TANBERG STEREO PLUS" TAPE RECORDER

This is a truly remarkable instrument, built to professional standards, producing an output of the highest quality when used with either Stereophonic or Single Track Tapes.

Look at these features :—

- Incorporates two matched High Fidelity 5 watt Amplifier
- 3 Speed Precision Tape Deck, 7½in. p.s., 3¾in. p.s., 1⅞in. p.s.
- Single Lever Control. ● Positive Braking. ● Frequency Response 30-16,000 C.P.S. ±2 D.B. at 7½in. p.s. ● Output matched to 3-5 ohms. May be heard at either of our Branches.

PRICE 114 GNS. Available on H.P. or Credit Sale Terms. Illustrated Leaflet on request.

RC4.FAM. AM/FM RADIOGRAM CHASSIS

A new style AM/FM Chassis employing a printed circuit FM Tuner section. Valve line-up: 8 valves ECC85, 6BA6, 12AH8, 6BA6, 6AL5, 6AT6, EL84, 5Y3. Most attractive dial 12 × 5¼in., fully illuminated with figures in green, red and white on black background. Four controls: Tuning Volume, Wavechange and Tone/On/Off. Dimensions (overall): 13 × 9 × 6in. Frequency coverage (four wavebands) 1,000-2,000 m. 200-550 m., 15-50 m., 88-100 mc/s. This is an excellent and very efficient chassis. Price £22/10/- plus 5/- P. & P.



BARGAIN CORNER

SPECIAL! A small three valve Portable Record Player Amplifier mounted on baffle 12 × 7in. with High Flux 6½in. Loudspeaker. Valve line-up ECC83, EL84, EZ80. Incorporates separate bass and treble controls. Max. output 3 watts. Will match all types of high impedance pick-up. Ready to use. £5/12/6 plus 3/6 P. & P.

New style Cabinet finished in two-tone Fawn and Brown Leatherette. Will accommodate above Amplifier and Baffle without modification, also most types of Ancillary Equipment. Overall size: 15 × 13½ × 8½in. Fitted with carrying handle. £3/9/6 plus 5/- P. & P.

NOTE: If both items purchased together they will be supplied at a special inclusive price of £8/7/6 plus 6/6 P. & P.

SET OF 10 HI-GRADE TWIST DRILLS. Brand new. All useful sizes from approx. 3/16in. to 1/32in. in cellophane packet 6/- a set, plus 9d. P. & P. (Ex-W.D.).

MULLARD 3-3 HI-FI AMPLIFIER to Mullard spec. Assembled tested, fully guaranteed. £8/8/0 plus 3/6 P. & P. Leaflet on request.

12in. BAKERS SELHURST LOUDSPEAKERS. 15 ohm, 15 watt, 30-14,000 cps. Few only. Brand new. £4/10/- plus 3/6 P. & P.

WIRING WIRE. 5 coils 10 yards each in different colours contained in cellophane bag, 5/- bag plus 9d. postage.

4-SPEED CHANGERS

B.S.R. MONARCH. Mixer Autochanger in cream and gold £7/19/6, plus P. & P., 3/6. Limited Stocks.



THE LATEST COLLARO "CONQUEST" 4-speed autochanger in cream with Studio "O" insert, £7/19/6, plus P. & P. 3/6

SINGLE UNITS

COLLARO AC 3/554. Three-speed single player for AC mains 200/250 v. Cream finish, complete with turnover crystal pick-up incorporating the well-known high output "T" type head. Strictly limited quantity at £5/19/6 plus 3/6 P. & P.

COLLARO 4-SPEED single record unit with separate pick-up and HGP59 crystal cartridge. Brand new, few only. £4/12/6 plus 3/6 P. & P.

CABINETS TO SUIT ALL TYPES OF EQUIPMENT. Prices from 45/-. Send stamp for illustrated list.

DULCI

DULCI H.3 AM/FM Chassis (6 valve) Covering Long, Medium and F.M. bands. Most attractive dial in RED and GOLD on BLACK background £20/17/- plus 5/- P. & P.
DULCI H.4 PUSH-PULL AM/FM chassis £29/3/10 plus 5/- P. & P.
All Dulci products available ex stock. Illustrated leaflets and H.P. terms available.
Demonstrating at both branches.

MULLARD 510 HIGH FIDELITY AMPLIFIER.

We are proud to be able to offer our printed circuit version of this excellent amplifier, with ULTRA-LINEAR PUSH-PULL output stage, giving an exceptionally high quality output of 10 watts (max.). Built-in Controls are provided for independent bass and treble Tone correction to suit all types of signal input. Will match all crystal or high impedance magnetic pick-up heads, F.M., A.M. or A.M./F.M. tuners or tape recorder output. All required components of best quality to Mullard Spec. are offered at a special inclusive price of £9/9/- plus 3/6 P. & P. Instruction Book, containing full constructional details. Theoretical, practical wiring diagrams, itemised price list available separately at 3/6, post free.

SURPLUS METER BARGAINS

We have large stocks of meters from 50 microamp to 300 v. and will be pleased to forward a complete list upon receipt of 3d. stamp.

METER RECTIFIERS 1 m/a. and 5 m/a. each at 6/6. Brand new.

Our advantageous H.P. and Credit Sale terms are available on any single item over £5. Your enquiries invited. ● If not stated, please add postage on orders under £1. Cash with order or C.O.D. (charges extra). ● Open: Tottenham Court Road: 9 a.m. to 6 p.m. Mon. to Fri., Sat. 1 p.m. Holloway Road: 9 a.m. to 6 p.m. daily Thurs. 1 p.m., Sat. 5.30 p.m.

★ TO BUILD YOURSELF ★

ALL PARTS AVAILABLE SEPARATELY

WE ARE THE EXPERTS IN THIS FIELD AND CARRY THE MOST COMPREHENSIVE STOCKS IN THE COUNTRY

(1)



(6)



(10)

	All required components at special inclusive price	P.&P.	Instruction Book and itemised price list available separately
(1) New Look " RAMBLER " all dry portable	£7 7 0	2/6	1/6
(2) " RAMBLER " Mains Unit (suitable for most portables)	£2 7 6	1/6	9d.
(3) " ECONOMY FOUR " T.R.F. Mains Receiver	£5 10 0	2/6	1/6
(4) " FAMILY FOUR " (our new T.R.F. Receiver)	£4 19 6	2/6	1/6
(5) " SUPERIOR FOUR " (Four valve mains receiver)	£6 9 6	2/6	1/6
(6) GRAM Chassis 5-valve Superhet	£8 8 0	2/6	1/6
(7) T.S.L. F.M. Tuner (self powered)	£10 19 6	3/6	2/6
(8) Standard JASON F.M. Tuner	£6 17 6	2/6	2/–
(9) Fringe area JASON F.M. Tuner	£7 15 0	2/6	2/–
(10) JASON " MERCURY " Switch tuned F.M. feeder	£9 19 6	2/6	2/–
(11) OSRAM 912 Printed circuit F.M. Tuner	£8 8 0	2/6	2/6
(12) JASON " ARGONAUT " AM/FM Chassis	£16 5 0	2/6	2/–
(13) JASON " ARGONAUT " AM/FM Tuner	£13 19 6	3/6	2/–
(14) F.M. Power Pack (suitable for most tuners)	£1 17 6	1/6	1/–
(15) R.C. 3/4 watt amplifier (with Bass, Middle & Treble controls)	£4 5 0	2/6	1/–
(16) 2-amp. Battery Charger	£1 18 6	2/6	3d.
(17) R.C. Transistor/Crystal Receiver (with 'Phones)	£1 17 6	1/3	3d.
(18) R.E.P. 1-valve Battery Receiver " " "	£2 2 0	2/–	9d.
(19) " CRY-BABY " ALARM (Baby Alarm) (see below)	£3 12 6	2/6	1/–
(20) " R.E.P. MINI-7 " Transistor Portable (see opp.)	£10 10 0	2/6	1/6
(21) MULLARD 510 Amplifier (Printed circuit) Ultra Linear version	£9 [illegible] 0	3/6	3/6
(22) ???			

(4)



(15)



(11)

(5)

The following are also available assembled and tested:—
(2) " RAMBLER " Mains Unit, £3/5/-; (7) T.S.L. F.M. Tuner, £13/15/-; (14) F.M. Power Pack, 52/6; (15) R.C. 3/4 watt Amplifier, £5/5/-; (16) 2-amp. Battery charger, 45/-; (19) " CRY-BABY " Alarm, 89/6; Instruction Books which contain full description, easy-to-follow practical wiring diagrams, theoretical diagrams, itemised price list, etc., are supplied free of charge with all parcels but may be purchased separately if required.
NOTE: (2) The " RAMBLER " Mains Unit is suitable for use with MOST all-dry portables.

THE CRY-BABY ALARM

We proudly present this latest addition to our wide range of popular kits to build yourself. Enjoy your leisure free from anxiety. This highly efficient unit is simple to assemble, extremely sensitive and may be installed in a matter of minutes. Completely SAFE employing a double wound mains transformer. Attractively finished in Red and Grey (washable) " Lionide " with cream plastic escutcheon. Size only 7¼in. × 3¼in. × 6¼in. Supplied in kit form complete with mike at ONLY 72/6 plus 2/6 P.&P. or assembled and tested 89/6 P. & P. 2/6. Suitable mike flex available at 3d. a yd. Instruction book and price list available separately 1/- post free. Note: For A.C. mains 200-250 v. only.



N.B.—All our T.R.F. circuits include specially wound Denco "Max Q" coils on polystyrene formers. Osmor High "Q" coils are supplied for our "RAMBLER" Superhet Portable.

No. 18 TRANSMITTER/RECEIVER UNIT!



We have just taken delivery of a quantity of these fine units, brand new and complete. This is a very good portable, self-contained transmitter/receiver designed for short range telephony and C.W. Range approx. 5 miles. Frequency coverage 6 mc/s.-9 mc/s. All accessories supplied, i.e., Headphone, Mike, Morse Key Aerial, comprehensive instruction book with circuit diagram. Valve line-up: 3 A.E.P.12, 2 AR8, 1 ATP4. Weight approx 22lb. Dimensions (overall): 8in. × 10in. × 17in. UNREPEATABLE at 99/6 plus 7/6 C. & P.

No. 38 TRANSMITTER/RECEIVER

(popular Walkie-Talkie). We have been most fortunate in obtaining a further supply of these complete stations comprising TX/RX unit, headphones microphone aerial, junction box battery satchel and full operating instructions. Range: approx. 5 miles. Frequency coverage 7.4-9 mc/s. ABSOLUTELY BRAND NEW 65/-. Export enquiries invited.

SPECIAL PURCHASE from MINISTRY BRAND NEW No. 17 Mk. II TRANSMITTER/RECEIVER

Built into strong wooden cabinet 18in. × 14in. × 9in. Complete with headphones and microphone. Range 5-8 miles with simple aerial. Frequency coverage 44-61 mc/s. (5-7 metres). Uses standard 120 v. H.T. and 2-volt L.T batteries. Complete with full operating instructions. 59/6.

CONSTRUCTOR'S NOTE!!
RADIO DATA BOOKS AVAILABLE, i.e., Valve guide, Colour code, etc. Send stamp for list.

HAVE YOU HAD A COPY OF OUR COMPREHENSIVE CATALOGUE?

This invaluable publication containing 109 well-illustrated pages of useful information, prices, etc., is available at 2/- post free. Complete coupon provided in BLOCK CAPITALS and forward to us, with your remittance, for immediate despatch.

CLYNE RADIO LTD.

162 Holloway Road, London, N.7.
and at
18 Tottenham Court Road, London, W.1.

CATALOGUE

To: Name .....
Address .....
.....
.....

W

ENCLOSED HEREWITH 2/-

DATE

CUT OUT ALONG DOTTED LINE

Stern's "fidelity" TAPE RECORDERS

THEY INCORPORATE . . .
- Choice of the latest COLLARO or TRUVOX Tape Decks.
- The model HF/TR2 " fidelity " AMPLIFIER.
- ROLA/CELESTION 10in. x 6 P.M. Speaker.
- 1,200ft. reel EMI Tape.
- ACOS Crystal Microphone.

THIS POPULAR RECORDER

IS OFFERED INCORPORATING EITHER

★ **The latest COLLARO TRANSCRIPTOR DECK**

or

★ **The NEW TRUVOX MK. IV DECK**

- You WON'T BUY better value.
- Truly " Hi-Fi " RECORDINGS are obtainable

● Call in and HEAR THEM, or send S.A.E. for ILLUSTRATED LEAFLET.

PRICE INCORPORATING COLLARO DECK, £49.10.0

CREDIT SALE. Deposit £12/8/- and 9 monthly payments of £4/10/8.

H.P. TERMS. Deposit £24/15/- and 12 monthly payments of £2/5/11.

PRICE WITH TRUVOX DECK INCORPORATING REV. COUNTER, £52.10.0

CREDIT SALE. Deposit £13/2/6 and 9 monthly payments of £4/16/3.

H.P. TERMS. Deposit £26/5/- and 12 monthly payments of £2/8/8.

(Plus £1/10/- carriage and insurance, of which £1 is refunded on return of Packing Case.)

STERN'S TAPE PRE-AMPLIFIER and ERASE UNIT

Provides the "Link" between the HIGH-QUALITY AMPLIFIER and TAPE DECK.



MODEL HF/TR1P . . . A completely assembled Pre-Amplifier with own Power Supply. Can be supplied correctly matched for use with Truvox or Collaro Decks, and incorporates Recording Level Indicator and Monitoring facilities.

Please send S.A.E. with any inquiry.

PRICE **£11.10.0** (plus 5/- carr and insurance)

The " fidelity " TAPE AMPLIFIER Model HF/TR2 including a separate small POWER SUPPLY UNIT

A COMPLETE KIT OF PARTS TO BUILD

FOR ONLY **£12.10.0** (Plus 5/- carr. and ins.)

Designed to meet the requirements of the enthusiasts for High Fidelity reproduction. It is based on the very successful design, completed by the Mullard Technicians and only new high-grade Components including MULLARD Valves are incorporated. **THE ASSEMBLY MANUAL PRACTICAL DIAGRAMS, etc., are available for 2/9 or send S.A.E. for brief details.**



WE ALSO SUPPLY THE FH/TR2 ASSEMBLED AND READY FOR USE FOR £16 (Plus 6/- carr. & ins.). **H.P. TERMS:** Deposit £8 and 9 monthly payments of £1. **CREDIT TERMS:** Deposit £4 and 9 monthly payments of £1/9/4.

HOME CONSTRUCTORS

BUILD YOUR OWN RECORDER — WE MAKE SPECIALLY REDUCED PRICES FOR COMBINED ORDERS — and have the following in STOCK.

★ **The COLLARO TRANSCRIPTOR DECK £22/-/-**

★ **The TRUVOX Mk. IV Tape Deck £27/6/-.** ★ **The TRUVOX MK. IV DECK with Rev. Counter £30/9/-.**

SPECIAL REDUCED PRICES - WE OFFER

(a) The **HF/TR2 AMPLIFIER** and **UNIT**, fully assembled, with the TRUVOX MK IV TAPE DECK for	£38	10 0
ALTERNATIVELY Amplifier and P/Unit KIT OF PARTS	£35	0 0
(b) The **HF/TR2 AMPLIFIER** and **UNIT** fully assembled, with the TRUVOX TAPE DECK incorporating PRECISION REV. COUNTER	£41	10 0
ALTERNATIVELY the Amplifier and P/Unit KIT OF PARTS	£38	0 0
(c) The **HF/TR2 AMPLIFIER** and **UNIT**, fully assembled, with the COLLARO TRANSCRIPTOR	£35	0 0
ALTERNATIVELY the Amplifier and P/Unit as a KIT OF PARTS	£31	10 0

Plus 12/6 Carr. and Insurance.

TO COMPLETE THE RECORDER . . . WE OFFER

The Portable Carrying Case . . . Acos Crystal Mike . . . Rolo 10" × 6" P.M. SPEAKER . . . 1,200ft. Plastic Tape

ALL FOR **£8.10.0** (plus 7/6 Carr. & ins.)

ADD TAPE TO YOUR EXISTING AMPLIFIER

(a) The Model **HF/TR1P TAPE PRE-AMPLIFIER** together with the TRUVOX MK IV TAPE DECK	£35 0 0
(b) ALTERNATIVELY as in (a) above but Truvox Deck incorporating PRECISION REV. COUNTER	£38 0 0
(c) The model **HF/TR1P TAPE PRE-AMPLIFIER** together with the COLLARO TRANSCRIPTOR Tape Deck	£31 10 0

PLEASE INCLUDE 12/6 to cover cost of Carriage and Insurance.

HIRE PURCHASE and **CREDIT SALE TERMS** are available on all equipment (excluding Kits of Parts). Send S.A.E. for details.

NOTE . . . The Collaro Transcriptor is in short supply and there may be a delay in delivery. We will however book an order.

The Deck switches of the Transcriptor have to be " wired-up." We will complete this wiring, for use with either the HF/TR2 or the HF/TR1P, for an extra charge of £1.

RECORD PLAYERS

THE VERY LATEST MODELS ARE IN STOCK

MANY AT REDUCED PRICES ! ! ! !

TRANSCRIPTION UNITS—AUTOCHANGERS SINGLE RECORD PLAYERS

Send S.A.E. for ILLUSTRATED STOCK LIST

A FEW CASH BARGAINS

● The latest B.S.R. Monarch 4-speed mixer Autochanger — entirely complete with crystal pick-up **£7.19.6**

● The latest Collaro 4-speed Mixer Autochanger — complete with the Studio " O " Pick-up **£7.19.6** Also available with the low gain Studio " P " pick-up for **£8/15/-.**

● The latest Collaro 4-speed Single Record Player complete with Studio " O " Pick-up **£6.19.6**

● The Collaro Junior 4-speed Single Record Player complete with separate Pick-up .... **£4.10.0** (This high output crystal pick-up is available separately for £1/12/6.)

(Carriage and insurance on above units 5/- extra.)

STERN'S " fidelity " F.M. TUNING UNIT



A 5-Valve Tuner incorporating the latest **Mullard Permeability Tuned Unit.** Price assembled less Power Supply.

£14.10.0

(Plus 7/6 carr. and ins.).

TERMS: (a) **H.P.** Deposit **£7/5/-** and 9 monthly payments of **18/4.** (b) **Credit** Deposit **£3/12/6** and 9 monthly payments of **£1/6/7.** Provides " Hi-Fi " reproduction with any make of Amplifier and many Radio Receivers. It incorporates: ● The latest Valve line-up—ECC85, 2 type EF85, EP91 and EM80. ● A " Magic Eye " Indicator. ● Power consumption is 1.7 amps. at 6.3 volts and 25 m/s at 250 volts

STERN'S "fidelity" COMBINED A.M. and F.M. TUNING UNIT

This is IDENTICAL to the Stern's F.M. Tuner illustrated above, but in addition incorporates the MEDIUM WAVE-BAND and thereby also provides a selection of foreign stations. PRICE **£18.18.0** (Plus 7/6 carr. and ins.).

TERMS:—(a) **H.P.** Deposit **£9/9/-** and 10 monthly payments of **£1/1/-**; (b) Credit Deposit **£4/15/-** and 9 monthly payments of **£1/14/7.** **Send S.A.E. if further data required**

HOME CONSTRUCTORS . . . You can build

(a) The " fidelity " F.M. TUNING UNIT FOR **£10.0.0**

(b) The "fidelity" AM/FM TUNING UNIT for **£13.10.0**

The COMPLETE ASSEMBLY DIAGRAMS and INSTRUCTIONS CAN BE OBTAINED FOR 1/6 each.

SPECIAL CASH ONLY OFFER ! !

This very attractive **PORTABLE AMPLIFIER CASE** together with a good quality **GRAM AMPLIFIER** and a matched **P.M. SPEAKER,** ALL FOR ONLY **£8.7.6**



(plus 7/6 carr. & ins.). The Amplifier consists of a 2 Stage design incorporating the 3 modern BVA valves and has separate BASS and TREBLE CONTROLS. The Portable Case will also accommodate almost any make of Autochanger and is attractively finished in Grey colour Rexine—WE ALSO SUPPLY SEPARATELY:—

(a) The 2-Stage (plus Rectifier) **AMPLIFIER**	£4	2 6
(b) The **PORTABLE CARRYING CASE**	£3	17 6
(c) 6½in. **P.M. SPEAKER**		18 9

(Carriage and insurance 4/- extra.)

WE ALSO SUPPLY SEPARATELY—

(a) The 2-Stage (plus Rectifier) **AMPLIFIER**	£4	2 6
(b) The **PORTABLE CARRYING CASE**	£3	17 6
(c) **P.M. SPEAKER**		18 9

(Carriage and insurance 4/- extra.)

We also have a smaller **PORTABLE CASE** Ideal for Record Players. PRICE ONLY **£3/3/-** (plus carriage and ins.)

Open Monday to Friday 9 a.m.—6 p.m.
Saturdays 9 a.m.—1 p.m.

STERN RADIO LTD.

THE 1958 NEW LOOK

MULLARD DESIGNS FOR THE HOME CONSTRUCTOR

AMPLIFIERS PRE-AMPLIFIERS

COMPLETE KITS OF PARTS FOR THE "HI-FI" ENTHUSIAST

Designed by MULLARD—Presented by US strictly to their specification

THE VERY POPULAR MULLARD "5-10" MAIN AMPLIFIER

Undoubtedly the most successful amplifier yet designed, and used in conjunction with the new Mullard Pre-Amplifier, an undistorted power output of up to 10 watts is obtained. Thoroughly recommended to the "Hi-Fi" enthusiast who contemplates a very high quality home installation. In addition the versatility of the equipment makes it quite suitable for use in small halls, etc. We supply complete to MULLARD'S SPECIFICATION with specified valves and components and including the latest PARMEKO Ultra linear Output transformer and the Parmeko mains transformer which has power available to drive Radio Tuning Unit.

Price for COMPLETE KIT OF PARTS..... **£10.0.0**

Alternatively we supply ASSEMBLED and TESTED..... **£11.10.0**

(Carriage and Insurance 5/- extra).

We also offer this "5-10" incorporating the latest **PARTRIDGE ULTRA-LINEAR OUTPUT TRANSFORMER** for **£1/6/-** extra.

MULLARD'S NEW 2-STAGE PRE-AMPLIFIER-TONE CONTROL UNIT



A completely new design employing two EF86 valves, and in particular designed to operate with the Mullard range of Power Amplifiers, but also perfectly suitable for other makes.

Briefly it incorporates:—

- Equalisation for the latest R.I.A.A. characteristics.
- Input for variable reluctance. Magnetic Pick-ups.
- Input for Crystal Pick-ups.
- Input for Tape replay.
  - (a) Direct from High Impedance Tape Head.
  - (b) From a Tape Amplifier or Pre-Amplifier.
- Sensitive Microphone Channel.
- Wide range BASS and TREBLE Controls
- Attractive Perspex front control panel.
- Our Kit is strictly to MULLARD'S SPECIFICATION.

Price, COMPLETE KIT OF PARTS..... **£6.6.0**

Alternatively we supply ASSEMBLED and TESTED..... **£8.0.0**

(Carriage and Insurance 5/- extra.)

Only NEW HIGH GRADE Components and Mullard Valves are supplied with these kits—we DO NOT use "Surplus or Cheap" components.

Please enclose S.A.E. if ILLUSTRATED and DESCRIPTIVE LEAFLETS are required . . . alternatively the COMPLETE ASSEMBLY MANUALS containing component Price Lists and practical Drawings etc. are available at 1/6 each.

THE NEW MULLARD "3-3" MAIN AMPLIFIER



Based entirely on the present very popular "3-3" model and designed to operate in conjunction with the new 2-stage PRE-AMPLIFIER (shown here) thus providing all the facilities associated with the more expensive "Hi-Fi" equipments. We recommend it as the IDEAL SMALL HOME INSTALLATION where very high quality is desired at the lower volume level (up to 3 watts).

We supply completely to MULLARD'S SPECIFICATION INCLUDING the latest PARMEKO Output Transformer specified Valves and Components. Has Power available to drive a Radio Tuning Unit.

Price for COMPLETE KIT of PARTS..... **£7.0.0**

Alternatively we supply ASSEMBLED and TESTED..... **£8.0.0**

(Carriage and Insurance 5/- extra.)

SPECIAL PRICE REDUCTIONS—WE OFFER

(a) THE COMPLETE KIT of PARTS to build both the "5-10" MAIN AMPLIFIER and the 2-stage PRE-AMPLIFIER-CONTROL UNIT..... **£12.10.0**

both ASSEMBLED and TESTED..... **£15.0.0**

CREDIT TERMS: DEPOSIT **£3/15/-** and 9 monthly payments of **£1/7/6.**

H.P. TERMS: DEP. **£7/10/-** & 9 monthly payments of **10/-.**

(b) THE "5-10" and the 2-STAGE PRE-AMPLIFIER both ASSEMBLED and TESTED **£18.18.0**

CREDIT TERMS: DEPOSIT **£4/15/-** and 9 monthly payments of **£1/14/7.**

H.P. TERMS: DEP. **£9/9/-** & 12 monthly payments of **17/6.**

*ALL PRICES QUOTED FOR THE "5-10" ARE SUBJECT TO £1/6/- EXTRA IF THE PARTRIDGE TRANSF. IS REQUIRED.

(a) THE "3-3" and the 2-STAGE PRE-AMPLIFIER



THE NEW COMPLETE MULLARD "3-3"

A VERY HIGH QUALITY 3 WATT AMPLIFIER PROVIDING EXCELLENT REPRODUCTION AND HAVING AN ATTRACTIVE ENGRAVED PERSPEX FRONT PANEL.

Price for COMPLETE KIT OF PARTS.... **£7.10.0**
(plus 6/6 carriage and insurance.)

Alternatively supplied ASSEMBLED and FULLY TESTED..... **£8.19.6**
(plus 6/6 carriage and insurance.)

The complete specification is available for 1/6.

Developed from the very popular 3-valve 3-watt Amplifier designed in the Mullard Laboratories. Our kit is complete to the Mullard specification, including supply of specified components, valves and PARMEKO OUTPUT TRANSFORMER. We also include switched inputs for 78 and L.P. records plus a Radio position. Extra power to drive a Radio Tuning Unit is also available.

When ordering please include an extra 7/6 to cover the cost of carriage and insurance

THE NEW COMPLETE MULLARD "5-10" AMPLIFIER



We offer this popular and very successful design COMPLETE to MULLARD'S SPECIFICATION, but incorporating some improvements in the general layout. HIGH QUALITY REPRODUCTION up to a maximum of 10 watts output. The CONTROL UNIT is separate and completely enclosed; it is normally fitted to the Main Amplifier Chassis as shown in the illustration but, if it is desired to use the unit remote from the Main Chassis, it can be quite easily detached and used up to 2 yards distance. We incorporate SPECIFIED COMPONENTS and NEW MULLARD VALVES. We also give the purchaser the choice of two of the best ULTRA-LINEAR OUTPUT TRANSFORMERS made—first the latest by PARMEKO LTD., and also the latest by PARTRIDGE (**£1/6/-** extra) which is generally recognised as the best U/L Output Transformer made today and ensures maximum undistorted output and the widest frequency range. We also supply the PARMEKO MAINS TRANSFORMER, and this has extra power available to supply a Radio Tuning Unit amounting to 200 volts at m/a and a separate heater winding giving 6.3 volts 2½ amps.

Price COMPLETE KIT OF PARTS (PARMEKO TRANSFORMER) **£11.10.0**

Alternatively we supply ASSEMBLED and TESTED..... **£13.10.0**

Credit Sale: Dep. **£3/7/6** and 9 monthly payments of **£1/4/11.** H.P. Terms: Dep. **£6/15/-** and 8 monthly payments of **19/3.**

Send S.A.E. for ILLUSTRATED LEAFLET or **1/6** for the COMPLETE ASSEMBLY MANUAL.

HOME CONSTRUCTORS



BUILD YOUR OWN "Hi-Fi" LOUDSPEAKER SYSTEM

WITH W-B's WELL-KNOWN RANGE OF READY-TO-ASSEMBLE CABINETS. ALL ARE BEAUTIFULLY MADE AND FINISHED AND VERY EASILY ASSEMBLED. ONLY A SCREWDRIVER IS REQUIRED, THEY ARE PACKED FLAT IN CARTONS AND COMPLETE WITH SCREWS.

Send S.A.E. for Illustrated leaflet—it contains a selection of 10 CABINETS including models to accommodate Amplifiers, Pre-amplifiers, Tuning Unit, Record Player, etc. Prices from **£5/10/-.** THE W.B. STENTORIAN "Hi-Fi" P.M. Speakers are also in Stock.

A COMPLETE KIT OF PARTS, STERN'S 8-10 WATT AMPLIFIER

Has power supply available for Radio Tuning Unit.

Price of COMPLETE KIT OF PARTS (plus 5/- carr. & ins.) **£7.10.0**

WE ALSO OFFER IT ASSEMBLED and READY FOR USE for **£9.10.0**
(plus 5/- carr. & ins.).

This amplifier has proved one of the most popular models yet offered to the HOME CONSTRUCTOR. It provides really excellent reproduction up to 8 watts, employing 6V6's in push-pull and incorporating negative feedback. Provides for the use of both 3 and 15 ohm Speakers. The complete SPECIFICATIONS and BUILDING INSTRUCTIONS ARE AVAILABLE for **1/6.**

A Selection of RADIOGRAM CHASSIS enabling "MODERNISATION" of that OLD RADIOGRAM



ALL ARE THE LATEST AM/FM DESIGN

- The Dulci Model H.3 **£20/17/-**
- The Dulci Model H.4 **£24/6/6.**
- The Dulci Model H4/PP **£29/3/10.**
- The ARMSTRONG PB.403 **£29/8/-.**
- The ARMSTRONG AF105 **£37.**

We also have the latest FM or combined AM/FM RADIO TUNING UNITS.

- THE Dulci FM Tuner incorporating Power Supply **£17/10/3.**
- The Dulci AM/FM Tuning Unit having own Power Supply incorporated **£20/17/-.**
- The TSL FM Tuner incorporating Power Supply **£18/18/-.**

The Above are just a few examples—we have others—Send S.A.E. for full data on any chassis.

Credit Sale and H.P. Terms are available.

"FRUSTRATED EXPORT ORDER"

The Cossor Model 527/X4 Valve "All-dry" Battery Portable.

Offered For **£6.15.0**

Plus 5/- carr. & ins.

Consists of a 4 valve Superhet Receiver covering Medium Waveband 197-575 metres, and two Short Wavebands 13.6 to 136 metres. The new low consumption valves are incorporated and the whole is accommodated in an attractive robustly made case. Battery required is 90 volts and 1.4 volts (price **19/6**) and is external to case.

Please enclose S.A.E. with all enquiries

109-115 FLEET ST. LONDON E.C.4

Phone: FLEet Street 5812-3-4.

G.W. SMITH & CO (RADIO) LIMITED

Phone: GERRARD 8204/9155
Cables: SMITHEX LESQUARE
3-34 LISLE STREET, LONDON, W.C.2

UNIVERSAL AVOMETER MODEL "D"

10 D.C. volt ranges, 150 Mv. to 1.5 kv. 8 A.C. volt ranges 7.5 v. to 1.5 kv. 8 D.C. current ranges, 15 ma. to 30 amps. 6 A.C. current ranges, 75 ma. to 15 amp. Resistance ranges, 1K and 10 K. ohms. Supplied in perfect order with instructions and leads. **£8/19/6** each. P/P. 4/-.

ADVANCE CONSTANT VOLTAGE TRANSFORMERS. Input 190 to 260 volts. A.C. 50 cycles. Output constant at 230 volts. Max. rating 150 watts. Supplied brand new in original crates. **£8/10/-** each. P/P 5/-.

TRIPLETT 100 MICROAMP 4in. METERS. Square face, flush fitting. Scaled volts, ohms ma Ideal for test meter. Brand new **79/6** each. P/P. 1/6.

HEAVY DUTY AUTO TRANSFORMERS. 110/230 volts, 750 watts. Brand new, only **69/6** each. P/P. 5/-. Also 100 watts, **15/6**, 150 watts **21/-**. P/P. 1/6.

POST OFFICE TELEPHONE HANDSETS. Standard type, brand new, boxed, **12/6** each. P/P 1/3.

TAYLOR 6in. 50 MICROAMP METERS. Square face, flush fitting. Brand new, boxed, **£5/19/6** each P/P. 1/6.

2 VOLT 3 A.H. ACCUMULATORS. Exide, new, unfilled, **2/-** each. P/P. 1/-. Block of 12 **21/-**. P/P. 4/6.

JOHNSON TX. CONDENSERS. 500 PF variables. Brand new, boxed, **15/6** each. P/P. 1/-. New, boxed, Johnson variable inductances, **22/6**. P/P. 2/6.

AMERICAN SUPER LIGHTWEIGHT HEADPHONES. Res. 50 ohms Fitted with rubber earmoulds to fit inside the ear, extremely good quality, ideal for communication receivers, etc. New and boxed. **15/-** pair. P/P. 1/-.

FERRANTI POTTED FILAMENT TRANSFORMERS. Hermetically sealed, ceramic terminations. All new and boxed. Type 1,200/250 v. input. Output 6.3 v. CT. 5.6 a., tapped 5 v. 6.3 v. CT 4.8 a. tapped 4 v. 6.3 v. CT. 1 a. tapped 4 v., **19/6** each. Type 2. Input 200/250 v. Outputs, 6.3 v. CT. 3.3 a. tapped 5 v. 6.3 v. CT. 1 a. tapped 4 v. 6.3 v. CT. .9 a. 6.3 v. CT. .6 a., **15/6** each. P/P. 2/- each type.

L.T. TRANSFORMER BARGAINS. Type 1. 200/250-volt input. Output tapped 3, 6, 9, 12, 24 or 36 volts 5 amps. **35/-** each. P/P. 3/-. Type 2. 200/250 volt input. Output 12 volts 5 amps. **12/6** each. P/P. 2/-.

AR.88 WAVECHANGE SWITCHES. Spare for Model D. Ceramic 8 bank, 6 pos., complete with all screens. Brand new. **17/6** each. P/P. 2/6.

AVO MINOR LEATHER CASES. Brand new. **7/6** each. P/P. 1/-.

AMERICAN MULTI-RANGE TEST METERS



1,000 ohms per volt. 400 micro-amp basis movement. Ranges volts. A.C. or D.C. 2.5, 10, 50, 250, 1,000 and 5,000 v. D.C. current 1 ma. 10 ma., 100 ma. and 1 amp. Ohms 500, 100 k. and 1 meg. Decibels, −10 to +69. Complete with test prods and instructions. As new, tested before despatch. **£5/19/6** each. P/P. 3/-.

AVO BATTERY ELIMINATOR POWER PACKS. Operation 200/250 volts A.C. Output 1.4 volts at 300 ma. and 67 volts at 10 ma. Stabilised by VS70, whole unit fully fused. Size 8½ × 5 × 3¼in. Ideal for personal battery sets, etc., supplied brand new in maker's cartons, **39/6** each. P/P. 2/6.

TAYLOR MODEL 160A OUTPUT METER. Incorporates 4in. meter calibrated 0–25 mW. Meter multiplier, .01-.10-1.0-10-100. Impedance matching 2.5-5-100-125-150-600-4,000-8,000-10,000-20,000 ohms. Supplied brand new, boxed and tested, **£14/10/-** each P/P. 5/-.

COSSOR DOUBLE BEAM OSCILLOSCOPE TYPE 339



Operation 110/200/250 volts A.C. 120 watts. Time Base 10 positions. 6 cps. to 250,000 cps. Amplifier 10 cps. to 2,000,000 cps. Sensitivity, Y1.Y2 3.1 v. D.C. 1.1 v. rms. X. 2.25 v. D.C. .8 v. rms.

Supplied in good working order, complete with handbook and circuit. **£27/10/-** each. P/P. £1.

I.F. ALIGNMENT OSCILLATORS A laboratory instrument, sub-standard accuracy, three ranges 455, 465 and 475 kc/s., with dial readings of ± 10 kc/s. on each range. 465 kc/s. crystal check. 30% internal modulation at 150 or 400 cycles. Variable attenuation from .1 microvolt to 1 volt. 1 DB to 100 DB. 200–250 volts A.C. operation, supplied brand new, boxed, **£15** each. P/P. 10/-.

W.1191 WAVEMETERS

Portable precision battery operated frequency check meters, coverage 100 kc/s. to 20 mc/s. Supplied complete with all valves and 1 mc/s. Xtal and calibration charts. **£5/19/6** each. P/P. 6/-.

RCA ET.4336 PLATE TRANSFORMERS. Special release, brand new in original maker's transit cases. Primary tapped 200 to 250 volts 50 cycles. Secondary 2,000/0/2,000 volts 400 ma., tapped 1,500/0/1,500 volts Price **£12/10/-** each. P/P. £1.

A.C. MAINS VOLTAGE REGULATOR TRANSFORMERS. Input 230 volts. Output variable from 185 to 250 volts at a max. rating of 24 amps. Ideal for laboratory use, etc., supplied as new. **£15** each. P/P. 10/-.

MUIRHEAD PRECISION STUD SWITCHES. Brand new and boxed. 4 banks, each bank 24 position. Heavy duty contacts. Only **17/6** each. P/P. 1/6.

EDDYSTONE MAINS POWER PACKS S.441B. Supplied brand new and unused. Input 200/250 volts. Output 300 volts 200 ma. and 12 volts 3 amps. Double choke and condenser smoothed, 5U4 rectifier. Housed in grey metal case, fully fused, indicator, etc Only **49/6** each. P/P. 6/-.

ALKALINE NIFE ACCUMULATORS

Size: 26½" × 8½" × 5½"

Banks of 10 cells giving 12 volts 45 A.H. Unused in wooden crates, **£5/10/-** each. P/P. 7/6.

"C" CORE TRANSFORMERS Special offer, all brand new and boxed. All types have 230 volts 50 cycle input. Type 1. 510/0/510 v. 300 ma., 375/0/375 v. 100 ma., 6.3 v. 9 a., 2 × 6.3 v. 2 a., 2 × 6.3 v. 1 a., 6.3 v. 1.5 a. 6.3 v. .5 a., 5 v. 3 a., **82/6**. P/P. 5/-. Type 2. 450/0/450 v. 250 ma. 2 × 6.3 v. 5 a., 2× 6.3 v. 1 a., 5 v. 4 a., **65/-**. P/P 4/6. Type 3. 450/0/450 v. 220 ma., 6.3 v. 6 a., 6.3 v. 3 a., 5 v. 3 a., **59/6**. P/P. 4/-. Type 4. 350/0/350 v. 400 ma., 25 v. 1 a., 21 v. .5 a., 6.3 v., 5 a., 6.3 v 1 a. 5 v. 4 a., **65/-**. P/P. 4/6. Type 5. 360/0/360 v. 200 ma., 360/0/360 v. 65 ma., 6.3 v. CT. 5 a., 6.3 v. CT. 2 a., 6.3 v. 5 a., 5 v. 4 a. 5 v. 3 a., **65/-**. P/P 4/6

"C" CORE CHOKES. 20H, 80 ma., 16H. 120 ma., 10H 250 ma., 100H 30 ma. All types **10/6** each. P/P. 2/-.

6-VOLT VIBRATOR POWER PACKS. Output 120 volts 30 ma. Fully smoothed, uses standard 4-pin Mallory vibrator. New and boxed **12/6** each. P/P. 2/6.

"C" CORE E.H.T. TRANSFORMERS. Type 1, 3,850 v. 5 ma., 4 v. 2.5 a., 4 v. 1 a., 52/6. P/P. 3/-. Type 7. 1,250/0/1,250 v. 5.5 ma., 6.3 v. 1 a., 6.3 v. 1 a., 4 v. 1 a., **42/6**. P/P. 2/6.

AMERICAN ROTARY TRANSFORMERS. Models available for either 6 or 12 volt D.C. Input. Output 250 volts 80 ma. Ideal for car radios or razors, etc., new and unused, **22/6** each. P/P. 3/-.

NATIONAL R.F. CHOKES. Tx. type, ceramic former, new boxed, **4/6**. P/P. 9d.

AMERICAN GEARED MOTORS. American 24 volt D.C. motor with built-in precision gearbox giving twin outputs 20 r.p.m. and 6 r.p.m Will also operate on 12 v. giving reduced outputs. Size 7 × 1¾in. Shaft dia. ¼in. Supplied brand new only. P/P. 3/-. **19/6** each.

MARCONI TF-643 SUB-STANDARD WAVEMETERS. Frequency coverage 20 to 300 mc/s. in 4 bands. Supplied as new with all coils and calibration charts. **£19/10/-** each. P/P. 6/-.

R.1155 SUPER SLOW MOTION DRIVES. Improved version as fitted to Models L and N. Suitable for Model A, etc. Brand new **12/6** each. P/P. 1/-.

MIDGET KNIFE ACCUMULATORS. Single cells 1.2 v. 3 A.H. New 5/- each. P/P. 1/-.

SYNCHRONOUS MAINS MOTORS. 200/250 v. A.C, Output 1 R.P.M. fitted with microswitch and cam. **32/6** each. P/P. 2/-

AVO MODEL 7 MULTIPLIERS. Extends 1,000-volt range to 4,000 volts. New, boxed, **5/6** each. P/P. 1/-.

MUIRHEAD VERNIER DRIVES. Brand new, **7/6** each. P/P. 1/-.

EVERSHED AND VIGNOLES WEE-MEGGER 500 VOLTS.



Special release, brand new and unused, complete with leather carrying case, only **£12/10/-** each. P/P. 2/6. Also available secondhand models, but perfect working order complete with leather case, **£8/10/-** each. P/P. 2/6.

G.E.C. SELECTEST MULTI-RANGE METERS. Basic movement 1 ma. 1,000 ohms per volt. Resistance ranges, 0 to 1 megohm. D.C. volts from .15 v. to 1.5 kv. A.C. volts from 7.5 v. to 1.5 kv. A.C. current from 75 ma. to 15 amps. D.C. current from 1.5 ma. to 30 amp. Incorporates safety cut-out. Supplied in perfect working order, complete with leads. **£9/19/6** each. P/P. 3/6.

CRYSTAL MICROPHONE INSERTS. Sensitive, ideal for amplifiers, tape recorders, etc., 4/6 each. P/P. 6d.

12 - VOLT MIDGET ROTARY TRANSFORMERS. Type H.T.11, size 4½ × 2¾in. Output 310/360 volts 30 ma. New and boxed **22/6.** P/P. 1/6.

EX NAVY SOUND-POWERED TELEPHONES. This type requires no batteries to operate and can be fitted in moments to give complete inter-communication between two points. Hand generator calling. Only 45/- each. P/P. 4/6.

MINIATURE H.T. TRANSFORMERS. Input 220/240 v. Output type 1. 220 v. 25 ma. 6.3 v. 1 a. 10/6. P/P. 1/-. Type 2. 220 v. 45 ma. 6.3 v. 1.5 a. 11/6. P/P. 1/3. Midget contact rectifiers, 250 v. 50 ma. **7/6.** P/P. 6d.

METER BARGAINS

50 microamps, 2½in. P.M.C.	49/6
500/0/500 microamp, 3½in. F.M.M.C.	49/6
500/0/500 microamp, 2½in. P.M.C.	19/6
50/0/50 microamp, 2½in. F.M.M.C.	69/6
50 microamp, 2½in. F.M.M.C.	59/6
30 ma., 2½in. F.M.M.C.	9/6
1 ma., 2½in. F.M.M.C.	25/-
200 ma., 2½in. F.M.M.C.	9/6
1 amp. 2½in. F.M.M.C.	10/6
1.5 amp., 2in. F.M.M.I.	6/6
7.5 amps. 3½in. P.M.I.	10/6
300 volt A.C., 2½in. F.M.M.I.	25/-
5/0/5 ma. 2in. F.M.M.C.	12/6
300 ma. 2½in. F.M.M.C.	9/6
15 volt 1½in. F.M.M.C.	10/6
20 volt 2in. F.M.M.C.	8/6
120 volt 3½in. F.M.M.C.	32/6
500 volt AC/DC 2½in. F.M.M.I.	25/-

AMERICAN No. 19 Mk. II TRANSMITTER RECEIVERS. Brand new, complete with all valves, only 65/- each. P/P 10/-.

VARIAC TRANSFORMERS. Input 230 volts, Output variable from 0/250 volts, 9 amps. £12/10/- each, P/P. 5/-.

WESTON MODEL 722 TESTMETER



An ideal bench or portable instrument. Incorporates 5 A.C. or D.C. volt ranges, 2.5 v. to 1,000 volts, 6 D.C. current ranges 100 microamps. to 500 ma. A.C. current, 500 ma., 1 amp., 5 amps. Resistance, 100 ohms 1 K., 100 K. and 10 megohm. Supplied thoroughly tested in rexine covered carrying case with instructions and leads. **£10/10/-** each. P/P. 4/-.

EDDYSTONE MAINS POWER PACKS

Supplied brand new and unused. Mains input 200/250 volts. Output 175 volts 60 ma. and 12 v. 2.5 a. Double choke and condenser smoothed. 5Z4 rectifier. Housed in grey metal case. Only **32/6** each. P/P. 3/6.

CR.100 SPARES KIT

Complete set of new valves 2 X66, 2 U50, 2 DH63, 2 KT63, 6 KTW61. Also set of resistors, condensers, pots toggle switch and output transformer. Supplied new and boxed **59/6** each. P/P. 4/6.

PORTABLE PRECISION VOLTMETERS

Brand new and boxed instruments by famous manufacturer. Housed in polished teak case. Moving iron movement reading A.C. or D.C. volts on 2 ranges. 0-160 v. and 0-320 v. 8in. mirror scale. Accuracy within 2%. Supplied at a fraction of original case. Only **£5/19/6** each. P/P. 3/6.

R.1155 COMMUNICATION RECEIVERS MODEL "N"

Incorporating the trawler band. Frequency coverage: 200-250 kc/s., 600-1,500 kc/s. 1.5-3 mc/s 3-7.5 mc/s. and 7.5-18 mc/s. Supplied in perfect working order, aerial tested, with illustrated leaflet, **£12/19/6** each. P/P. 7/6. Standard models available but fitted with improved dial drive as above model, **£8/19/6** each. Combined A.C. mains power packs and output stage available. **85/-** each. P/P. 3/6.

SPECIAL OFFER

OF MARCONI SIGNAL GENERATORS TF-517. Frequency coverage 10 to 18 mc/s. and 33 to 58 and 150 to 300 mc/s. Operation 200/250 volts A.C. Supplied in good condition at the ridiculous price of **£12/10/-** each. P/P £1.

PARMEKO TABLE TOP TRANSFORMERS. Input 230 v. 50 cycles. Output 620/550/375/0/375/550/620 volts 250 ma. Also 2-5 volt 3 amp. windings. Size: 6¾ × 6½ × 5¼in. Brand new only 45/- each. P/P. 5/-.

SPECIAL OFFER

NO. 19 SETS MKII

Complete with all valves new condition, only 65/- each. P/P. 10/-

300ft. COPPER AERIAL WIRE. Ex U.S.A. Brand new. 3/6 reel. P/P. 1/-.

HEAVY DUTY SLIDER RESISTANCES 1 ohm 12 amp. **6/6** each. P/P. 1/-.

AMERICAN TRIPLETT MULTI-RANGE TESTMETERS. 1,000 ohms per volt. Incorporates the following ranges. Volts A.C. 10 to 5 kv. Volts D.C. 10 to 5 kv. Current D.C. 10 ma. to 500 ma. and 2 resistance ranges, 300 ohms and 250 K. ohms. Supplied in working order with leads. **£4/17/6** each. P/P. 2/6.

HEAVY DUTY MAINS ISOLATING TRANSFORMERS. Specifications: Primary 230 volts 3 amps. Secondary 230 volts 3 amps (service rating, OK 5 amps.). Ideal for laboratory or workshop use. Supplied brand new in original transit cases. **£6/10/-** each. P/P. 10/-.

RCA. OUTPUT TRANSFORMERS. Completely potted. Centre-tapped primary, 8,000 ohms. Secondary tapped 3, 7.5, 15 or 600 ohms. Separate feedback winding. 15 watts rating. Suitable for 6L6, EL84, etc., unused, **27/6** each. P/P. 2/-.

EVERSHED AND VIGNOLES MEGGER OHMMETERS

Ideal for all polarity and continuity tests. Supplied brand new with all leads and instructions, only **59/6** each. P/P. 2/-.

CHARGING AND MODEL TRANSFORMERS

1. Pri 200/250 v Sec. 3.5, 9 or 17 v. 1 amp., **9/9**
2. Pri. 200/250 v. sec. 3.5, 9 or 17 v. 2 amp., **14/3**
3. Pri. 200/250 v. Sec. 3.5, 9 or 17 v. 4 amp., **16/6**

Postage 1/6 all types.

L.T. METAL RECTIFIERS. Full wave and bridged. 12 v. 1 amp., **6/3**; 12 v. 2 amp., **9/3**; 12 v. 4 amp., **13/9**., 24 v. 1 amp., **12/6**; 24 v. 4 amp., **22/6**; 36 v. 4 amp., **27/6**. P/P. 1/- all types.

MARCONI TF.144G. STANDARD SIGNAL GENERATORS. 85 kc/s. to 25 mc/s. Reconditioned as new, £65 each. P/P. £1. Marconi TF-853-854 10 cm. signal generator brand new, **£100.** P/P. £2. TF-390 G., from **£12/10/-.**

AMERICAN AUTO TRANSFORMERS. 110/230 volts, 40 watts. Small size, fully shrouded. Ideal for instruments, shavers, etc. Brand new, boxed, **12/6** each. P/P. 1/9.

INSTRUMENT POTENTIOMETERS. 3½in. dia. 10W. rating 5K, 25K, 50K or 100K ohms. New, boxed, **10/6** each. P/P 1/-.

BARGAIN GRAM. MOTORS. Garrard centre-drive motors complete with turntables 200/250 volts A.C. Adjustable mechanically from 0 to 45 r.p.m. Only **22/6** each. P/P. 3/-.

SMOOTHING CHOKE BARGAINS. 10H, 60 ma., **4/6**; 15H, 60 ma., **5/6**; 8H, 100 ma., **8/6**; 9H, 100 ma., **7/6**; 10H, 100 ma., **8/6**; 5H, 200 ma., **5/6**; 20H, 120 ma., **10/6**; 50H, 120 ma., **15/6**; swinging choke 3.6-4.2 H, 250 ma., **10/6.** 3H, 100 ma., **6/6** ; 20H, 50 ma., **7/6.** P/P. 1/- to 2/6.

DYNAMO EXPLODER UNITS. Used for detonating explosive charges. Operation is by hand generator, giving 1,800 volts across output terminals. Ideal also as photo flash. Brand new, only **29/6** each. P/P. 3/-.

MIDGET RECORDER MOTORS. Size 1½ × 1 × 2¾in. Operates from 4.5 to 24 v. D.C. Fitted with reduction gear. New and boxed. **12/6** each. P/P. 1/-.

PARMEKO TRANSFORMERS. Input 230 volts. Output 350/0/350 volts 150 ma. 6.3 v. 4 a. 5 v. 4 a. Brand new, **32/6.** P/P. 3/6. Also 350/310/0/310/350 volts 220 ma. 6.3 v. 5 a., 2 × 6.3 v. 3 a., 2 × 6.3 v. 1 a., 5 v. 3a., potted, **49/6.** P/P. 3/6.

POST OFFICE JUMPER LEADS. Fitted with 2 standard jack plugs, brand new 3/-. P/P. 6d. Panel jacks to fit 9d.

LEACH AERIAL CHANGE-OVER RELAYS

12 v. Double Pole, Ceramic Insulation, New and Boxed, **7/6** each. P/P. 9d.

UNIVERSAL AVOMINOR TEST-METERS.

Small, compact, accurate instrument. Resistance measurements from 0 to 20 k. ohms, D.C. volts from 0 to 500 v. A.C. volts from 0 to 500 v. D.C. current from 0 to 500 ma. Supplied in perfect working order, complete with leather case and leads. **£5/10/-** each. P/P. 2/6.

G.W. SMITH & CO (RADIO) LIMITED
Phone: GERRARD 8204/9155
Cables: SMITHEX LESQUARE
3-34 LISLE STREET, LONDON, W.C.2

COMMUNICATIONS RECEIVER R.107

Just purchased from the Ministry of Supply, this magnificent 9 valve 3 Waveband receiver gives world wide reception over a coverage of 1.2-17.0 Mc/s. (18-250 metres), taking in several important Amateur Bands, Shipping Band and part of the Medium waveband, including the B.B.C. Light Programme. The sensitivity is 1 micro-volt on C.W. and 2-6 micro-volts on R.T. The controls include a Bandwidth Switch (" Wide " or " Narrow "), choice of AVC and BFO, Audio Filter, RF Gain, Aerial Trimmer. Has built-in Output Stage with Internal Speaker, which can be switched out to use Headphones. Uses normal International Octal Valves. Incorporates A.C. Mains Power Unit for 100-250 volts and Vibrator Pack for 12 volts D.C. In grey metal case size 24×13×17in. These sets are used, but in first-class condition, thoroughly checked and aerial tested before despatch. Complete, ready to switch on. ONLY £8/19/6 (carriage 20/- England and Wales, rest of U.K. extra). S.A.E. for leaflet.

COMMUNICATIONS RECEIVER R.1155. The famous Bomber Command Set Covers 18.5-7.5 Mc/s. 7.5-3.0 Mc/s. 1,500-600 Kc/s. 500-200 Kc/s. 200-75 Kc/s. Late Model " B " fitted with Super Slow Motion Tuning. Slightly used, but in First-class Condition, aerial tested before despatch. 14-page booklet supplied giving circuits and notes, etc. (or available separately 1/3). ONLY £7/19/6 (carriage 10/6).

A.C. MAINS POWER PACK & OUTPUT STAGE. In black metal case. Enables receiver to be operated immediately by just plugging in. WITH built-in speaker, £5/5/-. LESS speaker, £4/10/- (carriage 5/-).

TCS TRANSMITTERS

The renowned American TCS Model designed by the Collins Company for static or mobile use. Covers 1.5-12.0 Mc/s. in 3 bands and is complete with 7 valves, employing 2 of 1625 in P.A. Stage, 1 each of 1625 in Buffer and Modulator Stages, and 3 of 12A6 in Oscillator Stage. Provision for VFO or Crystal Control. 4 Crystal positions. Radio Telephone or Radio Telegraph.- Has Plate and Aerial Current Meters. Power requirements 12 v. L.T. and 400 v. H.T. In black crackle case, size 11×13×11in., condition BRAND NEW and UNUSED ONLY £12/10/- (carriage, etc., 15/-). The double Dynamotor Power Unit, Type 21881B for 12-volt operation, delivering 400 v. for Transmitter and 225 v. for Receiver is available at £12/10/- (carriage, etc., 15/-).

MARCONI SIGNAL GENERATOR TF-517-F/1. Special offer of these Laboratory Signal Generators. Cover 10-18 Mc/s., 33-58 Mc/s. and 150-300 Mc/s. In good used condition, with charts. Checked before despatch. Complete with power pack for normal A.C mains. ONLY £12/10/- (carriage, etc., 20/-).

MARCONI SIGNAL GENERATOR TF144G. Frequency coverage 85 kc/s. to 25 Mc/s., and known as a Laboratory Standard. For normal A.C. mains and complete with all leads. Reconditioned AS NEW ONLY £65.

EHT TRANSFORMERS. 5.5 kV. (Rect.) with 2 v. 1 a., 79/6. 7 kV (Rect.) with 2 v. 1 a., 89/6. 2.5 kV. (Rect.) with 2-0-2 v. 1.1 a., 2-0-2 v 2 a. (for VCR 97 tube, etc.), 42/6 (postage 2/- per trans.).

ROLA 6½in. P.M. SPEAKER. Mounted in grey crackled metal cabinet. 9×9×4½in. and with volume control. BRAND NEW AND UNUSED. ONLY 27/6.

1 MA METERS. 2½in. circular, rim fixing, 2½in. barrel, 50 divisions, scale marked 2-.4 etc. BRAND NEW IN MAKERS' CARTONS. ONLY 25/-.

6 v. VIBRATOR PACKS. Output approx. 130 v. at 30 mA., fully filtered and smoothed. Complete. ONLY 12/6.

R1155 SUPER SLOW-MOTION TUNING ASSEMBLY. As used on all late model 1155s. Easily fitted to " A " sets, etc. ONLY 12/6.

POCKET VOLTMETERS. Not ex-Govt. Read 0-15 v. and 0-300 v A.C. or D.C. BRAND NEW and UNUSED. ONLY 18/6.

SPECIAL MAINS TRANSFORMER OFFER. Normal 230 v. A.C. Primary. Secondaries 330-0-330 v. 100 mA. 4 v. 3 amps. Ex-W.D. BRAND NEW AND UNUSED. ONLY 15/- (postage etc., 2/6).

12-WAY SCREENED CABLE. In 10ft. lengths, fitted with plugs, originally made for use with the 19 Set. UNUSED. ONLY 17/6 per lead.

CRYSTALS. British Standard 2-pin 500 kc/s., 15/-. Miniature 200 kc/s. and 465 kc/s. 10/- each.

Cash with order please, and print name and address clearly.

PLEASE ADD POSTAGE OR CARRIAGE COSTS ON ALL ITEMS

HARRIS ELECTRONICS
(LONDON) LTD.

RADIO CORNER, 138 GRAY'S INN ROAD, LONDON, W.C.1

Phone: TERMINUS 7937

Open until 1 p.m. Saturdays. We are 2 mins from High Holborn (Chancery Lane Station) and 5 mins. by bus from King's Cross.

EDDY'S (NOTTM.) LTD.
DEPT. W.W.
172 ALFRETON ROAD, NOTTINGHAM

MIDGET BATTERY ELIMINATORS. To convert all types Battery Portables (please state make and model No.) to mains operation. Smaller than H.T. Battery alone, 57/6, post etc. 2/6 extra.

AZ1	12/11	EF89	9/11	TDD4	12/6	6J7M	9/6
AZ31	12/11	EF91	6/11	U24	19/11	6F1	13/11
B36	19/11	EL41	9/11	U25	13/6	6F6M	9/6
CY31	12/11	EL42	10/-	U35	17/6	6F13	13/11
DAF96	9/6	EL84	9/-	UU8	18/6	6F15	13/11
DF96	9/6	EY51	12/11	U801	21/-	6J5G	2/11
DK92	9/6	EY86	15/-	UBC41	8/6	6K7M	7/6
DK96	9/6	EZ80	8/3	UBF80	9/6	6K7G	2/11
DL96	9/6	EZ81	9/6	UCH42	8/11	6K8G	7/11
EABC80	8/6	GZ32	12/6	UCL82	13/6	6L6G	5/11
EB91	6/6	HY90	7/6	UF41	8/-	6P28	17/6
EBF80	9/6	KT33C	8/6	UF42	14/6	6Q7G	8/11
EBC41	9/6	L63	6/6	UL41	9/6	6SN7GT	5/11
ECC81	8/11	MU14	8/6	UL84	8/11	6U4GT	13/11
ECC82	8/11	OZ4	6/6	UY41	8/6	6V6G	5/11
ECC83	8/11	PCC84	9/-	VP23	7/6	6X4	6/6
ECC84	8/11	PCF80	12/6	VT52	2/11	6X5GT	7/11
ECC85	8/11	PCF82	12/6	1D5	10/6	10F1	15/11
ECH35	10/11	PCL83	15/6	1R5	7/11	12AH7	7/6
ECH42	9/11	PEN36C	17/6	1S5	7/3	12AH8	9/11
ECH81	8/11	PL33	9/11	1T4	7/3	12SN7GT	19/11
EF40	13/11	PL81	16/6	5U4G	6/6	14S7	14/6
EF41	9/6	PL82	9/6	5Z4G	9/11	19AQ5	9/-
EF42	12/6	PL83	9/11	6AG5	7/6	20P1	17/6
EF50(R)	7/6	PY31	12/11	6AT6	7/6	25A6G	12/11
EF50	4/11	PY80	8/3	6B8G	2/11	35A5	10/6
EF80	8/6	PY81	8/6	6BA6	6/6	35W4	7/6
EF86	12/6	PY82	8/6	6BJ6	7/6	954	1/6
						955	3/11
						956	2/11

Any parcel insured against damage in transit for only 6d. extra per order. All uninsured parcels at customer's risk.

SURPLUS NEW AND GUARANTEED VALVES. All tested before despatch.

Cash with order or C.O.D. only.

Postage and Packing 6d per Valve extra Over £3 Free.

S.A.E. with all enquiries.

TRANSFORMERS
COILS *LARGE OR SMALL QUANTITIES*
CHOKES *TRADE ENQUIRIES WELCOMED*

SPECIALISTS IN

FINE WIRE WINDINGS

MINIATURE TRANSFORMERS, PICK-UP, CLOCK AND INSTRUMENT COILS, ETC. VACUUM IMPREGNATION TO APPROVED STANDARDS

ELECTRO-WINDS LTD.

CONTRACTORS TO G.P.O., M.O.S., L.E.B., ETC.

123-5-7 PARCHMORE ROAD, THORNTON HEATH, SURREY

LIVINGSTONE 2261 EST. 1933

PRINTED CIRCUIT BATTERY PORTABLE

- ★ Printed Circuit
- ★ Handsome Two-tone Cabinet
- ★ 5in. P.M. Loudspeaker
- ★ Ferrite Rod Aerial
- ★ 4-valve Superhet
- ★ Low Consumption Valves (DK96 Range)

Send for fully illustrated and detailed instruction book, which includes circuit diagram, layout, and parts list for building this amazing all-dry Battery Receiver. Price 1/3 post free.

NET TRADE PRICE £6.5.0 (Less Batteries) plus 3/6 carr. & pkg.

Send also for our detailed wholesale lists for Cabinets, Wired Chassis AM, AM/FM, TV Aerials, Electrical Components, Valves, Television and Radio Receivers, etc.

V.E.S WHOLESALE SERVICES LTD.

Dept. (W.W.) 11, Gunnersbury Lane, Acton, W.3

Trade only supplied. Tele: ACOrn 5027/8/9

RADIO CLEARANCE LTD.

TRADE ENQUIRIES INVITED

27, TOTTENHAM COURT RD., LONDON, W.1.

The oldest Component Specialists in the trade

Telephone : MUSEUM 9188 EST. 30 YRS

ELECTROLYTIC CONDENSERS—WE HOLD THE LARGEST STOCK OF ELECTROLYTICS IN ENGLAND

ABBREVIATIONS : C. Clip mounting tag ends. P. Prong mounting. T. Tag ended. S. Sleeved. W. Wire ended.

BIAS & LOW VOLTAGE TYPES

2 MFD. 50 v. 7/16 in. × 1 1/16 in. W/S. **10d.** **5 MFD.** 50 v. 3/4 in. × 1 1/16 in. W **10d.** **8 MFD.** 50 v. 3/4 in. × 1 1/16 in. T. **10d.** **10 MFD.** 25 v. 13/32 in. × 1 in. W. **1/6.** **10 MFD.** 15 v. 3/4 in. × 1 1/16 in. W. **1/6.** **12 MFD.** 25 v. 3/4 in. × 1 1/16 in. W. **10d.** **25 MFD.** 12 v. 3/4 in. × 1 1/16 in. W. **10d.** **25 MFD.** 25 v. 3/4 in. × 1 1/16 in. T/S. **10d.** **25 MFD.** 25 v. 3/4 in. × 1 1/16 in. W/S. **10d.** **25 MFD.** 50 v. 1in. × 1 1/16 in. W/S. **10d.** **50 MFD.** 3 v. 13/32 in. × 1in. W. **1/6.** **50 MFD** 70 v. 1 1/16 in. × 1 1/16 in. T. **1/-.** **100 MFD.** 12 v. 1 1/16 in. × 1 1/16 in. T/S. **10d.** **100 MFD.** 25 v. 1 1/16 in. × 1 1/16 in. T. **1/-.** **100 MFD.** 50 v. 1 1/16 in. × 1 1/16 in. W. **1/6.** **200 MFD.** 25 v. 1 1/16 in. × 1 1/16 in. T. **10d.** **200 MFD.** 35 v. 1in. × 1 1/16 in. T/S. **10d.** **250 MFD.** 12 v. 1 1/16 in. × 1 1/16 in. W/S. **1/-.** **250 MFD.** 6 v. 1in. × 2in. T/S. **1/-.** **250 MFD.** 25 v. 1 1/16 in. × 1 1/16 in. W/S. **1/-.** **250 MFD.** 50 v. 1in. × 2in. T. **1/6.** **350 MFD.** 6 v. 1 1/16 in. × 1 1/16 in. T. **10d.** **400 MFD.** 12 v. 1 1/16 in. × 1 1/16 in. W. **1/-.** **500 MFD.** 6 v. 1in. × 2in. C. **9d.** **500 MFD.** 12 v. 1 1/16 in. × 1 1/16 in. T. **10d.** **500 MFD.** 12 v. 1 1/16 in. × 1 1/16 in. W. **1/-.** **500 MFD.** 6 v. 1 1/16 in. × 1 1/16 in. T. **10d.** **500 MFD.** 25 v. 1in. × 1 1/16 in. T.W.S. **1/6.** **500 MFD.** 25 v. 1in. × 2in. T. **1/-.** **1,000 MFD.** 6 v. 1in. × 2in. T. **2/-.** **1,000 MFD.** 25 v. 1in. × 3in. T. **1/6.** **2,000 MFD.** 12 v 1 1/16 in. × 1 1/16 in. W. **2/-.** **3,000 MFD.** 25 v. 1 1/16 in. × 4 1/16 in. C. **4/-.**

OTHER TYPES

1 MFD. 275 v. 7/16 in. × 1 1/16 in. W/S. **1/-.** **2 MFD.** 150 v. 1/16 in. × 1 1/16 in. T. **9d.** **2 MFD.** 275 v. 1/16 in. × 2in. T. **10d.** **2 MFD.** 500 v. 1/16 in. × 2in. T. **1/-.** **4 MFD.** 150 v. 1/16 in. × 1 1/16 in. T. **9d.** **4 MFD.** 150 v. 1/16 in. × 1 1/16 in. W. **10d.** **4 MFD.** 150 v. 1/16 in. × 1 1/16 in. W/S. **1/-.** **8 MFD.** 150 v. 1/16 in. × 1 1/16 in. T. **9d.** **8 MFD.** 200 v. 1/16 in. × 1 1/16 in. W/S. **10d.** **8 MFD.** 450 v. 1in. × 1 1/16 in. W/S. **1/11.** **12 MFD.** 450 v. 1/16 in. × 2in. T/S. **2/-.** **16 MFD.** 150 v. 1/16 in. × 1 1/16 in. T/S. **1/-.** **16 MFD.** 150 v. 1/16 in. × 1 1/16 in. W/S. **1/-.** **16 MFD.** 275 v. 1/16 in. × 2in. T. **1/3.** **16 MFD.** 350 v. 1/16 in. × 2in. P. **1/6.** **16 MFD.** 350 v. 1/16 in. × 2in. T. **1/9.** **16 MFD.** 450 v. 1in. × 2in. T/S. **2/-.** **20 MFD.** 150 v. 1/16 in. × 1in. T/W. **1/-.** **24 MFD.** 275 v. 1/16 in. × 2in. T/S. **1/6.** **32 MFD.** 275 v. 1in. × 2in. P. **1/6.** **32 MFD.** 275 v. 1in. × 2in. T. **1/9.** **32 MFD.** 350 v. 1in. × 2in. W. **2/-.** **32 MFD.** 450 v. 1 1/16 in. × 2in. W/S. **2/6.** **40 MFD.** 150 v. 1in. × 2in. P. **1/-.** **40 MFD.** 150 v. 1in. × 2in. T/S. **1/3.** **40 MFD.** 350 v. 1in. × 2in. P. **2/-.** **40 MFD.** 350 v. 1in. × 2in. T. **2/3.** **40 MFD.** 450 v. 1in. × 3in. W/S. **2/9.** **40 MFD.** 450 v. 1in. × 2in. P. **2/6.** **50 MFD.** 150 v. 1in. × 2in. T. **1/-.** **50 MFD.** 275 v. 1in. × 2in. T/S. **2/-.** **50 MFD.** 350 v. 1in. × 2in. W/S. **2/3.** **50 MFD.** 450 v. 1in. × 3in. P. **2/6.** **64 MFD.** 275 v. 1in. × 3in. P. **2/6.** **64 MFD.** 350 v. 1in. × 3in. P. **3/-.** **100 MFD.** 270 v. 1 1/16 in. × 2in. C. **2/3.** **100 MFD.** 275 v. 1 1/16 in. × 2in. T/S. **2/6.** **100 MFD.** 275 v. 1in. × 3in. C. **2/6.** **100 MFD.** 300 v. 1in. × 3in. T. **2/9.** **100 MFD.** 350 v. 1 1/16 in. × 3in. C/S. **3/-.** **200 MFD.** 250 v. 1 1/16 in. × 3in. C/S. **2/-.** **200 MFD.** 275 v. 1 1/16 in. × 3in. C. **2/6.** **250 MFD.** 150 v. 1 1/16 in. × 3in. P. **1/3.** **8+8 MFD.** 450 v. 3/4 in. × 1 1/16 in. W/S. **3/-.** **8+8 MFD.** 350 v. 1in. × 2in. T. **2/6.** **8+8 MFD.** 350 v. 1in. × 1 1/16 in. T/S. **2/9.** **8+8 MFD.** 500 v. 1 1/16 in. × 2in. T. **3/6.** **8+16 MFD.** 275 v. 1in. × 2in. P. **2/9.** **8+16× MFD.** 450 v. 1in. × 2in. T/S **3/-.** **8+16 MFD.** 450 v. 1in. × 1 1/16 in. W/S. **3/6.** **16+16 MFD.** 350 v. 1in. × 2in. C. **3/-.** **16+16 MFD.** 450 v. 1in. × 2in. W/S. **4/-.** **16+32 MFD.** 275 v. 1in. × 2in. T. **2/6.** **20+10 MFD.** 450 v. 1in. × 3in. C. **3/-.** **20+20 MFD.** 150 v. 1in. × 2in. W. **2/-.** **24+24 MFD.** 275 v. 1in. × 2in. T. **2/6.** **24+24 MFD.** 350 v. 1 1/16 in. × 2in. T. **3/-.** **32+16 MFD.** 275 v. 1in. × 2in. T. **2/6.** **32+16 MFD.** 350 v. 1 1/16 in. × 2in. T. **3/6.** **32+32 MFD.** 150 v. 1in. ×2in. T. **2/-.** **32+32 MFD.** 275 v. 1 1/16 in. × 2in. P. **2/9.** **32+32 MFD.** 350 v. 1 1/16 in. × 2in. C/S. **4/-.** **40+40 MFD.** 150 v. 1in. × 3in. P. **1/6.** **40+40 MFD.** 150 v. 1in. × 3in. T. **2/-.** **40+40 MFD.** 150 v. 1in. × 2in. W/S. **2/6.** **40+40 MFD.** 275 v. 1 1/16 in. × 2in. C. **2/9.** **40+40 MFD.** 450 v. 1 1/16 in. × 3in. P. **3/-.** **50+20 MFD.** 150 v. 1in. × 2in. P. **1/9.** **50+50 MFD.** 150 v. 1in. × 2in. T. **2/-.** **50+50 MFD.** 275 v. 1 1/16 in. × 2in. P. **2/6.** **50+50 MFD.** 275 v. 1 1/16 in. × 3in. C. **2/6.** **50+50 MFD.** 300 v. 1in. × 3in. T. **3/-.** **50+50 MFD.** 300 v. 1 1/16 in. × 2in. T. **3/-.** **50+50 MFD.** 350 v. 1 1/16 in. × 3in. T. **3/6.** **60+100 MFD.** 275 v. 1 1/16 in. × 3in. C. **4/-.** **60+200 MFD.** 275 v. 1 1/16 in. × 3in. C. **4/-.** **60+200 MFD.** 275 v. 1 1/16 in. × 4 1/16 in. C. **4/-.** **60+250 MFD.** 250 v 1 1/16 in. × 4 1/16 in. T. **5/6.** **80+50 MFD.** 150 v. 1in. × 2in. W/S. **2/-.** **100+65 MFD.** 350 v. 1 1/16 in. × 3in. P. **4/-.** **100+100 MFD.** 275 v. 1 1/16 in. × 3in. C. **4/6.** **100+200 MFD.** 250 v. 1 1/16 in. × 4 1/16 in. C. **4/6.** **100+200 MFD.** 275 v. 1 1/16 in. × 4 1/16 in. C. **5/6.** **100+200 MFD.** 275 v. 1 1/16 in. × 4 1/16 in. C. **5/6.** **100+200 MFD.** 350 v. 2in. × 4 1/16 in. T. **6/-.** **125+200 MFD.** 275 v. 1 1/16 in. × 4 1/16 in. C. **5/6.** **200+200 MFD.** 275 v. 1 1/16 in. × 4 1/16 in. C. **5/6.** **1,000+1,000 MFD.** 6 v. 1in. × 3in C. **3/-.** **8+8+8 MFD.** 350 v. 1in. × 2in. T **4/6.** **16+8+4 MFD.** 275 v. 1in. × 2in P. **2/-.** **16+16+16 MFD.** 275 v 1in. × 2in. P. **3/-.** **16+32+32 MFD.** 275 v. 1in. × 3in. C. **3/6.** **20+10+10 MFD.** 275 v. 1in. × 2in. P. **3/-.** **20+20+20 MFD.** 150 v. 1in. × 2in. P. **2/-.** **25+25+25 MFD.** 25 v. 1in. × 2in. T/S. **1/6.** **30+25+20 MFD.** 150 v. 1 1/16 in. × 2in. C/S. **2/-.** **32+32+2 MFD.** 275 v. 1 1/16 in. × 2in. C. **2/6.** **32+32+8 MFD.** 275 v. 1in. × 3in. C. **3/-.** **32+32+8 MFD.** 350 v. 1 1/16 in. × 2in. C. **3/6.** **32+24+24 MFD.** 350 v. +16 MFD. 500 v. 1 1/16 in. × 3in C. **4/-.** **40+20+10 MFD.** 350 v. 1in. × 3in. P. **3/6.** **40+20+70 MFD.** 150 v. 1in. × 2in. T/S. **2/6.** **40+20+20 MFD.** 450 v. 1 1/16 in. × 3in. T/S. **4/6.** **40+30+20 MFD.** 275 v. 1 1/16 in. × 3in. P. **3/6.** **40+40+20 MFD.** 275 v. 1in. × 3in. T. **3/-.** **40+40+20 MFD.** 350 v. 1 1/16 in. × 3in. P. **4/-.** **50+50+50 MFD.** 350 v. 1 1/16 in. × 3in. P. **3/6.** **100+250+250 MFD.** 275 v. 2in. × 4 1/16 in. C. **6/-.** **200+200+250 MFD.** 275 v 2in. × 4 1/16 in. C. **6/6.**

All voltages quoted are working

TO AVOID DELAY ALL ORDERS MUST INCLUDE AN ADEQUATE AMOUNT TO COVER POSTAGE AND PACKING

SUB MINIATURE ELECTROLYTIC CONDENSERS
2 MFD., 6 MFD., 8 MFD., 10 MFD. 1/16 in. × 7/16 in. 3 v or 6 v. **16 MFD.** and **30 MFD.** 7/16 in. × 1/2 in. **2/9 each.**

MINIATURE BIAS CONDENSERS
25 MFD. 25 v. **50 MFD.** 12 v. **50 MFD.** 25 v. 3/4 in. × 1 1/16 in. **1/6 each.**
25 MFD. 50 v. 1/16 in. × 1 1/16 in. **1/9 each.**

SUB MINIATURE METALLISED PAPER CONDENSERS
1/2 in. × 1/2 in. 100 v. working.
.005 MFD., .0022 MFD., .002 MFD., .001 MFD. 9d. each.
01 MFD., .02 MFD. Price 9d. each. .04 MFD. 10d. each.

MINIATURE MICA CONDENSERS 6d. EACH
350 v. wkg. 47 pF., 50 pF., 100 pF., 300 pF., 350 pF., 500 pF., 750 pF., 1,000 pF.

SILVER MICA CONDENSERS. 4d. EACH
1 pF., 3 pF., 5 pF., 8.2 pF., 15 pF., 20 pF., 22 pF., 27 pF., 30 pF., 40 pF., 50 pF., 60 pF., 65 pF., 75 pF., 100 pF., 150 pF., 200 pF., 250 pF., 240 pF., 300 pF., 330 pF., 350 pF., 375 pF., 430 pF., 617 pF., 1,200 pF., 1,500 pF., 1% AND 2%. 6d. EACH.
60 pF., 75 pF., 85 pF., 90 pF., 100 pF., 125 pF., 141 pF., 145 pF., 175 pF., 180 pF., 184 pF., 240 pF., 300 pF., 330 pF., 381 pF., 400 pF., 458 pF., 540 pF., 565 pF., 2,700 pF.

CERAMIC CONDENSERS. 6d. EACH.
1 pF., 1.5 pF., 2 pF., 3.3 pF., 4 pF., 5 pF., 6.8 pF., 8.2 pF., 10 pF., 12 pF., 15 pF., 16 pF., 18 pF., 22 pF., 25 pF., 30 pF., 33 pF., 35 pF., 39 pF., 47 pF., 50 pF., 56 pF., 60 pF., 68 pF., 70 pF., 80 pF., 100 pF., 120 pF., 180 pF., 220 pF., 350 pF., 1,000 pF., 2,000 pF.

DISC CERAMIC CONDENSERS 500 v. WKG.
.001 MFD., .0025 MFD., .002 MFD., .003 MFD., .005 MFD. 6d. each. .01 MFD. 9d. each.

FEED THROUGH CONDENSERS. 6d. EACH
100 pF., 1,000 pF.

HIGH VOLTAGE SILVER MICAS
100 pF., 5 kV. working. 300 pF., 8 kV. Test. 9d. each.

VARIABLE GANG-CONDENSERS
Twin Gang. 20 pF. Ideal for F.M. 2in. × 1 1/16 in. × 1in., **2/- each.**
Twin Gang. .0005 MFD. 2 1/16 in. × 2in. × 1 1/16 in. Spindle 1/4 in., **4/- each.**
Min. Twin Gang. .0005 MFD. 2 1/16 in. × 1 1/16 in. × 1 1/16 in. Spindle 1in., **5/6 each.**
Min. Twin Gang. .0005 MFD. 2 1/16 in. × 1 1/16 in. × 1 1/16 in. Spindle 1in. with trimmers, **6/6 each.**

METALLISED PAPER TUBULARS
T.C.C. .02 MFD. 350 v.w. **6d. Dubilier. .05 MFD.** 350 v.w. **6d.** Hunts. **.05 MFD.** 500 v.w. **9d.** Dubilier. **.1 MFD.** 150 v. **4d. .1 MFD.** 500 v.w. **9d.**

WIRE WOUND RESISTORS
5 watt size 1/16 in. × 1 1/16 in. **10d. each**
7 Ω., 7.5 Ω., 8 Ω., 10 Ω., 12 Ω., 15 Ω., 20 Ω., 22 Ω., 24 Ω., 27 Ω., 30 Ω., 33 Ω., 34 Ω., 36 Ω., 39 Ω., 41 Ω., 43 Ω., 45 Ω., 47 Ω., 50 Ω., 51 Ω., 52 Ω., 54 Ω., 55 Ω., 56 Ω., 60 Ω., 64 Ω., 66 Ω., 67 Ω., 68 Ω., 70 Ω., 75 Ω., 80 Ω., 82 Ω., 110 Ω., 136 Ω., 150 Ω., 160 Ω., 170 Ω., 180 Ω., 200 Ω., 220 Ω., 250 Ω., 270 Ω., 300 Ω., 320 Ω., 330 Ω., 375 Ω., 400 Ω., 430 Ω., 470 Ω., 500 Ω., 560 Ω., 600 Ω., 620 Ω., 680 Ω., 800 Ω., 820 Ω., 940 Ω., 1 K., 1.1 K., 1.3 K., 1.4 K., 1.6 K., 1.7 K., 1.8 K., 2 K., 2.2 K., 2.4 K., 2.5 K., 2.7 K., 3.3 K., 4.5 K., 4.7 K., 5 K., 5.2 K., 5.6 K., 5.9 K., 6 K., 6.2 K., 6.5 K., 6.8 K., 7 K., 8.5 K., 9 K., 10 K.

6 watt size. 1/16 in. × 1 1/16 in. **1/- each.**
47 Ω., 68 Ω., 100 Ω., 200 Ω., 250 Ω., 300 Ω., 350 Ω., 400 Ω., 470 Ω., 500 Ω., 560 Ω., 680 Ω., 1 K., 1.6 K., 1.8 K., 1.9 K., 2 K., 2.7 K., 3 K., 3.3 K., 4.3 K., 4.7 K., 5.1 K., 5.6 K., 6.2 K., 6.4 K., 6.8 K., 11 K., 13 K., 14.5 K.

7 watt size. 1/16 in. × 1 1/16 in. **1/- each.**
10 Ω., 12 Ω., 20 Ω., 22 Ω., 29 Ω., 33 Ω., 45 Ω., 50 Ω., 55 Ω., 57 Ω., 60 Ω., 120 Ω., 220 Ω., 270 Ω., 330 Ω., 390 Ω., 470 Ω., 600 Ω., 620 Ω., 680 Ω., 800 Ω., 820 Ω., 1 K., 1.6 K., 1.8 K., 3 K., 3.3 K., 3.7 K., 3.8 K., 4.3 K., 4.7 K., 5 K., 7 K., 11 K., 12.5 K., 13 K., 14 K., 15 K., 17 K.

HIGH STABILITY RESISTORS
1/2 watt, 1/4 watt, 1/8 watt. 1% 2%, 5%. Price 1% **10d.** 2% **8d.** 5% **6d.** Please send lists first.

CERAMIC AND CARBON RESISTORS
1/4, 1/2, 1 watt **3d. each.** 5% **4d. each.** 1 watt **4d. each.** 2 and 3 watts **5d. each.** Please send lists first.

MAINS DROPPERS
.3 amps., .2 amps., .15 amps., .1 amps. 2/6 each.
LARGE VARIETY IN STOCK

T.V. COMPONENTS
34 Mc/s. I.F. Transformers. Size 1/2 × 1/2 × 2 1/2. **1/6.**
38 Mc/s. I.F. Transformers. Size 1/2 × 1/2 × 2 1/2. **2/-.**
Frame Output Transformers. Wide angle. **6/- each.**
Focus Magnets. Adjustable for 12in. tube. **6/- each.**
Choke. 2 Henries. 350 m/a. 30 Ω res., **3/11 each.**
Choke. 1.9 Henries. 230 m/a., **2/11 each.**
Choke. 1.3 Henries. 150 m/a., **2/6 each.**

FOR CALLERS ONLY
FERRITE RODS
5in. × 1/4in. **10d. each.** 8in. × 1/4in. **1/3 each.** 4in. × 1/4in., **10d. each.** 5in. × 1/4in. **1/- each.** 6in. × 1/4in. **1/3 each.** 8in. × 1/4in., **1/6 each.** 3in. × 1/2in., **1/- each.** 5in. × 1/2in., **1/6 each.** 6in. × 1/2in., **1/9 each.** 9in. × 1/2in., **2/3 each.** 4in. × 1/2in., **1/- each.** 5in. × 1/2in., **1/6 each.** 8in. × 1/2in., **2/6 each.** 8in. × 1/2in. oval, **2/- each.** 8in. × 1/2in. × 1/2in., **2/- each.**
T.V. Masks. 14in. Tube, 3/- each.
P.M. Speakers. 3in. 3 ohm. 15/- each.
M.W. Frame Aerials on alloy plate, **1/6 each.**
Aluminium Sheet, all sizes in stock.

SWITCHES ROTARY
Size 1 1/8 in. dia. 2in. spindles. Price 2/11 each.
1 pole 10 way. 1 pole 12 way. 2 pole 2 way. 2 pole 3 way. 2 pole 4 way. 2 pole 5 way. 2 pole 6 way. 3 pole 3 way. 3 pole 4 way. 4 pole 3 way.

VALVE HOLDERS
4 pin Brit. Pax **2d. each. 4 pin** U.X. Amp. **7d. each. 5 pin** Brit. Pax. **2d. each. 7 pin** Brit. Pax. **3d. each. 7 pin** Brit. Amp. **4d. each. 7 pin** Brit. Cer **4d. each. Int. Octal Pax. 3d. each. Int. Octal Amp. 8d. each. Mazda Octal Pax. 3d. each. Loctals Amp. 6d. each. B7G** Pax. **6d. each. B7G** P.T.F.E. **8d. each. B7G** Cer. **10d. each. B7G** Cer. with saddle and valve retaining spring **1/- each. B7G** Cer. with skirt **10d. each. B8A** Pax. **4d. each. B8A** Amp. **6d. each. B8A** Cer. **8d. each. B9A** Pax. **6d. each. B9A** Amp. **8d. each. B9A** Amp. with skirt **10d. each. B9A** Cer. **10d. each. B9A** Cer. with saddle and valve retaining spring **1/- each. B9A** ceramic with skirt **1/- each. B9A** printed circuit **1/-.**
When ordering valve holders with valve retaining springs state whether short, med. or long springs required.

POTENTIOMETERS CARBON
Less Switch. Dia. 1in., 2 1/4in. spindles 5 K., 10 K., 25 K., 50 K., 100 K., 250 K., 500 K., 1 Meg., 2 Meg. **2/6 each. With D.P. Switch Dia.** 1in., 2 1/4in. spindles, 5 K., 10 K., 25 K., 50 K. 100 K., 250 K., 500 K., 1 Meg., 2 Meg., **4/6 each.**
T.V. pre-set Controls with knurled knob and 6 BA fixing dia., **25 K., 50 K., 100 K., 250 K. 500 K., 1/3 each. 25 K.,** wire wound, **1/6 each.**

PRE-SET TRIMMERS T.V. TYPE
With knurled knob and 6 BA fixing. **450 pF., 750 pF., 1,000 pF., 1/6 each.**

METAL RECTIFIERS
G.E.C. 250 v. 250 m/a. T.V. Price **10/- each. Westinghouse.** 16 RD. 2.2.8.1, **7/- each. Westectors** W.X.6, **1/- each.**

METERS
0-50 m/a. 2in. square, **7/6 each.**
350 m/a. Thermo Couple, 2in. round plug mounting. **2/6 each.**

CHOKES
Parmeko Smoothing 8/9 Hy. 100 mA., 6/6. R.F. Type. 2 or 3 pie, **4d. each. L.T. Type. 4d. and 6d. H.F. T'V Type. 3d. V.H.F. Type. 6d. Mains Hash Twin Type 2/-. Vibrator Hash Type. 1/-.**

MISCELLANEOUS
Vibrator Transformers, 6 v. or 12 v., **7/6 each.**
Vibrators. Plessey 6 8R78DT. Syn. 7-pin **7/6 each. Perspex Sheet.** Tinted. Size, 16 1/4 × 13 × 1/8 in. **3/- each. Bull Dog Clips, 9d. each. Crocodile Clips 4d. each. Co-Axial Cable.** Semi air spaced. **8d. yd. Double Pole Toggle Switches, 1/- each.**

S.A.E. WITH ALL ENQUIRIES PLEASE. All orders received, despatched the same day.

ALL ARTICLES ADVERTISED ARE BRAND NEW AND CARRY OUR USUAL GUARANTEE.
PLEASE STATE IF THE NEAREST VALUE COMPONENT WILL SUIT, SHOULD THE ONE ORDERED BE OUT OF STOCK.
WE HAVE MANY OTHER ITEMS FAR TOO NUMEROUS TO LIST, WHY NOT PAY US A VISIT WHEN IN TOWN ? IT WILL PAY YOU.
TERMS OF BUSINESS. CASH WITH ORDER OR C.O.D.

CASH OR TERMS

END OF SEASON BARGAINS



HOME RADIO 79/6

A.C./D.C. Universal mains. 5-valve octal superhet 3 w/wave band receiver. Can be adapted to Gram. P.U. In attractive wood cabinet. 18½in. x 11½in. x 8½in. Ins., carr. 7/6.

T.V. RECTANGULAR TUBES. 12 Months' Guarantee.

17" £7.10.0 **14" £5.10.0**

(Reconditioned.) As supplied for past 8 years. 6 months' full replacement, 6 months' progressive. Made possible by the high quality of our tubes. Ins., carr. 15/6. Convert your 9in., 10in., 12in. tubes to 14in., 15in., 16in. (round tubes). Our special offer for these sizes £5. Details on how to "Do-It-Yourself" in our free catalogue. 12in. TV Tubes £6. 3 months' guarantee on all round tubes. 15/6 Ins., carr. on all tubes.



DENCO RADIOGRAM CHASSIS 97/6

3 or 4-waveband Turret Tuned. Superhet. A.C. chassis with 6in. or 8in. speaker. Size: 8½in. x 10in. x 12in. Octel valves. Ins., carr. 7/6

SUPER CHASSIS 99/6

5-valve superhet chassis, including 8in. P.M. speaker and valves. Four control knobs (tone, volume, tuning w/change switch). Four w/band with position for gram P.U. and extension speaker. A.C. Ins., carr. 5/6.

OPEN SATURDAY ALL DAY. THURSDAY CLOSED 1 p.m.

17" T.V. CHASSIS, TUBE & SPEAKER £19.19.6

Latest improved circuits. Higher E.H.T. (brilliant picture). Improved sensitivity (for greater range). Chassis easily fitted in any cabinet. 17in. Rectangular tube on adapted chassis. Less valves. 12 months' guarantee on tube. 3 months' guarantee on valves and chassis. With valves £25/19/6. Valve line up: 6SN7G, 6V6, EY51, 2—6D2's, EL38, EL41 and 7—6F1's. Turret Tuner 50/- extra. State B.B.C. and I.T.A. channel required. Extra channels supplied at 7/6 each. Ins., carr. (incl. tube), 25/-.



14" T.V. CHASSIS, TUBE & SPEAKER £13.19.6

As above with 14in. round tube, less valves. 3 months' guarantee. With valves £19/19/6. Turret Tuner 50/- extra., Ins., carr (incl. Tube) 25/-.

T.V. AERIALS 25/6

For all I.T.A. channels. For outdoor or loft. 3-element at half the original cost. P. & P. 2/6.

GANG CONDENSERS 1/9. 2 and 3 Gangs, .0005. Salvaged, Tested. P. & P. 1/3.

EXTENSION SPEAKER 29/9

Complete. Fitted with 8in. P.M. speaker "W.B." or "GOODMANS" of the highest quality. Standard matching to any receiver (2-5 ohms). Flex and switch included. Unrepeatable at this price. Money refunded if not completely satisfied. Ins., carr. 3/6.

8in. P.M. SPEAKER 8/9. Ideal for kitchen and bedroom extension. Let the lady of the house listen to that radio or TV programme. With output transformer fitted 10/-. P. & P. 2/6.

Send for FREE 1958 Catalogue **DUKE & CO. (Dept. 1), 621/3, ROMFORD RD., MANOR PARK, E.12. Phone: ILF. 6001/3.** *Liverpool St.-Manor Park Stn.—10 mins.*

THE WORLD'S GREATEST BOOKSHOP

FOYLES

FOR BOOKS

FOR ALL YOUR

Technical Books

Foyles is an experience—the largest bookstore on earth. If you're a lover of books, large or small, modern or rare, here's Paradise.'

—*Fielding's Guide to Europe*

119-125 CHARING CROSS ROAD, LONDON, W.C.2.

Gerrard 5660 (20 lines) ★ *Open 9-6 (Thurs. 9-7)*

Nearest Station: Tottenham Court Road

Insulating Sleevings

P.V.C.
SLEEVINGS
INSULATED WIRES
and FLEXIBLES

A.I.D. and A.R.B. Approved

PLASTICABLE
LIMITED

HAWLEY LANE
FARNBOROUGH, HANTS
Phone: FARNBOROUGH, HANTS 85

TRANSFORMERS

We specialise in Transformers with low volts/high current outputs. Input 220/250v



10 V. at 1,000 amps. £34.
8 V. at 500 amps. £25.
3-5-8-10-15-17-21-25 V. at 100 amps. £19.
60 V. at 100 amps. £18.
110/120 V. at 25 amps. £17.



Input 220/250 V.
All 6 Types below £5/12/- each.
3-6-9-12 V. at 65 amps.
6-12-18-24-30 V. at 12 amps.
5 V. at 300 amps.
12 V. at 30 amps
110/120 V. at 7 amps.
55 V. at 12 amps.

Many other STOCK TRANSFORMERS, with outputs up to 25,000 amps at low voltages.

RECTIFIER SETS

Input 200/250 V A.C.
Outputs:
80-115 V. D.C. at 25 amps. £40.
110/120 V. D.C. at 8 amps. £20.
220/250 V. D.C. at 6 amps £26.
36 V. D.C. at 50 amps. £25.
12-30 V. D.C. at 12 amps. £15.
OTHER RECTIFIER SETS with outputs up to 200 amps

VOLTAGE REGULATORS

Input 210-230 V. Output 220-250 V. infinitely variable at 10 amps. £18. Voltage regulators with other ranges available.

HARMSWORTH, TOWNLEY & CO. 2 JORDAN STREET, MANCHESTER 15

CENTRAL 4281

VALVES

Guaranteed All Tested Before Dispatch.

AC6PEN	6/6	KF35	8/6	UF89	10/6	6C8G	5/-
AC/TH1	34/9	KK32	23/-	UL41	10/6	6CD6G	31/4
ATP4	3/6	KLL32	8/6	UL44	27/10	6CH6	7/6
AZ31	17/5	KT24	5/-	UL46	24/4	6D6	5/-
CBL31	24/4	KT33C	10/-	UL84	11/6	6F1	13/6
CCH35	24/4	KT36	27/10	UU6	20/11	6F6G	7/6
CL33	20/2	KT55	13/6	UU8	27/10	6F6M	7/6
CY31	17/5	KT66	15/-	UU9	8/6	6F13	14/-
DAF96	10/6	KTW61	9/9	UY41	8/6	6F15	14/-
DF96	10/6	KTW63	7/6	UY85	10/-	6G6G	4/6
DK96	10/6	KTZ41	8/6	VP2B	8/-	6H6	2/6
DL96	10/6	ME91	7/6	VP23	6/6	6H6GT	2/6
DM70	8/6	MH4	7/6	VP41	8/6	6J5GT	5/6
EA50	1/6	MH41	7/9	VR105/30	6/6	6J5M	6/6
EABC80	10/-	N37	18/1	VR116	4/-	6J6	6/-
EAC91	7/6	N78	12/6	VR150/30	9/-	6J7G	6/6
EAF42	10/6	OZ4	5/6	VU120A	3/6	6J7M	9/-
EB34	2/-	P61	3/6	VU39 (MU12/14)	8/9	6K6GT	7/-
EB41	9/6	PCC84	10/-	VU111	2/6	6K7G	5/-
EBC33	7/6	PCF80	13/6	W77	8/6	6K7GT	7/-
EBC41	10/6	PCF82	12/6	W729	13/6	6K7M	6/9
EBF80	10/6	PCL82	14/6	X65	12/6	6K8G	8/6
EBF89	18/1	PCL83	14/6	X78	22/3	6K8GT	10/-
EBL21	24/4	PL38	27/10	X79	11/6	6K25	20/11
EBL31	24/4	PL81	16/-	Y63	9/-	6L6G	9/-
EC91	7/6	PL82	9/6	Z309	9/6	6L7	7/6
ECC40	12/6	PL83	11/6	Z359	9/6	6N7	7/6
ECC84	10/3	PX25	12/6	Z759	9/6	6P28	27/10
ECC85	9/6	PY80	9/-	1A3	3/6	6Q7GT	9/-
ECF80	13/6	PY81	10/-	1A5GT	6/-	6SA7GT	8/-
ECF82	12/6	PY82	8/6	1A7	12/6	6SG7	7/6
ECH21	24/4	PY83	10/-	1C2	11/6	6SH7	6/-
ECH35	10/6	PZ30	20/11	1C5GT	12/6	6SJ7	8/6
ECH42	10/6	PEN4DD	27/10	1D6	12/6	6SK7	6/-
ECH81	9/-	PEN25	5/-	1H5GT	10/6	6SL7GT	8/-
ECL80	13/6	PEN44	27/10	1L4	6/6	6SN7GT	7/6
ECL82	12/6	PEN45	27/10	1LD5	3/6	6SQ7	9/3
EF22	8/6	PEN46	7/-	1N5	10/6	6U4GT	14/-
EF36	6/-	PEN220A	4/-	1R5	8/-	6U5/6G5	8/6
EF37A	12/-	PENA4	15/-	1S4	10/6	6U5G	8/6
EF39	6/6	QP21	7/6	1S5	7/6	6U7G	8/6
EF40	13/6	R16	27/10	1T4	7/6	6V6G	7/-
EF41	9/9	R19	13/6	1U5	7/6	6V6GT	7/-
EF42	14/-	SP41	3/-	2C26	1/6	6V6M	8/6
EF50	4/-	SP61	3/-	2X2	4/6	6X4	7/6
EF55	10/-	SP220	3/11	3A4	7/-	6X5G	7/-
EF80	9/6	T41	24/4	3D6	5/-	6X5GT	7/-
EF85	9/-	TH2	9/-	3Q4	9/-	6/30L2	12/6
EF86	13/6	TP25	27/10	3Q5GT	9/6	7B7	8/6
EF89	10/-	U10	10/6	3S4	8/-	7C5	8/-
EK32	8/6	U14	(DW4/500) 8/6	3V4	9/-	7C6	8/-
EL32	5/6	U22	8/-	4D1	3/-	7H7	9/-
EL33	20/2	U37	27/10	5R4GY	9/6	7Q7	9/-
EL38	27/10	U45	15/-	5U4G	8/-	7S7	9/6
EL41	10/6	U329	14/6	5Y3G	8/-	7Y4	8/6
EL42	12/-	U403	17/5	5Y3GT	8/-	8D2	2/9
EL84	10/6	U404	11/10	5Z4G	10/-	9D2	3/6
EM34	10/6	U801	31/4	6A7	13/-	10F1	27/10
EM80	10/6	UABC80	10/6	6A8G	10/-	12A6	6/6
EM81	11/6	UAF42	10/6	6AC7	6/6	12AH8	11/6
EY51	13/6	UB41	9/6	6AG5	5/6	12AT6	10/6
EY86	17/6	UBC41	10/-	6AK5	6/6	12AT7	9/-
EZ40	9/-	UBF80	9/6	6AL5	6/6	12AU6	10/6
EZ41	10/-	UCC84	20/11	6AM6	9/-	12AU7	7/6
EZ80	8/9	UCF80	23/-	6AQ5	7/6	12AX7	8/6
EZ81	11/10	UCH42	10/6	6AT6	8/6	12BA6	9/-
EZ90	8/-	UCH81	11/6	6AU6	10/6	12BE6	10/-
E1148	2/-	UCL82	23/-	6B4	5/-	12BH7	11/6
FW4/500	10/-	UCL83	25/9	6B8G	4/-	12C8GT	8/-
GZ32	12/-	UF41	10/6	6BA6	7/6	12H6GT	3/-
H30	5/-	UF85	10/6	6BE6	8/-	12J5GT	4/6
HL23DD	8/6	6C6	5/-	6BG6G	24/4	12J7GT	10/6
K40N	9/-			6BH6	16/-	12K7GT	8/6
				6BJ6	9/-	12K8GT	13/6
				6BR7	11/6	12Q7GT	8/6
				6BW6	8/6	12SC7	1/6
				6BW7	10/-	12SG7	7/6
				6C4	7/-	12SH7	5/6
				6C5GT	6/6	12SJ7	8/-
				6C6	5/-	12SK7	6/-
						12SL7	8/-
						12SN7GT	17/6
						12SQ7	8/6
						14S7	14/6
						15D2	7/9
						19BG6G	24/4
						20D1	16/-
						20F2	27/10
						20P1	27/10
						20P3	20/11
						20P5	20/11
						25A6G	11/6
						25L6GT	10/-
						25Y5	9/9
						25Y5G	9/9
						25Z4	9/6
						25Z5	10/-
						25Z6	10/-
						30F5	12/6
						30FL1	12/6
						30P4	21/7
						30P12	12/6
						30PL1	12/6
						35L6GT	9/6
						35W4	8/6
						35Z4GT	8/-
						35Z5GT	9/-
						42	8/-
						50C5	11/6
						50CD6G	31/4
						50L6GT	8/6
						75	11/6
						77	7/6
						80	8/6
						142BT	3/6
						185BT	34/9
						210DDT	4/6
						210VPT	3/6
						807	6/6
						954	2/-
						955	4/9
						956	3/6
						9001	5/6
						9002	5/6
						9003	5/6
						9004	5/6
						9006	5/6

MAINS TRANSFORMERS

3-Way Mounting Type.

MT1
Primary: 200–220–240 v. Secondaries: 250–0–250 v. 80 m/A 0–6.3 v. 4 amp. 0.4 v. 2 amp. Both tapped at 4 v., **21/9** each.

MT2
Primary: 200–220–240 v. Secondaries: 350–0–350 v. 80 m/A 0–6.3 v. 4 amp. 0.5 v. 2 amp. Both tapped at 4 v., **21/9** each.
Both above available in 100 m/A versions without 4 Volt Tap. Price **25/9.**

MT3
Primary: 200–220–240 v. Secondary: 30 v. 2 amps. Taps at 3 v., 4 v., 6 v., 8 v., 9 v., 10 v., 15 v., 18 v., 20 v., 24 v., **21/9** each. Postage and Packing please add 2/- per transformer.

CHASSIS. Aluminium, undrilled with reinforced corner. Available in the following sizes:—

	Each		Each
6×4×2½in.	**4/6**	12× 8×2½in.	**8/6**
8×6×2½in.	**6/3**	14× 3×2½in.	**6/-**
10×7×2½in.	**7/3**	14× 9×2½in.	**12/-**
12×3×2½in.	**5/9**	16× 6×2½in.	**8/6**
12×5×2½in.	**6/9**	16×10×2½in.	**14/-**

All are four-sided—ideal for radio receivers—amplifiers—power packs, etc.

The BRAYHEAD TURRET CONVERTOR. Comprehensive installation instructions, plug-in facilities for over 600 popular models of TV sets of standard I.F. ranges. Price **27/7/-** each. Illustrated leaflets available. Adaptors, **7/6** each.

SPECIAL PURCHASE

8in. P.M. Speaker Units with Output Transformer removed from equipment. 11/6 each.

WB "Stentorian"
Model HF 812 die-cast chassis ..... **84/6** each
Model HF 1012 die-cast chassis ..... **99/9** each
The latest HF 1016. 10 watts. 30-15000 CPS. Frequency Response ..... **£8.**
Universal speech coils.

CO-AXIAL CABLES, ETC.
Aerialite Aeraxial 597, semi-airspaced, **9d.** yard.
Ashton Co-axial cable, solid, **6d.** yard.
Ribbon feeder (Flat), 300 ohms, **6d.** yard.

AERIALITE AERAXIAL No. 499. For fringe areas 1/8 yard.

PUBLICATIONS

No. 138—HOW TO MAKE AERIALS FOR TV (Band I and III) and V.H.F. (Band II). Data for all Channels. Ten different designs for local and fringe areas. **2/6** ea

No. 140—TELEVISION SERVICING FOR BEGINNERS. 40 pages of Information. **4/6** each.

No. 142—MODERN TV CIRCUITS AND FAULT-FINDING GUIDE. Many interesting Circuits included. **4/6** each.

Reprint No. 5—TV FAULT-FINDING. Profusely illustrated with Photographs taken from a Television Screen. **5/-** each.

Reprint No. 11—QUALITY AMPLIFIERS FOR A.C. MAINS. Articles describing a number of amplifiers selected for their quality of performance and ease of construction. **4/6** each.

All publications plus 4d. each postage.

LOUDSPEAKER UNITS

Make	Type	Size	Price
Plessey	Square	3in.	**19/6** each
Lectrona, Plessey	Round	5in.	**17/6** each
Goodmans, Plessey	Round	6½in.	**18/6** each
Goodmans, R. & A.	Round	8in.	**19/6** each
Plessey, R. & A., Elac	Round	10in.	**25/6** each
Elac	Elliptical	7in.×4in.	**19/6** each
Elac	Elliptical	10in.×6in.	**25/6** each

All the above are PM units with 2 to 3 ohms speech coils.

RTC 12in. heavy duty 20 watts model, 15 ohms Speech Coil **£5 5 0**

6½in. Mains Energised Speaker 17 6
8in. Mains Energised Speaker £1 1 0
All have field coils of approx. 600 ohms.

ALPHA RADIO SUPPLY CO

103, LEEDS TERRACE, WINTOUN STREET, LEEDS, 7.

TERMS: Cash with order or C.O.D. Postage and Packing charges extra, as follows: Orders value 10/- add 1/-; 20/- add 1/6; 40/- add 2/-; £5 add 3/- unless otherwise stated. Minimum C.O.D. fee and postage 3/-.
For full terms of business see inside cover of our catalogue.
Personal Shoppers 9 a.m. to 5 p.m. Mon. to Friday. Saturday 10 a.m. to 1 p.m.

SAMSON'S SURPLUS STORES

LONDON'S GREATEST DEALERS IN RADIO AND ELECTRONIC EQUIPMENT

169-171 EDGWARE RD. LONDON W.2

Tele: PAD 7851—AMB 5125



NEWTON BROS. (DERBY) LTD. MINIATURE ROTARY TRANSFORMERS. Input 24 volt. Output 110v. 120 M/A. Fan Cooled. Size. Length 4¾in., Dia 2in. End Covers removed to show fan. Supplied Brand new, **17/6**. P.P. 2/–.

HEAVY DUTY TRANSFORMERS. Pri. 230v. Sec. 50v., 50a. Built-in Steel Container with fitted 0-100 Volt Meter. Voltage Regulator Switch. Input and Output Sockets. Mains Switch. Wound at 800 amps. per sq. in. Will stand 100% overload. Supplied brand new at a fraction of Maker's price, **£15/0/0**. Plus carr. Pri. 230v. Sec. 4v.-7v.-11v., 200 amps. Fraction of Maker's price, **£8/10/0**, plus carr. Pri. 220-230v. Sec. 50v. 30a. New in Maker's cases, **£6/10/0**, plus carr. Pri. 180-230v. Sec. 8.4v. CT 10A. Tropical Rating, **19/6**, Carr. 4/–.

EX-ARMY FIELD TELEPHONES, Type D.V. Complete with Hand Set and Batteries in Perfect Condition, **49/6**, Carr. 4/–.

ADMIRALTY H.T. TRANSFORMERS BY PARMEKO. Pri. 200-240v. Sec. 380-0-380 volts, 240 m/a., 5v. 3a., 5v. 3a., 6.7v. 4.5a, 6.3v. 1.5a. Supplied Brand New in Maker's Carton, **39/6**, Carr. 4/–.

TELEPHONE CABLE, Single D3, 1/3 Mile Drums, **19/6**, Carr. 4/–. Brand New 1 Mile Drums. Fraction of Maker's price, **75/–**, Carr. **7/6**.

VARIAC TRANSFORMERS. Input 115v. Output 0-130 5 amp. Cont. 7.5 amp. max., **67/6**, Carr. 4/–.

2,000 WATT IMMERSION HEATERS. 220-240v. Length 18in. dia. 1¾in. With flange nut and washer. Manufactured by Campbell Eng. Co., **29/6**, P. & P. 3/–.

L.T. SUPPLY UNITS. Type 115. A.C. Input 200-240v. Output 24v. 26 amps. Rating continuous. Ideal for charging 24v.Batteries at a high current. Size 1ft. 6in. x 1ft. 6in. x 1ft. 6in., **£17/10/0**, Plus carr.

S.T.C. RECTIFIER SETS. Type LU 3181c, A.C. Input 200-250v. Output, 220v. 1.5 amp. D.C. Tropically rated, fused. Size 1ft. 10in. x 1ft. 3in. x 10in. Brand new, **£12/10/0**, Plus carr.

HEAVY DUTY SLIDING RESISTORS. 79 ohms 2.9-0.65a. Double tube geared drive fitted with automatic limited switch, **32/6**. 5.3 ohm 8 amps, geared drive, **25/–**, 2 ohms 16 amps Slider control, **22/6**, 1 ohm 12 amps Slider control, **10/6**. 50 ohm 1 amp, Slow motion geared drive, **8/6**. 29.5 ohm 4.6-1.4 amps. geared drive, **17/6**. 95 ohms 3.3 amps, No control but fitted with adjustable tappings, **22/6**. 17.5 ohm fixed **10/6**. 800 ohms 0.5 amp, **10/6**. 100 ohms 1.6 Slider control completely enclosed, **25/–**. Postage on all Resistors, 3/–.

PERSONAL SHOPPERS WELCOME. ORDERS ACCEPTED M/A FROM COLLEGES, SCHOOLS, LABORATORIES, ETC.



VERY POWERFUL AMERICAN REVERSIBLE GEARED MOTORS. 80 v. D.C. ¼ R.P.M. will operate on 50v. slightly slower current consumption 0.3 amps. Overall size of Motor and Gearbox 7½in. x 4in. x 4in. All Metal Gears **39/6**, P. & P. 3/–. Transformer and Rectifier for above Motors 50v. D.C. working **37/6** the pair.

ROLLS-ROYCE COOLANT PUMPS. A heavy duty Turbine Pump driven directly from a splined socket. 1,000-1,500 g.p.h., 1¼in. bore outlet. Brand New in Maker's cartons, **47/6**, Carr. 4/–.

CARBON RESISTORS. ½-3 watt **10/–** per 100. Large selection of values, P. & P. 1/–.

SILVER MICA, MICA AND TUBULAR CONDENSERS. 10/– per carton of 50, Good Selection, P. & P. 1/–.

EVERYTHING FOR THE AMATEUR

RADIO HAM SHACK LIMITED

Convert to a modern radiogram and save money

● **COLLARO "CONQUEST"** Latest 4-speed Autochanger with "Studio" P.U. In maker's sealed carton. **£9.0.0** (*plus 3/6 postage*)

● **B.S.R. "MONARCH"** Latest 4-speed Autochanger in sealed carton as advertised. **£9.0.0** (*plus 3/6 postage*)

● **ETAAR GALAXY** 4-speed Autochanger in sealed carton but without guarantee. **£4.0.0** (*plus 3/6 postage*)

1/- BRINGS THE MOST COMPREHENSIVE LIST yet compiled of equipment—components, materials, accessories, valves, books, etc., etc.—it will save you pounds.

RADIO HAM SHACK LTD., 155, SWAN ARCADE, BRADFORD 1, YORKS

THE W. RIDING MAIL ORDER SPECIALISTS

POLYTHENE

INSULATORS, END CAPS, PLUGS, ETC.

for

T.V. AERIALS

Standard Articles or Special Mouldings

AMPLEX APPLIANCES (KENT) LTD.

19 DARTMOUTH ROAD, HAYES, BROMLEY, KENT

(RAVensbourne 5531)

All export enquiries to

ANGLO NETHERLAND TECHNICAL EXCHANGE LTD., 3, TOWER HILL, LONDON, E.C.3.

JASON TAPE UNIT *jsm/1*

An exclusive Somerset Murray design

- Instantaneous monitoring, adjustable record/replay characteristics, and bias control.
- Distortionless square-wave reproduction between 40 and 18,000 c/s at 15 i. p. s.
- For decks with, or capable of being fitted with 3 heads.
- Controls can be set to C.C.I.R. and N.A.R.T.B. recommendations.
- Self-powered and styled for shelf mounting in conformity with Jason Matching Equipment.
- AN ORIGINAL SOMERSET MURRAY DESIGN EXCLUSIVE TO JASON
- *Advance information sheet on request.*

£37.0.0

THE JASON MOTOR & ELECTRONIC CO. 3-4 (E) GT. CHAPEL ST., OXFORD ST., LONDON W.1. *(Between Oxford Circus & Tottenham Ct. Rd. Stns. Und.)* GER 0273/4

WHY PAY MORE! Visit our SELF SERVICE SURPLUS STORES

INDICATOR UNIT 277

Consisting of one inch C.R. tube type VCR522, 6 valves:—4-EF50, 2-VR92. Incorporates Focus, Brightness, and Gain controls. Size 7 x 10 x 5in. Manufactured by Cossor. Only **65/-.** P. & P. 3/6.

500 MICROAMPS METER. 2in. circular calibrated 0–15 and 0–600 volts. New and unused **17/6.** P. & P. 1/6.

WIRELESS SET No. 19 Mk. II. As described and recommended for Amateur use in April and May issues of "Practical Wireless." This famous Transmitter-Receiver incorporates "A" Set—TX/RX covering 2-8 Mc/s. (37.5-150 metres), "B" Set—VHF TX/RX covering 230-240 Mc/s. (1.2-1.3 metres) and intercom amplifier. Complete with 15 valves 500 micro-amp check and tuning meter, circuits and instruction book (American manufacture). In magnificent condition. **60/-,** carr. 10/-.

Attachments for above:

Supply units	30/-
Variometers	20/-
Headphone and microphone assembly	13/6
Morse key assembly	4/6
12ft. aerial	7/6

RELAYS. 6,500 ohms and 3,500 ohms. 8/- pair, post paid.

GOODMAN OUTPUT TRANSFORMERS. Impedance 5,000 ohms to 3 ohms, 3 watt, suitable for 6V6's, 6BW6, etc., **4/6** each. Post 1/-.

S.T.C. RECTIFIER UNIT. Input 100-250 v. A.C. Output 115 v. D.C. at 1 amp. Provision for adjustment of 3 and 12 volts either side of mean voltage. **55/-,** carr. 5/-.

866A VALVES. New and boxed, **13/6.** P. & P. 1/6.

CONVERTERS. Easily the most useful units released by the Ministry. Within minutes you can extend the frequency of any receiver to cover the following:—R.F. 26 50–65 Mc/s Variable tuning **20/-.** R.F.25 40–50 Mc/s, switched tuning **8/6.** All Brand New with circuit 3/6 postage on each.

POCKET VOLT TEST METER. Two D.C. ranges 0–250 v. and 0–15 v. Complete with test prods. Brand new. Very limited quantity. Only **10/6.** P. & P. 1/6.

LUMINOUS MAGNETIC MARCHING COMPASS. Pocket size. Brand new with instructions. ONLY **12/6.** P. & P. 1/-.

COMMUNICATION RECEIVER RA 1B. Covers 150 kc/s-15 Mc/s. in 6 bands, 12 or 24 operation. S.A.E. for details.

LOUD HAILER SPEAKERS. Sound powered with output transformer, impedance of speech coil 7 ohm, handling capacity 8 watts. Ideal for inter-communication. Complete with carrying strap. Price **20/-.** Packing and carriage 5/-.

COMPLETE HEADPHONE AND MICROPHONE ASSEMBLY. A must for every Constructor and "Ham," consists of moving coil, padded headphones and "press to talk" microphone. **10/-,** P. & P. 3/6.

Simple TWO-WAY TELEPHONE KIT

Install your own intercomm. !!! with this brand new kit consisting of 2 "press to talk" hand telephones, 100ft. of flex and simple wiring details. Complete kit sent for only **25/-** P. & P. 3/6.

Ideal for garage, office, workshop, factory, farm, camping, and home. Will give endless hours of pleasure and has proved reliable under all conditions.

No. 18 TRANSMITTER/RECEIVER

A portable, self-contained Transmitter/Receiver for Telephone and C.W. Range approx. 10 miles. Frequency 6-9 Mc/s. (50-33.3 metres). Valve line-up: 3 ARP-12, 2 AR-8, 1 ATP4. Complete with aerial, H.T. and L.T. meter. Weight 20lb., size 8 x 10 x 17in. Only **60/-.** Carr. 10/-

GELOSO TEST METERS

MODEL AN/20 MICROTESTER is a magnificent 18-range universal multi-test meter. High sensitivity type (5,000 ohms per volt on all ranges) and has accurate linear scales for the lower A.C. voltage ranges. Pocket size and complete with test leads.

Ranges:

0 to 7.5, 10, 50, 250 and 1,000 D.C. 0 to 2.5, 10, 50, 250 and 1,000 A.C. 0 to 1, 100, 1,000 M.A. D.C. 0 to 15 K, 1.5 megohms. 0, +13, +27 Db (0 Db = 6 Mw into 500 ohms).

Brand New £9/9/-. P. & P. 4/-.

MODEL AN/27 TEST METER. An accurate, high sensitivity (5,000 ohms per volt on all ranges), 27-range A.C./D.C. instrument. Housed in a leatherette covered case with tool storage provision, complete with leads.

Ranges:

0 to 2.5, 10, 100, 250, 500 and 2.5 KV D.C. 0 to 2.5, 10, 100, 250, 500, 2.5 KV. A.C. 0 to .25, 2.5, 25, 250, 500 MA D.C. 0 to 1 and 5 amperes D.C. 0 to 2.5 K, 25 K, 250 K and 2.5 megohms. 0, +20, +28, +34 Db (0 Db = 6 Mw into 500 ohms).

Brand New £15/15/-. P. & P. 4/-.

Build a CAR RADIO ! !

BENDIX RECEIVER RA-10

A magnificent 8 valve, 4 waveband receiver covering 150 kc/s to 10 Mc/s.
Valves: 6SK7 R.F., 6K8 mixer, 6SK7 I.F. Amplifiers, 6R7 2nd Det., AVC AF Amplifier, 6C5 B.F.O., 6K6 output. Supplied with full conversion data for 12 v. operation. Only **£5/10/-.** Carr. 10/-.

INFRA-RED MONOCULAR

Ideal for night viewing, etc. Complete with push-button power unit and focus lenses. Brand new in beautiful leather carrying case. Originally cost Govt. £40. OUR PRICE **25/-.** P. & P. 3/6.

WESTON 1 AMP. H.F. METERS. 2in. circular. Brand new, **5/6.** P. & P. 1/-.

COMMUNICATION RECEIVER R1155. This magnificent receiver covers 5 ranges: 75-200 kc/s., 200-500 kc/s., 600-1,500 kc/s., 3-7.5 mc/s., 7.5-18.5 mc/s. Full tested before despatch. Complete with N. Type drive circuit and instruction booklet. **£8/10/-.** carriage 10/-.

AMERICAN MIDGET ACCUMULATORS. 36 volts, lead acid type. **2/6** each. P. & P. 1/-.

R.T.-7/APN-1 ALTIMETER TRANSCEIVER. Brand new complete with 14 valves: 3-12SJ7, 4-12SH7, 2-12H6, 1-VR150, 2-9004, 2-955. Famous Wobbulator Unit, Dynamotor, Relays 3,500 ohms and 6,500 ohms. A.F. amplifier. Receiver section covers 400-450 mc/s. Transmitter sweeps 418 to 462 mc/s. Ideal for model control work, etc. Only **35/-.** Carriage 10/-.

COMMAND RECEIVERS. 190-550 kc/s., fully valved, **55/-.** P. & P. 3/6.

COLVERN WIRE WOUND POTENTIOMETERS. 25 watts 50k and 100k. Price **6/-** each.

ARMOUR RECORDING WIRE. U.S.A. top quality on original reels, length 3,700 yds. **10/-.** P. & P. 1/6.

0-1 MA. METER. 2 inch square flush mounting. Brand new **22/6.** P. & P. 1/6.

HIGH RESISTANCE HEADPHONES. Type No. 2 4,000 ohms., Brand new **11/6** each. P. & P. 1/6.

RCA MAINS TRANSFORMERS. Input 110-240 v. Output 245-0-345 at 150 mA. 6.4 v. at 4.5 amps., and 5 v. at 2 amps. Brand new, fully shrouded. Write now. Only **35/-.** P. & P. 3/-.

AMERICAN GEARED MOTOR 24 v D.C. with built-in precision gearbox. No. 1 drive 24 R.P.M. No. 2 drive 6 R.P.M. On 12 v. No. 1 drive 16 R.P.M. No. 2 drive 4 R.P.M. Overall size of motor and gearbox 7¼ x 3¼ x 3in., weight 1lb. 14 oz. Brand new. **17/6.** P. & P. 3/-.

INDICATOR UNIT SLC No. 5. Ideal for conversion into an Oscilloscope using a 139A or ACR 10 tube. Unit consists of 2-VR65's, 1-VR66, various resistors, condensers and pots. Size 11 x 6 x 3in. Brand new, complete with modification circuit (less tube), **20/-.** P. & P. 3/-.

LEAD ACID ACCUMULATORS (unspillable). 2 volts 16 A.H. Ideal for 6 volts and 12 volts supply. Brand new original cartons. Size 14in. x 7in. x 2in. **5/6** each. P.P. 2/6; 3 for **15/-.** P.P. 3/6; 6 for **27/6.** P.P. 5/-.

Relda Radio Ltd.

87, TOTTENHAM CT. RD., LONDON, W.1.
32A, COPTIC STREET, LONDON, W.C.1.

All post orders and correspondence to
(Dept. "W") 32A, Coptic Street, London, W.C.1. MUSeum 9607

SIGNAL GENERATOR



Coverage 100 Kc/s.-100 Mc/s. on fundamentals and 100 Mc/s to 300 Mc/s. on harmonics. Metal case 10in. × 6½in. × 5½in., grey hammer finish. Incorporating three miniature valves and Metal Rectifier. A.C. Mains 200/250 v. Internal Modulation of 400 c.p.s. to a depth of 30%; Modulated or unmodulated output continuously variable 100 millivolts. C.W. and mod. switch, variable A.F. output. Incorporating magic-eye as output indicator. Accuracy plus or minus 2%.

£6/19/6 Or 25/- deposit and 6 monthly payments of **21/6**. Post & Packing 5/- extra.

SIGNAL GENERATOR

£4/19/6

Or **25**/- deposit and 4 monthly payments **21/6**. P. & P. 5/- extra. Coverage 120 Kc/s.-230 Kc/s., 300 Kc/s.-900 Kc/s., 900 Kc/s.-2.75 Mc/s., 2.75 Mc/s.-8.5 Mc/s., 8 Mc/s.-28 Mc/s., 16 Mc/s.-56 Mc/s., 24 Mc/s.-84 Mc/s. Metal case 10in. × 6¼in. × 4¼in. Size of scale, 6¼in. × 3¼in. 2 valves and rectifier A.C. mains 230-250 v. Internal modulation of 400 c.p.s. to a depth of 30 per cent., modulated or unmodulated R.F., output continuously variable 100 milli-volts, C.W. and mod-switch variable A.F. output and moving coil output meter. Grey hammer finish case and white panel. Accuracy plus or minus 2%



SIGNAL & PATTERN GENERATOR

£6/19/6

P. & P. 5/-.

Or **25**/- deposit, P. & P. 5/- and 6 monthly payments of **21/6**.

Coverage 7.6 Mc/s.-210 Mc/s. in five bands, all on fundamentals, slow motion tuning audio output 8 vertical and horizontal bars, logging scale. In grey hammer finished case with carrying handle. Accuracy ± 1%. A.C. mains 200-250 v.



PORTABLE AMPLIFIER

Size 6½in. long, 5in. high, 2½in. deep. Will suit any type of crystal pick-up. Output approx 2 watts. Incorporating EOC83 double triode, Cossor 142PT output pentode and contact-cooled rectifier. Fully isolated mains transformer for 230/250 A.C. mains. Base, treble and volume controls. **49/6** Plus P. & P. 3/6

5" SPEAKER WITH O.P. TRANSFORMER

purchased with the above **18/6**. Plus P. & P. 1/6

COLLARO MIXER 4-SPEED AUTOMATIC CHANGER

Model 457. Type "O" Pick-up, size 12in. x 13½in. Minimum clearance above baseboard 5in., below 2½in. 10 records. A.C. mains 200/250 v. Turnover crystal head. BRAND NEW. Fully guaranteed (suitable for use with above amplifier). **25**/- deposit plus P. & P. 5/- and 7 monthly payments of **25**/-.

Cash **£8/19/6** Plus P. & P. 5/-.

AC/DC POCKET MULTI-METER KIT

Comprising 2in. moving coil meter, scale calibrated in A.C./D.C. volts, ohms, and milli-amps. Voltage range A.C./D.C. 0-50, 0-100, 0-250, 0-500. Milli-amps. 0-10, 0-100. Ohms range, 0-10,000. Front panel, range switch, wire-wound pot (for ohms zero setting), toggle switch, resistors and meter rectifier. Basic movement 2mA. In grey hammer-finish case.

19/6 Plus P. & P. 1/6. Built and tested 7/6 extra.

Point to point wiring diagram 1/- free with kit.

RADIO AND T.V. COMPONENTS (ACTON) LTD.

23, ACTON HIGH STREET, LONDON, W.3

GOODS NOT DESPATCHED OUTSIDE U.K. ALL ENQUIRIES S.A.E

CONDENSERS

AR38 FILTER PACK. 3 × 4 mfd., 500 v. (new). **25**/- each. P.P. 2/6.

BLOCK PAPER CONDENSERS

0.25 mfd 2 kv. wkg., **2/6** each. 1 mfd., 400 v. wkg., **2/6** each. 1 mfd., 2 kv. wkg., **3/6** each. 3 mfd., 600 v. wkg., **4/-** each. 3 mfd., 400 v. wkg., **4/-** each. 4 mfd., 400 v. wkg. **4/6** each. 4 mfd., 1 kv. wkg., **5/6** each. 6 mfd., 400 v. wkg., **5/6** each. 8 mfd., 1,200 v. wkg., **11/6** each. 0.1 mfd., 4 kv. wkg., **4/6** each. 0.5 mfd., 5 kv. wkg., **7/6** each. 0.5 mfd., 2 kv. wkg., **2/6** each. 1 mfd., 750 v. wkg. **3/-** each. 2 mfd., 400 v. wkg., **3/6** each. 2 mfd., 1.5 kv. wkg., **4/6** each. 3 mfd., 400 v. A.C. wkg., **5/-** each. 4 mfd., 600 v. wkg., **5/-** each. 4 mfd., 2 kv. 2kg., **3/6** each. 8 mfd., 500 v. wkg., **4/9** each. 10 mfd., 440 v. A.C. wkg., **12/6** each. 80 mfd., 300 v. wkg., **27/6** each. 50+50 mfd. 300 v. A.C. wkg., **30/-** each.

CERAMIC TYPES. 50 pf., 100 pf., 110 pf. and 1,000 pf., 10 kv. wkg., **3/6** each. 100 assorted Silver Micas **22/6**. 100 assorted resistors **15/-**.

R.F. UNITS type 26B. Brand new in cartons, **18/6** each. P.P. 2/6.

RECEIVER BC 624C (part of SCR 522). This well-known receiver covers 100 to 156 Mc., the "C" is the latest type which incorporates several mods. over the earlier models, noise limiter, AVC, squelch circuit and extra audio stage. The power requirements are 300 volts 70 m/a. H.T. 12 volts 3 amp L.T. New and complete with 11 valves, **£2/2/6** each. P.P. 3/6.

TRANSMITTERS AMERICAN BC 640A/B. Freq. 100-156 mc/s. Ideal for bams on two metres, complete with all valves and power supply 110-250 v. A.C. input. Mounted in an all steel case including amplifier, driver unit, modulator, control panel, power units, and auto transformer plus Variac 110 or 250 v 7.5 amps. for fine control. Output 100 watts. Complete unit **£30** or units sold separately. Limited quantity available to callers only, by appointment please. Delivered free in London area only.

TRANSMITTER 1131. this is the British version of the above complete unit, less valves. **£17/10/-**.

CRYSTAL MONITOR. Type 4A. 100-120 mc/s., 230 v. A.C. or batt. operated. Valve line up: 2 VR91, 1 VR66, 1 VR67. 1 VU39, 1 CV31 and VR92. As new in transit case, **37/6** each. post 5/-.

TRANSFORMERS. "C" core type. Input 230 v. or 440 v. A.C. Output 725 750 775, 800 v. at 300 mils., and 240, 250, 260, 270 v. at 210 mils. New **35/-** each post 4/-. Input 230 v. or 440 v. A.C. 115 v. at 1 amp., 20, 21, 22 v., at 850 mils., and 115 v. at 1 amp. New, **35/-** each, post 4/-.
Input 200/250 v. output 350-0-350 tapped 250-0-250, at 180 mils., 5 v., 3 amp, 6.3 v. at 0.5 amp., new, **25/6** each, 3/6 post.
Input 230 v A.C., output 6.3 v. 1.7 amp., 6.3 v. at 0.3 amp. New. **10/6** each post 2/-.

KNIFE SWITCHES. 60-amp. change-over, **1**5/6 each, 2/3 post.

STUD SELECTOR SWITCH. 20 pos., panel 5 × 5in., **5/-** each. 1/6 post.

RE-ENTRANT SPEAKERS. 10 ohms, 15 watts, new, **£5/10/-** each.

RE-ENTRANT SPEAKERS. 15 ohms, 20 watts. Not new, good cond., **£4** each.

REOSTATS 25 ohms, 2 amps. (by OHMITE U.S.A.), **17/6** each, post 1/-.

TERMS C.W.O. All goods offered are ex-WD. S.A.E. for enquiries.

W. MILLS

3-B TRULOCK ROAD, TOTTENHAM, N.17

Phone: Tottenham 9213 & 9330

ELECTRONICS HAYWARD TURBINES

OFFER THEIR SERVICES

IN

- Manufacture of Aircraft Electrical Equipment
- Development & manufacture of Electro/Mechanical devices
- Electronic Equipment
- Armature Stator Layer Wave & Toroidial Windings
- Epoxy Resin Encapsulation
- Large or Small Quantities
- Early Deliveries

HAYWARD TURBINE ENG. CO. LTD.

ELECTRONICS DIVISION (AMERSHAM 2101)

CHILTERN AVENUE, AMERSHAM, BUCKS.

HEAVY DUTY VICE MODELS WITH BEVELLED FORMER BARS

PARKER'S SHEET METAL FOLDING MACHINES



Carriage free

No. 1 Cap. 18 ga. mild steel x 36in. wide...	**£7**	**10**	**0**
No. 2 Cap. 18 ga. mild steel x 24in. wide ...	**£5**	**5**	**0**
No. 3 Cap. 16 ga. mild steel x 18in. wide...	**£5**	**5**	**0**

Form Angles, Channels. End folding attachments for Radio Chassis, Tray and Box making. For 36in. model, 3/6 per ft., other models 2/-. The two smaller models will form flanges.

One year's guarantee. Send for details.

A. B. PARKER, Wheatcroft Works

Wellington Street, Batley, Yorks. **Tel. 426**

Visit the City's new acoustically designed

HI-FI Centre

AMPLIFIERS BY :

VERDIK	GOODSELL
ARMSTRONG	QUAD
ROGERS	LEAK
DULCI	W.B., etc.

AUTO-CHANGERS
BRAND NEW OFFER!

COLLARO 4-SPEED AUTO-CHANGERS

Incorporating auto and manual control. Complete with Studio crystal p.u. and sapphire stylus.

Our price Plus 5/– post. **£7-19-6**

NEW COLLARO 457 AUTOCHANGER mixer, with studio t/o cartridge. **£8/19/6,** plus 5/- post and packing.

B.S.R. 4-speed Model T.U.8. Autochanger, plays 7in., 10in. and 12in. mixed records. Crystal T/O pick-up. **£7/19/6.** (Plus 5/– post and ins.)

SPECIAL CASH OFFER

4-SPEED COLLARO

4/546 single player with Studio t/over pick-up. Limited number only. Our price **£6/19/6.** (Plus 5/– post and ins.)

COLLARO JNR. 4-speed motor and t/table with Acos crystal t/over cartridge. Our price £4/10/- complete. 3/6 post and ins.

GRAM. MOTOR AND T/TABLE only at £3/2/6. Post and ins. 2/6.

NOW IN STOCK. Collaro 4-speed transcription turntable and pick-up. **£19/10/-.** Post and packing 7/6.

THE NEW B.S.R. 4-SPEED TU9 record player using the new B.S.R. ful-Fi crystal cartridge. Our price **£4/12/6.** (Plus 4/– post and ins.)

GARRARD 4-SPEED SINGLE PLAYER UNIT with GC2 t/over cartridge for 78 and L.P. records. Our price **£7/10/-.** 4/6 post and ins.

PICK-UP SNIP

Featherweight pick-up with HGP 59/1 t/over cartridge and pick-up rest..... **32/6**
Plus 1/6 post and ins.

TAPE DECKS. The latest "Collaro" Tape transcriptor Mk. II with digital counter. **£22.** Carriage 12/6.

The new Lane deck **£18/10/-,** plus 12/6 carriage.

The new Brenell deck **£23/2/-,** plus 12/6 carriage.

TUNER UNITS
AM/FM CHASSIS
RADIOGRAM CHASSIS
BY LEADING MAKERS

SPECIAL OFFERS TO TRANSISTOR CONSTRUCTORS. New range of sub-miniature capacitors by well-known manufacturer. All at **2/9** each.
1 μf 18 v. 1.6 μf 6 v. 2.5 μf 6 v. 5 μf 12.5 v. 8 μf 6 v. 16 μf 12.5 v. 25 μf 6 v. 32 μf 3 v. 25μf 25 v. 80 μf 6 v.

TRANSISTORS. Junction type PNP. Red-spot audio freq. Blue-spot mixer and frequency changer. White-spot.

All TELETRON and REPANCO transistor components in stock.

SENSITIVE GERMANIUM DIODES. 3 for **2/6.** New GD3 diodes **2/6** each. Mullard OA71 diodes **6/-.** Postage 6d.

THIS MONTH'S SNIP

LIMITED QUANTITY OF 9in. and 12in. MAGNETIC T.V. TUBES. BRAND NEW AND BOXED BY FAMOUS MAKER.

SPECIFICATION 12in. TUBE
Flat face, white fluorescence triode, 2 v. heater, 1.5 A heater current, anode voltage 10 kv. OUR PRICE **£8/19/6** including mask.
9in. TUBE. Round face, white fluorescence, 4 v. heater, 1 a. heater current, max. anode voltage 7 kv. OUR PRICE **£5/17/6.**

SUB-MINIATURE POTS. 2 k. 40 k., 100 k., 330 k., ½ meg., 1 meg. BRAND NEW. 2/- each.

New semi-midget HiQ 475 kc/s IF transformers, dust core tuning, by well-known maker. **5/6** pair, post 1/–.

EXTRA SPECIAL OFFERS in SPEAKERS
12in. Plessey P.M. speaker, 3 ohm speech coil. **32/6** plus 2/6 post and ins.
10in. Rola P.M. speaker, 3 ohm speech coil, Astounding value, only **24/6,** plus 2/6 post and ins.
4½in. Plessy P.M. speaker, 3 ohm speech coil, **14/9** plus 1/6 post.
2½in. **ROUND SPEAKER.** 1½in. deep **16/6** plus 1/-.

THE IDEAL AMPLIFIER for your portable record player, 2 valve printed circuit, 3 watt output, using Mullard U785 and UCL83. Completely assembled. **52/6.** Plus 2/6 post and packing.

Brand New 5-valve RADIOGRAM CHASSIS complete with valves



Superhet with long, medium and short wave bands. Pick-up and ex. speaker sockets. Our price **£9/10/-.** Plus 7/6 post and ins.

A COMPREHENSIVE RANGE of Hi-Fi speakers by **Goodmans, Wharfedale, W.B., G.E.C., Lorenz,** etc. Tweeter units by **Goodmans, Wharfedale, T.S.L., Elac,** etc.

1958 AM/FM RADIOGRAM CHASSIS



Eight-valve AM/FM chassis with printed circuit FM tuner section. Illuminated dial in 4 colours; 4 waveband; coverage 1,000–2,000 metres, 200–550 metres, 15–50 metres, 88–100 Mc/s. Dimensions 13×9×6in. Fully guaranteed. Exceptional value—only **19 gns.,** plus 7/6 post and ins.

New .0005 miniature two-gang condenser by famous manufacturer. ⅜in. spindle. Only **6/9.** Plus 1/– post.

.0005 single gang tuning condenser. **4/9,** postage 1/–.

CONDENSER SNIPS

New Sprague .05μF, 500V, **9d.** each. .25μF, 350V, **1/3** each. .1μF, 800V, **1/6** each, sleeved **15/–** doz.; B.E.C. 250μF, 12V, 50μF×50μF, 250V, **3/3** each.

BRAND NEW 0-1 AMP. 12in. SCALE R.F. METER
Thermo couple **5/-;** 0–300V A.C., 2½in. scale, moving iron meter, **25/-.** Post 2/6.

0–1 M/amp meter, m/c flush mounting		**17**	**6**
0–100 amps 50 cps., 4½in. meter.....	**£2**	**10**	**0**
0–50 amps moving iron 6in. meter.....	**£3**	**10**	**0**

All brand new and boxed. Post and ins. 1/6.

ANOTHER SNIP OFFER

This well constructed portable amplifier cabinet in 2-tone colour with 3 watt A.C. amplifier, 6½in. P.M. speaker, output transformer, the four items for only **£8/5/-.** Post and packing 7/6. Cabinet will house most makes of autochangers. Cabinet only **72/6.** Post and packing 5/–.

50 Assorted Resistors, Ceramic, S/Mica and Tubular Condensers. **7/6.**
25 Assorted Tag Strips, from 2-way to 7-way. **3/6.**
24 Standard 1¼ Fuses, 1 a., 2 a., 3 a., 5 a., 10 a. **5/6.**
Nylon Drive Cord, 6 yards. **2/6.**
12 Assorted Volume Controls, popular values. Carbon W/Wound and Presets. Only **10/6.** All brand new, 36 assorted B7G, B9A, B8A and 1/Octal **Valveholders. 15/-.**
Tygan Speaker Covering in attractive designs. **3/6** per sq. ft. Cut to your own size.

H.P. facilities available to personal shoppers.

Electronics (FLEET ST.) Ltd

Dept. B,
152/3 FLEET ST., LONDON, E.C.4.
Telephone: FLE 2833
Business hours: weekdays 9-6, Saturdays 9-1.

TRS OFFER THE BEST FOR YOUR MONEY!

MULLARD "3–3" QUALITY AMPLIFIER



An ideal companion unit to the JASON Tuner. A really first-class 3-valve 3-watt Amplifier giving Hi-Fi quality at a reasonable cost. Mullard's latest circuit. Valve line-up: EF86, EL84, EZ80. H/duty mains trans. giving extra HT and LT for Tuner Unit addition.

Variable treble cut and bass boost controls, sensitivity 100 MV for 3-watt output. Frequency response + or − 1db, 40 c/s to 25 kc/s.

Complete amplifier wired and tested with quality sectionalised output transformer to Mullard specification

(less speaker) £3.8.0
Carr. and ins. 4/6.

Wired Power O/Put Socket with Additional Smoothing for F.M. Tuner 10/6 extra.

JASON F.M. TUNER UNIT 87-105 mc/s

Designer Approved Kit of parts to build this modern highly successful unit, drilled chassis and superior type dial. Coils, cans and all quality components, etc., for only 5 gns., post free. Set of 4 spec. EF91 or equiv. valves 30/-, post free. Illustrated handbook with full details, 2/-, post free—Free with Kit. 48-hr. Alignment Service 7/6 and 2/- p. & p. AND NOW—Jason "Mercury" Switched F.M. Tuner, with A.F.C. Complete kit only 8½ gns., plus 2/6 p. & p. Set of 3 × E.F.80 valves, Special price 21/-.

ELECTROLYTICS ALL TYPES NEW STOCK

TUBULAR

25/25v., 50/12v. 1/9
50/50 v. 4/500v. 2/-
100/250 v. 1/9
8/450 v. 2/3
8/500 v. 2/9
8+8/500 v. .. 4/6
8+16/450 v. .. 5/-
16/450 v. 3/6
16+16/450 v. 5/6
32/350 v. 4/-
32/500 v. 5/-
32+32/350 v. 5/6
32+32/450 v. 6/6

CAN TYPES

8+8/450 v. .. 4/6
8+16/450 v. .. 5/-
8+16/500 v. .. 5/6
16+16/450 v. 5/6
32+32/350 v. 5/6
32+32/275 v. 4/6
50+50/350 v. 6/6
60/350 v. 6/6
60+250/275v. 12/6
64+120/275v. 11/6
100+200/275v. 12/6
100/270 v. 6/6

MIDGET TRANSISTOR TYPES. 2μF 4μF, 8μF, 6v. 3/6; 6μF, 10μF, 16μF, 3v., 3/6; 32μF, 1½v., 3/6.

CONDENSERS.—Silver Mica. All pref. values, 2 pf. to 1,000 pf. 6d. each. Ditto ceramics 9d. each. Tubular 450 v. T.C.C., etc., .001 mfd.-.01 and .1/350 v., 9d. each. 02-1/500 v. 1/- each. .25 Hunts, 1/6. 5 T.C.C., 1/9. .001 6kv. 5/6. .001 20kv. 9/6.

CLOSE TOLERANCE CONDENSERS 5/Mica. 10% Type. 5pf.—500 pf., each 1/-; 600 pf.—5,000 pf., each 1/3. 1% Type, 1.5 pf.—50 pf. (Tol. 1 pf.), 1/9; 56 pf.—500 pf. each 1/9; 575 pf.—5,000 pf., each 2/-.

RESISTORS.—Pref. val. 10 ohms 10M ohms.

CARBON

20% Type, ½ w., 3d.; ¼ w., 5d.; 1 w., 6d.; 6 w., 9d.
10% Type, ½ w., 9d.; 1 w., 1/-;
5% Type, ½ w., 1/-;
1% Hi-Stab, ½w. 2/-

WIRE-WOUND POTS

Pre-set Min. T.V. Type Knurled Slotted Knob. All values 25 ohms to 20 K., 3/- ea., 50 K. 4/-. Ditto, Carbon Track, 50 K., to 2 Meg., 3/-.

WIRE-WOUND

5 w.) 25 ohms—1/3
10 w.) 10,000 1/6
15 w.) ohms 2/-
5 w.) 15,000— 1/9
) 33,000
10 w.) ohms 2/3

3 w. LAB. COLVERN, etc. Standard Size Pots 2¼in. Spindle. High Grade. All Values, 100 ohms to 50 K., 5/6; 100 K., 6/6.

W/W EXT. SPEAKER CONTROL, 10Ω. 3/-.

SPEAKER FRET.—Expanded Bronze anodised metal 8 × 8in., 2/3; 12 × 8in., 3/-; 12 × 12in., 4/6; 12 × 16in., 6/-; 24 × 12in. 9/- etc. Preferred sizes only.

RECTIFIERS. E.H.T. Type Fly-Back Voltages. K3/25 2 kV., 5/-; K3/40 3.2 kV. 6/9; K3/45 3.6 kV. 7/3; K3/50 4 kV., 7/9; K3/100 8 kV 13/6. etc. **MAINS TYPES.**—RM1 125 v. 60 mA., 4/9; RM2 125 v. 100 mA. 5/6; RM3 125 v. 120 mA., 7/6; RM4 250 v. 250 mA., 16/-; RM4B type 270 mA. 17/6; RM5 250 v. 300 mA., 21/-.

TYGAN FRET (Murphy pattern). 12in × 12in., 2/-; 12×18in., 3/-; 12×24in., 4/-, etc.

NEW BOXED VALVES ALL GUARANTEED

1R5,1T4 7/6	EABC80 9/6	EZ81 8/6	
185, 184 7/6	EB91 6/6	MU14 9/6	
384 3V4 8/-	EBC41 9/6	PCC84 10/6	
5Z4 9/6	ECC83 10/6	PCF80 10/6	
6AT6 8/6	ECC84 12/6	PCF82 10/6	
6K7 6/6	ECF80 12/6	PCL83 12/6	
6K8 8/6	ECF82 12/6	PL82 10/-	
6Q7 8/6	ECH42 10/6	PL83 11/6	
6SN7 8/6	ECH81 10/6	PY80 9/6	
6V6 7/6	ECL80 10/6	PY81 9/6	
6X4 7/6	EF41 10/6	PY82 8/6	
6X5 7/6	EF80 10/6	PY83 10/6	
7C5 9/-	EF86 12/6	U22 8/6	
7Y4 8/6	EF91 8/6	U25 12/6	
DAF96 9/-	EL41 10/6	UBC41 9/6	
DF96 9/-	EL84 11/6	UCH42 10/6	
DK96 9/-	EY51 12/6	UF41 10/-	
DL96 9/-	EY86 14/6	UL41 10/6	
35L6 10/6	EZ40 8/6	UY41 8/6	

SPECIAL PRICE PER SET

1R5, 1T4, 185, 184 or 384 or 3V4 27/6
DK96, DF96, DAF96, DL96 .... 35/-
6K8, 6K7, 6Q7, 6V6 5Z4 or 6X5 35/-

Vol.Controls

Log ratios, 10,000 ohms—2 Megohms. Long spindles, 1 yr. guarantee. Midget Ediswan type, 1¼in. dia.
No. Sw. 3/-; S.P. Sw., 4/-. D.P. Sw., 4/9. Linear Ratio, 10,000ohms—2Meg-ohms. Less switch, 3/- each. **Coax plugs** 1/-. **Coax sockets,** 1/-. **Couplers** 1/3. **Outlet Boxes, 4/6.**

80 ohm CABLE COAX

STANDARD ⅛in. diam. Polythene insulated GRADE "A" ONLY.

8d. yd.

SPECIAL—Semi-air spaced polythene. 80 ohms **Coax,** ⅛in. dia. Standard core. Losses cut 50% **9d. yd.**

IDEAL BAND 3

MAINS TRANSFORMERS.—Made in our own Workshops to Top Grade spec. Fully interleaved and Impregnated. **RADIO AND AMPLIFIER TYPE.**—250 v., 60 mA F.W. sec. 5 v. or 6.3 v. 1 a., rect. 6.3 v. 2.5 a. set Htrs., 22/6, etc., **C.R.T., HTR. ISOLATION TYPE.**—Low leakage with or without 25% sec. boost voltage. Ratio 1:1 or 1.25, 2 v., 10/6; 4 v. 10/6; 6.3 v., 10/6; 13.3 v., 10/6. Ditto with mains primaries 200/250 v., 12/6.

SPECIAL TRANS.—Wound to your requirements.

LOUDSPEAKER.—P.M. 3 ohms 2¾in. Elac, 17/6; 3¾in. Goodmans 18/6; 5in Rola 16/6; 6in. Elac 18/6; 7×4 in. Goodmans Elliptical 18/6; 8in. Rola 20/-; 10in. B. and A., 25/-; 10in. WB-Hi-Fi 1012, 99/9; 12in Plessey 15 ohm with 6×4in. Tweeter and Cross Over Filter, 97/6.

ONLY A FEW ITEMS ARE LISTED FROM OUR COMPREHENSIVE STOCK.

RADIO COMPONENT SPECIALISTS

TRS 70 BRIGSTOCK RD., THORNTON HEATH, SURREY

Phone: THO 2188. Hours 9 a.m.—6 p.m., 1 p.m. Wed. Open all day Saturday. By Thornton Heath Station.

Terms C.W.O. or C.O.D., Kindly make cheques, P.O.s., etc., payable to T.R.S. Post and Packing up to 1lb. 7d., 1lb. 1/1, 3lb. 1/6, 5lb. 2/-, 10lb. 2/9. Bargain Lists 3d.

MIDLAND INSTRUMENT CO.

MAINS BLOWER. 200/250 v. A.C./D.C., ¼ amp., 5,000 r.p.m., consists of the motor with attached enclosed fan, and funnel intake 1¼in. dia., side outlet 1in. × ¾in., plinth base 5in. × 4½in., finish black crackle and diecast aluminium; size overall 9in. long, 4¼in. wide, 5in. high, weight 7¼lb., a very superior blower, offered at a fraction of original cost, new, unused, 25/-, post 3/6.

ELECTRIC PUMPS suitable for most liquids, the popular cylindric immersible type, 24-v., at which they deliver 10-g.p.m. at 20ft. head, also give excellent performance at 12-v., new in sealed cartons 1ft. long 30/-, post 2/3; ditto 4ft. long 35/-, carriage 5/-.

HUGHES MOTOR, shunt wound, 12-v. 1½-amp., speed 5,000 r.p.m., reversing, size 3¼in. long, 1¾in. dia., ¼in. shaft, weight 20 oz., a very superior motor designed for anti-radar equipment, new, unused, 10/-, post 1/6, £5 per doz., carriage paid, ditto fitted reduction gear, giving a final drive (¼in. shaft) of either 320 or 160 r.p.m., state which required, 12/6, post 1/9; £6 per doz., carriage paid.



LOUDSPEAKERS by Pye, Philips, etc., consists of the 10in. dia. P.M. speaker, 3 ohm coil, less transformer, fitted in a smart brown finished wood case, size 17 × 17 × 6¼in., with carrying handle, metal grille at front with 4 smaller ones at rear, rear compartment contains 50ft. superior twin lead fitted standard jackplug, new in sealed cartons, special bargain offer, 37/6, carr. 100-m. 6/-, 200-m. 8/6, 300-m. 11/-. C.I., N.I. and I.O.M. 15/-.

BARR & STROUD RANGEFINDERS, 1-metre base, coincidence type, a hand-held instrument that gives range in yards of any distant object from 500 to 20,000 yards (12 miles). The variable focus 14× right eyepiece provides two images of the object viewed; one from the right objective the other from the left. When these two images are brought into coincidence the range in yards can immediately be read in the left eyepiece. Fitted two filters and other refinements. A very high-quality instrument, original cost £180, our price new or near new condition, supplied in stout fibre containers £5, carriage 100-m. 7/6, 200-m. 10/-, 300-m. 12/6, N.I. 20/-.

CHASSIS. U.S. manufacture all aluminium, 12½ × 8 × 5½in. complete with top cover, some items have been removed, remaining are:—25 Amphenol midget ceramic B7G type v/holders, complete with cans, over 70 colour coded 5% resistors, also many ceramicons and other conds., trimmers, padders, fixed and variable inductances, transformer, v/control, etc., new, unused, bargain, 10/-, post 3/6.

PROJECTION UNITS, consists of an optical mount with a 40-mm. f/2.2 achromat 3½in. focal length at one end, a concave/convex ground glass forming a graticule at the other, in line with the enclosed lamphouse, fitted 12-w. 24-v. lamp and polished reflector, in perfect condition, 12/6, post 1/6.

SHADED POLE MOTORS, 12-v., 50-cycles A.C., size 3 × 2 × 1¼in., with 3in. fan, for lamphouse cooling, very silent running, unused and perfect, 10/-, post 1/6, ditto less fan, 8/6, post 1/6.

ROMEC VACUUM PUMPS, rotary vane, size less shaft 5½in. long, 4in. dia., splined shaft 2in. long, ¼in. dia., inlet and outlet ports, also suitable as compressor, new, unused, 22/6, post 2/9.

ELBOW TELESCOPES by Cooke Troughton & Simms, 8× magnification, via the very high quality variable focus orthoscopic eyepiece, the image erecting roof prism and the 50-mm. objective, definition not excelled by any other instrument is obtained, length 11in., 6lb., value £30, our price, new, unused, 60/-, post 3/-.

MOTOR GENERATORS, 4in. long, 2¼in. dia., weight 5lb., totally enclosed, black crackle finish, input 27-v., 1.5-amps., output 285-v., 60-m/A., from 12-v., output is approx. 130-v. at 46-m/A., ideal for operating electric razors from 12-v. car battery, new, unused, 12/6, post 2/-.

Many other Bargains; send stamped addressed envelope for lists.

MIDLAND INSTRUMENT CO., MOORPOOL CIRCLE, BIRMINGHAM, 17

Tel.: HAR 1308

JUST RELEASED!



THE POLONAISE

HI - FI Equipment Cabinet

Intelligently designed, tastefully styled, immaculately finished and sensibly priced, here is a new addition to the celebrated range of RECORD HOUSING Hi-Fi Furniture. Under its twin lids it will accommodate:

1. Every turntable (including transcription and autochange), *plus*
2. Every amplifier and pre-amp, *plus*
3. Every radio tuner, *plus*
4. Almost every tape deck.

Dimensions (overall) 43in. wide; 18in. deep; 19in. high, plus 9in. legs.

Retail Price: 19 guineas (tax paid).

Kindly write for details of full range and nearest stockist to :-

RECORD HOUSING Dept. WW86, Brook Rd., London, N.22 Phone BOWes Park 7487/8

BERRY'S RADIO

1958 40-PAGE FULLY ILLUSTRATED CATALOGUE

6d POST FREE

OF THE NEWEST

ELECTRONIC & HI-FI EQUIPMENT

25, HIGH HOLBORN, LONDON, W.C.I. HOL 6231/2.

TECHNICAL TRADING CO.

4-SPEED CHANGERS

STAAR GALAXY AUTOCHANGERS. LIGHT-WEIGHT DUAL SAPPHIRE TURNOVER P.U. A.C. 200/250 V. £3.19.6

(LISTED £12/16/-). (Post 3/-). THIS YEAR'S BARGAIN

4-SPEED PLAYERS as above but mounted on case as illustrated, £5/15/-.

4-SPEED PLAYERS. Above Changer, 3 Valve Amplifier, 7in. speaker in two-tone Portable Attache Case (worth £20). 13 GNS.

GALAXY SPARES. Motors 200/250 VAC, 12/6. Rubber idler wheels, 4/6. Power point cartridges, 12/6. Sonotone cartridges, 19/6. Etc., etc. Enquiries welcomed.

TRANSISTORS RED SPOT (up to 800 Kc/s) Guaranteed 7/-
BLUE SPOT (up to 1.6 Mc/s.) Guaranteed.... 10/-
WHITE SPOT (up to 2.5 Mc/s.) Guaranteed 14/-

GUARANTEED T.V. TUBES

(EX EQUIPMENT)

12in. (MW31-74, 3/31, etc.).....	£5	5	0
14in. (MW36-24, 4/14, etc.).....	£4	10	0
17in. (MW43-64, 4/15, etc.).....	£6	10	0
17in. (CRM171 only).....	£6	0	0

(All guaranteed 6 months) (carr. & ins. 12/6).

GUARANTEED RADIO VALVES, BOXED, 24-HOUR SERVICE

5U4G	6/6	6L6G	8/-	12Q7GT	7/6	ECC84	10/6	PEN45	15/-
5Z4	9/-	6L7	6/-	25L6GT	8/6	ECC85	9/-	PCC84	9/-
6AC7	5/6	6SA7M	7/-	25Z5	9/6	ECF80	12/-	PCC85	11/6
6AS	9/-	6SG7M	5/6	35Z4GT	7/6	ECL80	13/6	PCF80	12/6
6AL5	5/6	6SJ7M	7/6	41	9/6	EF36	4/-	PEN25	5/-
6AM6	6/6	6SK7GT	5/-	42	9/6	EF37	7/-	PL81	13/6
6BA6	6/6	6SN7GT	5/9	43	9/6	EF37A	8/-	PL82	9/-
6BE6	8/6	6U4GT	12/6	80	7/6	EF39	5/-	PL83	11/-
6C4	4/9	6V6G	6/-	83	7/6	EF50(BR)	3/6	PH12M	5/6
6C6	4/6	6V6GT	7/-	807(BR)	3/9	EF50(AM)	4/9	PY80	8/-
6D6	4/6	6V6M	7/-	807(AM)	5/6	EF80	11/-	PY81	8/6
6H6	2/-	6X4	6/-	EA50	1/6	EF85	7/-	PY82	8/6
6J5M	5/-	6X5GT	5/-	EB34	1/6	EF89	9/6	8P4B	9/6
6J5GT	4/6	7B7	7/6	EB91	5/6	EF91	6/6	8P13C	11/-
6J5G	3/-	6C6	7/6	EBC33	7/-	EF95	8/6	8P41	2/6
6J6	4/6	12A7M	8/6	EC52	5/-	EL32	4/6	8P61	2/6
6J7G	5/-	12AT7	8/-	ECC31	9/6	EZ80	7/6	TDD4	15/-
6K7G	4/6	12AU7	6/6	ECC81	8/-	HVR2A	5/-	TH41	12/6
6K7M	6/-	12AX7	8/6	ECC82	6/6	KT44	12/6	U22	7/6
6K8G	7/6	12K7GT	6/6	ECC83	8/6	KTW63	6/-	U52	6/6
								VP41	9/6

SEND S.A.E. FOR SPECIAL LIST 500 ITEMS

All items less 5% and post free for a dozen or more.
Postage 1/- in £1 (1/9 in £1 8peakers/Trans.). Min. 6d. No. C.O.D.
100 TELEVISION SET BARGAINS TO CALLERS AT:—

350/352, FRATTON ROAD, PORTSMOUTH



BE TRANSISTORWISE

and build these fine transistor kits

"RECO" TRANSISTOR ONE WITH HANDSOME LOOKING CHROMIUM PLATED TELESCOPIC AERIAL, Vari Q ferrite rod aerial, coil, personal phone, etc. Case size and layout now as "Reco" Two. Complete kit 37/6, p.p. 1/9. Pictorial wiring diagram, etc., 1/-.

"RECO" TRANSISTOR TWO

An amazing receiver which on test (50 miles from London) received Continental stations with only a few yards of aerial wire. The Home and the Third were received on built-in Vari Q ferrite aerial. All parts and plastic case, 1¾in. × 4¼in. × 4½in., 49/6. Personal phone free with kit or balanced armature output unit 4/6 extra. P.P. 2/3. Pictorial wiring diagram, parts price lists, etc., 1/-.

"RECO" SPECIAL TRANSISTOR THREE

This fine receiver has now been greatly improved with the addition of a handsome looking chromium plated telescopic aerial 11¼in. closed, 48in. extended. Has sensitivity control and High Q Frame Aerial. Complete kit with choice of "Sonotone" miniature earphone or balanced armature output unit which, in areas of reasonable signal reception, can be mounted inside case. Case size 6¾in. × 4¾in. × 1¾in. with red plastic ornamental unit cover. 77/6. Less telescopic aerial and with balanced armature output unit 65/-. Pictorial wiring diagram, parts price list, etc., 1/3.

"RECO" MIDDY TRANSISTOR THREE

Small in size big in performance. Ideal for invalids. Take it on holiday. Vest pocket size 4¼in. × 3¼in. × 1in. In areas of reasonable signal reception receives local stations on built-in ferrite rod Vari Q aerial. Covers 180 to 500 metres and 40 to 80 metres approx. Complete with three transistors and pencell. Price including "Sonotone" miniature earphone with moulded ear insert, lead and 2-pin plug. 65/-. Pictorial wiring diagram, parts price list, etc., 1/3.

Overseas orders. Carr. 10/- extra.

RADIO EXCHANGE CO., Dept, W.W.
27A, Harpur Street · BEDFORD

RADIO TRADERS LTD.

23 WARDOUR ST., LONDON, W.1. (Coventry Street end)

Phone No.: GERard 3977/8 ***Grams: "Radiotrade"***

STOCKISTS OF CARR FASTENER COMPONENTS

SPECIAL OFFER OF CURRENT MANUFACTURE ELECTROLYTIC CONDENSERS (tubular wire end P.V.C. sheathed). 8 mfd. 450 v., 2/6 each; 16 mfd. 450 v. 3/-; 32 mfd. 450 v. 4/-; 8 x 8 mfd. 450 v. 3/9; 8 x 16 mfd. 450 v. 4/-; 16 x 16 mfd. 450 v. 4/6; 32 x 32 mfd. 350 v. 5/-.

BIAS CONDENSERS. 2,500 mfd. 3 v. 3/6; 250 mfd. 25 v. 2/-; 100 mfd. 25 v. 1/6; 50 mfd. 12 v. 1/6; 25 mfd. 25 v. 1/6.

ELECTROLYTIC CONDENSERS. Manufacturers' Surplus, in perfect condition. 100 mfd. x 200 mfd. 350 v. surge 5/6 each; 100 mfd. x 100 mfd. 425 v. surge 5/6 each; 150 mfd. 450 v. wkg. 5/6 each.

TRANSISTORS: Junction type Red Spot by well-known manufacturers 10/- each.

TRANSISTOR CONDENSERS: Miniature Electrolytic Capacitors 32 mfd. 3 v., 25 mfd. 25 v., 25 mfd. 6 v., 16 mfd. 12 v., 8 mfd. 6 v., 5 mfd. 12 v., 2.5 mfd. 25 v., 1 6 mfd. 6 v., 1 mfd. 12 v. All these types of condensers are 3/6 each. SPECIAL DISCOUNTS FOR QUANTITIES.

AIR-SPACED TRIMMERS, 5, 10, 15, 20, 25, 50 and 75 of pre-set and spindle types 2/- each ..... doz. 21/-

MIDGET MICA CONDENSERS. .0001, .0002, .0003, .0004, .0005 5/- per dozen.

200 Assorted Moulded Mica Condensers, popular value	£2	10	0
200 Assorted Silver Mica Condensers, popular values	£2	10	0
200 Assorted Carbon Resistors, ½, ¼ and 1 watt. Good selection	£1	10	0

PAXOLIN SHEET. 18 x 4½ x 1/16in. 1/6; 10 x 10 x 1/32in. 1/6; 20 x 10 x 1/32in 3/-; 10 x 10 x 1/16in. 2/-; 20 x 10 x 1/16in. 4/-. Minimum P. & Pkg. 1/6.

MANUFACTURERS PLEASE NOTE. We hold large stocks of Nitrogol, Visconol and other block-type Condensers, your enquiries are invited.

W.W. RESISTORS. 5 watt 1/6; 10 watt 2/6; 15 watt 3/-; 20 watt 3/6. We carry stocks of resistors from 2 watts to 150 watts W.W. Your enquiries invited.

HIGH STABILITY RESISTORS. ½ watt 5% 6d.; ¼ watt 5% 9d; 1 watt 5% 1/-. A few values in 1% and 2% still available. ALL ORDERS FOR RESISTORS C.O.D. PLEASE, AS WE CANNOT GUARANTEE TO STOCK ALL VALUES.

GROMMETS. 1 gross Assorted ¼in. to 1in. 8/6

WESTECTORS. WX6, WX12, W4, 1/- each..... per doz. 9/-

SIGNAL LAMP HOLDERS. Panel mounting, complete with Adjustable Lamp Holder 2/- each ..... per doz. 21/-

FUSEHOLDERS. B/Lee L.356 single hole 2/6 each; B/Lee L.1033/C4 double pole 3/6 each. SPECIAL PRICES FOR BULK QUANTITIES.

BARGAIN OFFER OF BATTERIES

4½ v. Heavy Duty Bell, bty. size 6½ x 4½ x 2½in.....	2/6+1/9 P.P.
72 v. H.T. 1.5 v. L.T., 6 x 5 x 1¾in.	2/6+1/9 P.P.
60 v. H.T. 1.5 v. L.T., 3½ x 3¾ x 1¾in.....	4/6+1/6 P.P.

All batteries are sealed, unused, and are tested prior to despatch.

WEARITE COILS. PA4, PO4, PA5, PO5, 1/3 each..... per doz. 12/-

4-WAY PUSH BUTTON UNITS. 2/6 each. Knobs for same, 3d. each.

POINTER KNOBS. Small black with white line 7/6 per doz., Small white with black line 8/- per doz. Both types ¼in. spindle. Large price reductions for 1,000 lots and over.

VALVE HOLDERS. Moulded B9A 7/6; B7G 6/-; Int. Oct. 9/-; Eng. Oct. 4/6. Valve holders fitted with lower can 1/6 per doz. extra.

SCREENING CANS for B7G and B9A 6/- per doz.

CO-AXIAL PLUGS, SOCKETS AND CONNECTORS
PYE TYPE. 10H/3911, 1/6 each; 10H/701, 1/6; 10H/628, 1/6; "Tee" con. 2/-. F. & E. Type: LS-1-PF, 2/- each; JP-1-250 c c.t. 2/-; JS-1-BHF, 4/6; PL259 DE, 4/6. LARGE QUANTITIES AVAILABLE. SPECIAL PRICES FOR 100 and 1,000 lots.

JONES PLUGS AND SOCKETS. 4 pin 2/6 pair; 6 pin 3/6 per pair; 8 pin 4/6 per pair; 12 pin 6/6 per pair If cover required send 1/6 extra per cover.

WANDER PLUGS. Red and black ..... doz. 2/-

PHILIPS TRIMMER TOOLS 1/- each ..... doz. 10/6

CASH WITH ORDER OR C.O.D. ALL ORDERS DEPT. W.I.

ALL ORDERS FOR LESS THAN £2 ADD POSTAGE.

We invite your enquiries for items not listed

Trade Counter open 9 to 6 Monday to Friday.

Also 9 to 1 Saturdays. Callers welcomed.

WHOLESALE MANUFACTURERS AND EXPORT ENQUIRIES INVITED

RELAYS P.O. TYPE 3000.



BUILT TO YOUR SPECIFICATION
QUICK DELIVERY KEEN PRICES
CONTACTS UP TO 8 CHANGEOVER

MINIATURE RELAYS

Siemens High Speed. Sealed
2.2Ω+ 2.2Ω 1 C O H96A **17/6**
1700Ω+ 1700Ω 1 C O H96E **25/-**
S.T.C. Sealed
700Ω 1 make heavy duty 4186ED **19/6**
700Ω 2 Change Over 4184GD **19/6**
2700Ω 2 Change Over 4184GE **22/6**
G.E.C. Sealed
670Ω 2 make 2 break SM5H12 **25/-**
2500Ω 1 Change Over SM5N18 **25/-**

T M.C. Carpenter Relays
330Ω+1040Ω 4B21 **75/-**
850Ω+2680Ω 5M32A **45/-**
300Ω+ 700Ω 5XA24 **45/-**
All available from stock

KEY SWITCHES

PROMPT DELIVERY ALL TYPES UP TO 4co/6co



NIFE BATTERIES. Practically indestructible. 1.2 volts 75 amp. Alkaline filled. Any voltage can be built up. Brand New. **25/-** each. Cge. 5/-.

METERS GUARANTEED

F.S.D.	Size	Type	Price
50 Microamps	2½in.	MC/FR	70/-
100 ,,	2½in.	MC/FR	59/-
250 ,,	3½in.	MC/FR	55/-
500 ,,	2in.	MC/FS	27/6
500 ,,	2½in.	MC/FR	37/6
1 Milliamps	2in.	MC/FS	27/6
1 ,,	2½in.	MC/FR	35/-
5 ,,	2in.	MC/FR	17/6
30 ,,	2½in.	MC/FR	12/6
100 ,,	2½in.	MC/FR	12/6
200 ,,	2½in.	MC/FR	12/6
300 ,,	2½in.	MC/FR	12/6
5 Amperes	2in.	MC/FS	27/6
15 ,,	2in.	MC/FR	10/6
25 ,,	2½in.	MI/FR	7/6
50-0-50 Amp.	2in.	MC/FS	12/6
30-0-30 ,,	2in.	MC/FR	15/6
20 Volts	2in.	MC/FS	10/6
40 ,,	2in.	MC/FS	10/6
300 ,, A.C.	2½in.	MI/FR	25/-
300 ,, A.C.	6in.	MI/FR	150/-

CROSS POINTER METERS. With 2 separate 100 microamp movements. Brand new. **22/6.** Post 2/-.

CIRCUIT TESTER in case. Meter 50 milliamps. **17/6.** Post 2/6.

WHEATSTONE BRIDGE. 1 to 210 ohms in 1Ω steps with built-in galvo, 4 stud switches, in wood case with spare compartment. Ideal for extending range. **50/-.** Post 3/6.

AVO TEST BRIDGES. 220/240 volt A.C. Measures capacities from 5 pf to 50 mfd and resistances from 5 ohms to 50 megohms. Valve voltmeter range 0.1 to 15 volts, and condenser leakage test. BRAND NEW. Full working instructions supplied with instrument. **£9/19/6.** Post 3/-.

"WEE MEGGER" INSULATION TESTERS. 500 volts, in leather case. Brand new. **£12/10/-** Post 2/6.

BATTERY CHARGERS. Ideal for charging 24 volt batteries on electrically propelled vehicles. Rating 22 v. 10 amps., controlled by two 4-position rotary switches for fine and coarse control which enables 6/24 v. batts. to be charged. Input 200/250 v. A.C. 50 cy., fused for A.C. and D.C. Brand new. **£17/10/-.** Carr. 15/-.

JACK PLUGS. Cylindrical bakelite screw on cover. 2 contact. Ideal for amplifiers, etc., **2/6** each. **20/-** doz.

ROOM THERMOSTAT. Adjustable between 45 and 75 deg. Fahr., 250 v. 10 amp. A.C. Ideal for greenhouses, etc., **35/-.** Post 2/-.

TELEPHONES—SOUND POWERED—NO BATTERIES REQUIRED. Just connect with twin flex for clear speech. Can be used as a room to room telephone, extension speaker, baby alarm, etc. Crystal clear reception. Transmitter/receiver units. **4/6** each. Twin flex **4½d.** yd. Post 1/-.

RED CARBON INSERTS. Brand new, **3/-** each, **30/-** doz., post 1/-.



GEARED MOTORS for the model maker, small and very powerful. 4 R.P.M. at 12 v. D.C. or 8 R.P.M. at 24 v. D.C. **35/-.** Post 2/6. Will operate from A.C. mains with our transformer and rectifier 12 v. **25/-**, 24 v. **40/-** extra.

OSCILLOSCOPE. Type 43. With 3½in. CRT. 4-6J7, 3-VR54, 1-5Z4, 1-VU120. Brand new and complete with power pack and leads. **£10/10/-.** Cge. 15/-.

PORTABLE BLOWERS. 200/250 v. A.C./D.C., 300 watts with switch and leads, 1¾in. outlet. **£5.** Post 3/6.

HEADPHONES. Balanced Armature Type DHR. **17/6** per pair. Post 1/6.

HEADPHONES. High resistance 4,000Ω Type CHR, new, **12/6** pair. Post 1/6.

VENT AXIA FANS—EXTRACTION OR INTAKE. 230/250 volts A.C. 6in. diam. blades. **130/-.** 12 volt D.C., **90/-.** Post 2/9.

L. WILKINSON (CROYDON) LTD.

19, LANSDOWNE ROAD, CROYDON

Phone: CRO 0839 **Telegrams: "WILCO" CROYDON**

Precision

WAVEMETER

CAVITY TUNED

110-230 v. A.C. Complete with mains power lead, aerial assembly. New in transit case. Size: D. 9in., W. 7¾in., L. 8¾in. 440 Mc/s—466 Mc/s.

£2.15.0
P. & P. 5/-

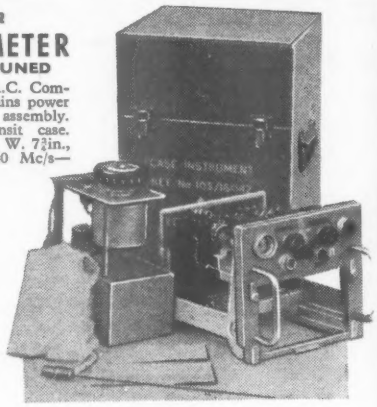

LOUDSPEAKERS

18" L. × 18" W. × 8" deep cabinet. 8in. Speaker with Transformer in good condition. **£1.0.0** P. & P. 5/-

17" L. × 17" W. × 8" deep cabinet. 10in. loudspeaker. **£1.5.0** P. & P. 5/-

A Strobe Unit complete with 8 valves and 2 relays. **£1.10.0** P. & P. 5/-

A. PRESTON & SONS

186 Sussex Way, London, N.19 **Phone: ARChway 5951**

scooters and mopeds

invaluable advice on buying riding and maintenance

by I. R. Hingston

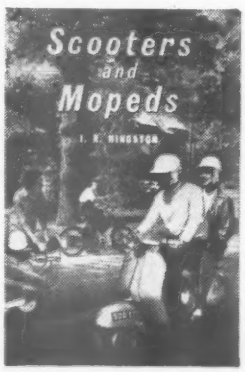

Expert advice on buying, riding and maintaining these machines. The only book of its kind written in easy, non-technical language and offering advice on how to choose your machine, describing how it works and how to look after it. Special chapters are included on how to handle a scooter or moped with confidence, on the requirements of the law, on how to keep dry and warm and on how to trace troubles if the machine stops suddenly miles from anywhere.

7s 6d net **by post 8s 2d**

122pp. illustrated

from booksellers

Published by Iliffe & Sons Ltd
Dorset House
Stamford Street London S.E.1

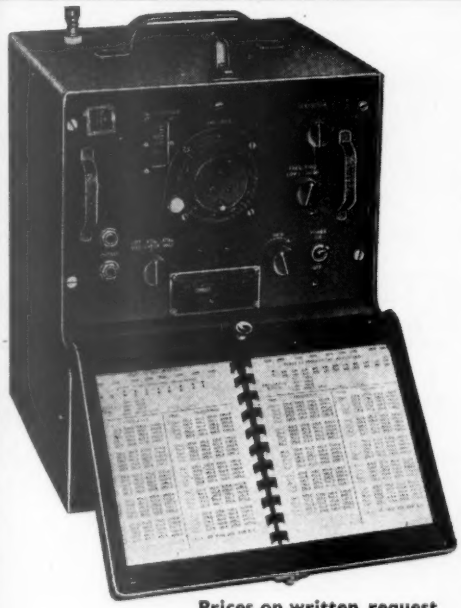

Now available from stock—reconditioned

BC221 HETERODYNE FREQUENCY METERS

Function

An accurate, heterodyne, frequency meter having crystal check points for calibrating equipment using CW or modulated CW. This test set may be used for the following:

- Measurement or calibration of the frequency of transmitters, oscillators, or signal generators.
- Measurement or calibration of the frequency of receivers having a beat-frequency oscillator with zero-beat adjustment.
- Calibration of other test equipment.

Electrical Characteristics

Fundamental Frequency Range: 125 kc/s to 250 kc/s; 2,000 kc/s to 4,000 kc/s.
Calibrated Frequency Range: 125 kc/s to 20 Mc/s.

Overall Accuracy: 0.01% or 25 cycles, whichever is he greater, within the specified temperature range.

Operating Temperature Range: −30°C to +50°C (−22°F to +122°F).

RF Output (Functioning as a test oscillator): 2 millivolts.

ALSO AVAILABLE V.H.F. VERSIONS OF ABOVE

TS174

Electrical Characteristics

Calibrated Frequency Range: 20 to 280 Mc/s.
Fundamental Frequency Range: 20 to 40 Mc/s.
Accuracy 0.05% (throughout the temperature range).
Signal Input (Sensitivity). 20 millivolts to 2 volts.
Signal Output: 50 to 20 millivolts modulated at 1,000 cycles.
Temperature Range: −40°C to +50°C (−40°F to +131°F).

TS175

Electrical Characteristics

Calibrated Frequency Range: 80 to 1,000 Mc/s.
Fundamental Frequency Range: 80 to 200 Mc/s.
Accuracy: 0.05% (throughout the temperature range).
Signal Input (Sensitivity). 20 millivolts to 2 volts.
Signal Output; 100 microvolts to 20 millivolts modulated at 1,000 cycles.
Temperature Range: −40°C to +55°C (−40°F to 131°F).

Prices on written request

UNIVERSAL ELECTRONICS

22-27 LISLE STREET, LONDON, W.C.2. *Tel: GER 8410 & 4447*

FLASH

5000v. INSULATION TESTER

OUTPUT VOLTAGE 0-5000 v. A.C. or D.C. continuously variable from Zero.
OUTPUT CURRENT 5 milliamp max. for D.C. 10 milliamp max. for A.C.
VOLTAGE INDICATOR 3½" diameter for both A.C. and D.C.
BREAKDOWN INDICATION. Voltage reading drops to Zero and Magic Eye closes.
VOLTAGE INDICATION. Deflection of Magic Eye.
POWER SUPPLY 200-250 v. A.C. 40-60 cycles.
DIMENSIONS. 18" × 18" × 13" (Deep).
WEIGHT. 30lbs. nett.

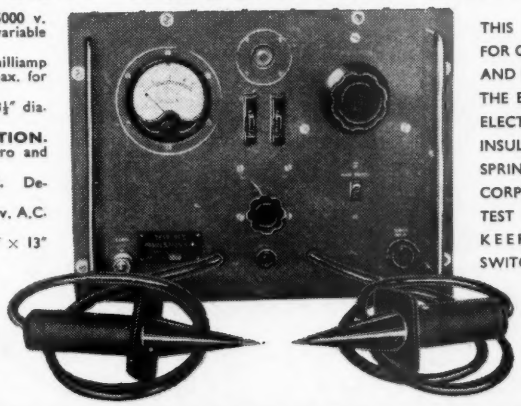

THIS INSTRUMENT IS DESIGNED FOR GENERAL **FLASH TESTING** AND FOR THE MEASUREMENT OF THE BREAKDOWN VOLTAGE OF ELECTRICAL COMPONENTS AND INSULATION MATERIALS. A SPRING-LOADED SWITCH IS INCORPORATED IN THE EARTHED TEST PROD WHICH NORMALLY KEEPS THE H.T. SUPPLY SWITCHED OFF.

OUR PRICE—
£27.10.0
—BRAND NEW

MAKER'S PRICE—
£75 . 0 . 0
—Carriage Paid U.K.

BATES SURPLUS STORE

49 IVY STREET, BIRKENHEAD, CHESHIRE

CHAS. H. YOUNG, LTD

Dept. "W" 110 Dale End, Birmingham, 4. *CENtral 1633*

Headphones High resistance (4,000 ohms). Very sensitive, 12/3. Low resistance, C.L.R. 9/6; p. and p. on either, 1/3.

British Breast Mikes (carbon). Ideal for mobiles. 7/3. P. & P. 2/-

Multi-Way Cable ¾in. diameter. 7 colour coded wires, any length cut. 1/3 per yard. P. & P. min. 1/6. **10-Way cable** (5 pairs). Screened and plastic covered. 2/- per yard. P. & P. min. 1/6

Don't miss this special offer :

CRYSTAL CALIBRATORS

1,000 kc/s crystal controlled, with switched 100 kc/s and 10 kc/s locked multi-vibrators.

This excellent unit is as new, and is contained in polished bakelite case with carrying handle. The circuit uses 6 valves and operates from 2 v. l.t. and 120 v. h.t.

PRICE—only **£3.10.** complete with crystal and valves; or with A.C. power unit, **£6.10.**

3in. Aerial Insulators. Ribbed glass. 1/6 each or 6 for 7/6. P. & P. 1/6.

Condensers. 8 mfd. 750 v., 5/3 each. Post 1/6.

Copper Aerial Wire. 14 g. H/D 140ft., 17/-; 70ft. 8/6. P. & P. 2/- Stranded 7/35. 140ft. 10/-; 70ft. 5/-. P. & P. 2/-.

Dual Range Voltmeters 0-5 and 0-100 v. m.c., 1,000 Ω/v Ranges easily extended. Complete with leads and prods. Solid leather carrying case, 6½ × 5 × 2½in. Only 25/-, post free.

Rack Mounting Panels, all 19in. long by 5¼in. 7in., 8¾in., or 10½in. 5/9, 6/3, 7/6, 9/- respectively. Post 2/-.

Absorption Wavemeters. 3 to 35 mc/s. in 3 switched bands, complete with indicator bulb, 17/6. Post free.

Parmeko Made H.D. Transformers. 30 v. primary, secondary 620/550/375/0/375/550/620, 275 vA. Gives 620 v. at 200 mA. simultaneously with 375 v. at 250 mA. Also 2-5 V, 3 A. for 5R4GYs, etc. Worth at least £7. Our price £3, carr. paid. Inland only not Eire or overseas.

We have the most comprehensive stock of HiFi equipment in the Midlands, including QUAD, LEAK, W.B., RCA, ROGERS, WHARFEDALE and GOODMANS. Send for details, or call for a demonstration to-day.

No C.O.D. under £1. *Please print your name and address.*



Start building the amazing new

MINI-7

A 7-transistor superhet pocket portable with 2½ in. speaker, giving guaranteed results on its internal ferrite rod aerial.

It can be easily assembled in four stages. All parts are available from stock. Make one of these amazing little sets in time for your holidays.

★ *Full constructional details, including wiring diagrams and price list, sent on request. Write for your copy today—price 1/9 post paid.*

We stock a full range of W.B. Stentorian speakers, tweeter units and cabinets. Send s.a.e. today for illustrated leaflet.



Here's W.B.'s new

HF1016

No other speaker has all these fine features!

- ★ 10in. die-cast chassis
- ★ 10 watts handling capacity
- ★ Universal impedance
- ★ 35 c/s bass resonance
- ★ 16,000 gauss magnet
- ★ Patented cambric cone

£8. 0. 0.

★30-15,000 c/s response

Delivery now from stock. Details sent on request.

HOME RADIO (MITCHAM) LTD

187 LONDON ROAD, MITCHAM, SURREY. *Tel.: MITcham 3282*

COVENTRY RADIO

COMPONENT SPECIALISTS SINCE 1925

We have now trebled the size of our premises in order to supply a larger range of Components, Amplifiers and HI-FI Equipment.

Send your enquiries to:

189-191, DUNSTABLE ROAD LUTON, BEDS.

New Telephone No.: LUTON 7388-9

RADIO & ELECTRONIC ENGINEERS . . .

The MORSE CODE is still, and always will be, the basic Code for individual Signalling, whether on visual or telecommunication circuits.
So add this simple and interesting subject to your qualifications. Apart from the pleasure derived from this extra knowledge, it counts for much when a step up the ladder is under consideration.
Write for the CANDLER BOOK OF FACTS and see for yourself how fascinating the Candler method of teaching the Morse Code will prove.

CANDLER SYSTEM CO.
(56W) 52b ABINGDON ROAD, LONDON W.8
Candler System Co., Denver, Colorado, U.S.A.

PROVED

The finest method for cleaning records

Already over 200,000 enthusiastic users

THE **"Dust Bug"**

AUTOMATIC GRAMOPHONE RECORD CLEANER

PATENT APPLIED FOR

Price reduced to 17/6 (plus 7/- purchase tax)

from your local dealer or

CECIL E. WATTS

Consultant and Engineer (Sound Recording and Reproduction)

Darby House, SUNBURY-on-THAMES, MIDDX

The Osmor "SATELLITE" F.M. RECEIVER

a Sensitive Unit of Quality

A completely stable and drift-free tuner for adding to an existing radio or radiogram, or hi-fidelity amplifier. Installation is simple and convenient because of the small size of the unit and the fact that a tuning scale is not required. The special frequency control circuit ensures that the switch-tuned stations are held precisely.
Complete Kit £7/5/- (less valves).



Get these FREE CIRCUITS & WIRING DIAGRAMS

T.R.F. Circuits
Battery Circuits
Portable Circuits
S'het Circuits
Mains Circuits
Fitter Circuits
T.V. Converter Circuits, etc., etc.

Send 1/- in stamps for the lot!

OSMOR

Dept. (WW23) 418 Brighton Road, South Croydon, Surrey *Telephone Croydon 5148/9*

OSMOR

DEPENDABLE RADIO SUPPLIES LTD.

12a TOTTENHAM STREET, LONDON, W.1. *(2 minutes Goodge Street Station. Opp. Heals in Tottenham Court Road)*

Phone : LANgham 7391/2. Hours of Business 9-6. Please print your name and address.

BLOWER MOTORS

(6-12 or 27 volt) 17/6.
Complete with blower 22/6.
P. & P. 2/6.

COMPLETE P.A. SYSTEM

Canadian Telephone loudspeaking Amplifier Unit with 4 loud hailers, powered microphone, headphones and spares. Works off 12 v. D.C. New and boxed, ready for export.

OR SPECIAL OFFER TO CLEAR THE LOT **£7-10-0** complete. Carriage extra.

LOUD HAILERS. Ex Govt. Impedance 7½Ω. Handling cap. 6 watts, 20/-. Post 3/6.

RELAYS

SIEMENS HIGH SPEED

250+250 coil	8/6
850+850 coil	10/6
1,000+1,000 coil	12/6
1,700+1,700 coil	17/6

EVERY VALUE & MAKE OF P.O. TYPE 3,000 RELAY FROM STOCK

DYNAMOTOR ROTARY TRANSFORMER



D.C. input 13.5 v. Output 285 v. at 75 mA. **57/6.**
D.C. input 27 v. Output 285 v. at 75 mA. **37/6.**
D.C. input 12 v. Output 250 v. at 50 mA. **47/6.**
Postage & Packing on each 3/6.

LOUDHAILER SPEAKER UNIT



Impedance 7½Ω. 6-8 watts output. Weight 10lb. Size 7½in Depth, 10in. Diam. Easy Fixing. Weatherproof Spun solid steel. Hammered finish.

PRICE **£3/10/-.**

Carriage & Packing 7/6.
BOTH ITEMS IDEAL FOR SPORTS EVENTS, ELECTIONEERING AND SOCIAL FUNCTIONS.

DELCO ROTARY TRANSFORMERS



Made in U.S.A.
27/6
P. & P. 5/-.
12 volts input, 265 v. output, 120 mA.
24 volts input, 540 v. output, 26 mA.

UNREPEATABLE OFFER LESS THAN HALF MANUFACTURER'S COST



Brand new single phase motors suitable for tape recorders, radiograms, workshops, etc., etc. Has many uses. Reversible 200-230 v. 5in. oz. torque. 1,400 r.p.m. Capacitor start. Weight 4½lb. Length overall 5in., spindle both ends. ⅜in. x ¼in., ⅜in. x ¼in. Price, inc. P.P. and capacitor, **55/-.**

ROTARY TRANSFORMERS

Delivery Ex Stock. Quotations on application.



H.T.31 input 11.5 v. Output 250 v. at 125 mA.

H.T.32 input 11.5 v. Output 490 v. at 65 mA.

AS SUPPLIED TO GOVT. DEPTS. & LEADING MANUFACTURERS.
Quantity & Export enquiries invited. Callers welcome. Terms: Cash with order or C.O.D.

16mm. CINE CAMERAS

(EX AIR MINISTRY)

BRAND NEW. SEALED CARTONS
£6.10.0
Post free in U.K.
CANNOT BE REPEATED
F/3.5 Triple Anastigmatic lens. 16 frames per sec. Complete with magazine and 24 v. motor.

OPPORTUNITIES IN RADIO

Get this FREE Book!

'ENGINEERING OPPORTUNITIES' reveals how you can become technically qualified at home for a highly paid key-appointment in the vast Radio and Television Industry. In 148 pages of intensely interesting matter, it includes full details of our up-to-the-minute home study course in all branches of **TELEVISION and RADIO, A.M. Brit. I. R. E., City & Guilds, Special Television, Servicing, Sound Film Projection, Short Wave, High Frequency and General Wireless Courses.**

We definitely Guarantee
"NO PASS—NO FEE"

If you're earning less than £18 a week this enlightening book is for you. Write for your copy today. It will be sent **FREE** and without obligation.

BRITISH INSTITUTE OF ENGINEERING TECHNOLOGY
388b COLLEGE HOUSE,
29-31 WRIGHT'S LANE,
LONDON, W.8.

BIET

A TAPE PRE-AMP OF REMARKABLE QUALITY

Designed to produce the best from all good tape decks

THE TELE-RADIO (1943) LTD.

MASTER-LINK M2A

- **ADJUSTABLE TO C.C.I.R. CHARACTERISTIC**
- **± 2DB FROM 30 C/S TO 8 KC/S AT 3¾ I.P.S.; 14 KC/S AT 7½ I.P.S.; 15 KC/S AT 15 I.P.S.**
- **COMPLETE WITH SEPARATE POWER PACK & INSTRUCTIONS**

27 GNS. *(P./P. 4/-)*

An exclusive product of Tele-Radio (1943) Ltd., embodying the most advanced principles of tape recording techniques. Recordings may be taken direct from microphone, pick-up or radio, and it may be used with tape decks incorporating head switching. Includes playback speed equalisation, metering of signal and bias voltages, signal monitor output, oscillator cut-out, D.C. Solenoid supply and C.C.I.R. characteristic.

Full descriptive leaflet on request—

TELE-RADIO (1943) LTD. 189, EDGWARE RD., LONDON, W.2

Our only address • Few mins. from Marble Arch • Open all day Sat. • *Phone: PAD 4455/6*

OUR NEW BENDER

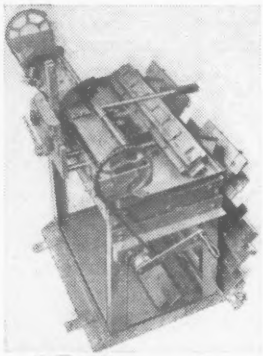

TYPE RZ-26 with CHAIN GEAR

Shown with SNAP CUTTER fitted

Quickly and Accurately Forms

ANGLES, CHANNELS, SECTIONS BOXES, LIDS, TRAYS, TANKS, CHASSIS BRACKETS CLAMPS, CLIPS, SHROUDS, etc.

Invaluable to Research Workers and Manufacturers of Chemical, Electronic, Radio and Electro-Medical Apparatus. Needle Bearings and Chain Reduction Gear give remarkably easy working. Capacity: 16 s.w.g. MILD steel. Does all that the RXX will do and will handle 14g. for Instrument Cases.

For 6-page Folder write to:—

A. A. TOOLS (W)

197a Whiteacre Rd., Ashton-u-Lyne

Portable Record Player

CABINETS

With uncut motor boards and high-grade rexine finish.

Single Player Size, suitable most non-auto motor units, including transcription motors. Internal dimensions: 13½ × 16in. Height above motor board 3½in. Below 2½in. Colours: red or blue. **46/6** plus 5/6 carriage.

Single Player Size, with space for amplifier and speaker, suitable most non-auto motor units. Internal dimensions: 15 × 14½in. Height above motor board 3½in. Below 3in. Blue only. **55/-** plus 5/6 carriage.

Auto-change Type, with space for amplifier and speaker, to house Monarch, Collaro 54, 456, Challenger or Conquest, Staar Galaxy or Garrard 120 Changers. Fitted catches and handles. Internal dimensions: 15½ × 14 × 7½in. Motor board 14 × 12½in. Height above motor board 5in. Below 2½in. **£3/5/-** plus 5/6 carriage.

Printed Circuit Amplifiers using EL84 and 6X4 valves, complete with volume and tone controls, mounted on baffle board complete with 7 × 4in. speaker, and attractive grille cloth. Complete with all leads and requiring only four screws for installation in our £3/5/- cabinet. Price **£4/19/6** plus 5/6 carriage.

Larger Type Auto-change Type Cabinet, suitable for Plessey, early Collaro, Garrard 88 or 98 Changers. Will take 10 × 6in. speaker. Internal dimensions: 17 × 15 × 7½in. Motor board 15 × 12½in. Height above motor board 5½in. Below 2½in. Choice of red or blue **£3/19/6** plus 5/6 carriage.

Send stamp for complete bargain list.

RONALD WILSON & CO.

(DEPT. W.W.), 12 BRIDGE STREET, WORCESTER

"DIPLOMA" HEADPHONES

Lightweight High Resistance (4,000 ohms). Complete with cord

17/6

Ideal for CRYSTAL SETS

The 'TYANA' Standard Soldering Iron

- Adjustable Bit
- Weight approx. 4 oz.
- Heating time 3 min.
- 40 Watt economy Consumption
- Standard Voltage Ranges

16/9

Replacement Elements and Bits always available

KENROY LIMITED

152/297 UPPER ST., ISLINGTON, LONDON, N.1

Telephone: CANonbury 4905-4663

The NEW

EDDYSTONE '870'

RECEIVER

PRICE — **£34.16.0** *(inc. P.Tax)*

Efficient broadcast reception on short, medium and long waves. A Semi-portable AC/DC set equally suitable for cabin or home use, offering Eddystone design and workmanship at a Reasonable Price.

n stock at :—

WEBB'S RADIO

14 SOHO STREET, LONDON, W.1

Telephone GERrard 2089

WIREWOUND RESISTORS

Eureka wound on strip. 1 to 1,000 ohms: 1% **2/9**; 0.5% **3/-**; 0.2% **4/3**; 1K to 5K, 1% **3/3**; 0.5% **3/6**; 0.2% **4/9**. 5K to 20K, 1% **4/-**; 0.5% **4/3**; 0.2% **6/-**; 0.75W rating. Your value wound to order, quick delivery. Special quotation for quantities.

SHUNTS

Wire-ended Eureka shunts, three ranges, 1% accuracy, for inclusion in customers' own apparatus. For 1 mA. 100 ohm meter, ranges 10, 100, 1,000 mA. For 500μA 500 ohm meter, ranges 5, 50, 500 mA. Price **8/6** each.

PLANET INSTRUMENT CO.

25, DOMINION AVENUE, LEEDS, 7.

THERMOSTATIC SOLDERING IRON

CECO — 70 watt

Instrument size

HEATS UP QUICKLY—1½ mins.—STAYS HOT—but NEVER OVERHEATS—BIT DOES NOT CORRODE OR NEED CLEANING

WEIGHT—4½ ozs. (Excluding Flex)

ALL PARTS INTERCHANGEABLE

The Thermostat is easily adjusted to suit the grade of solder and keeps the temperature to within 15°C. It incorporates a microswitch giving snap action on-off with minimum electrical interference Eliminates dry joints and damage to insulation. Element and bit last much longer.

LIST PRICE 85/- each

BRITISH PATENT No. 663214

Available from Manufacturer:—

CARDROSS ENGINEERING CO. LTD.

LEVENFORD WORKS DUMBARTON

Phone: Dumbarton 655

METERS

WE CAN SUPPLY WITHIN 7-14 DAYS

a complete range of moving coil—moving iron—electrostatic—thermocouple—also multirange meters—meggers—pyrometers and laboratory test instruments, etc.

All to B.S.89.

Instruments tested and standardised on your premises, and replacements supplied from our stock.

REPAIRS

Delivery 7-14 days

Our skilled craftsmen carry out repairs or convert any types and makes of single and multirange meters.

Where desired repairs are accepted on contract.

THE V.Z. ELECTRICAL SERVICE

9, NEWPORT PLACE, LONDON, W.C.2

Telephones: GERrard 2613 and 4861

ODDIE FASTENERS

Pat. 507249

THE FASTENER WITH ENDLESS APPLICATIONS—SIMPLE—POSITIVE SELF-LOCKING. MADE IN A VARIETY OF TYPES AND SIZES. SPECIAL FASTENERS TO SUIT CUSTOMERS' REQUIREMENTS. WIDELY USED IN THE RADIO INDUSTRY.

Illustrated brochure and other information will gladly be sent on request.

DEPT. "W.W."

Oddie, Bradbury & Cull Ltd., Southampton

Tel.: 55883 Cables: Fasteners, Southampton

Hi - Fi

Obtainable from

L. WESTWOOD 46 GEORGE ST. W WESTWOOD PHONE OXFORD 47783

AMPLIFIERS

Quad. Mk. II and Control Unit	£42	0	0
Leak T.L.12	£18	18	0
Leak Varislope III	£15	15	0
R.D. Junior and Control Unit. Prices from	£25	0	0
T.S.L. (with cabinet)	£13	13	0
Tripletone 12 w. Hi-Fi Major	£15	18	9
Tripletone De Luxe	£9	7	6
Tripletone Junior	£6	19	6
Armstrong A10	£32	0	0

TUNERS VHF/FM

Quad - Eddystone - Rogers - Jason - T.S.L. - Armstrong

TRANSCRIPTION MOTORS

Garrard 301	£26	8	0
Connoisseur	£28	11	0

Lenco and Collaro Transcription Units.

TAPE DECKS. Truvox, Brenell, etc.

MICROPHONES. Moving Coil and Crystal.

SPEAKERS

Tannoy Dual Concentric 15in. with X-over	£35	12	0
Tannoy Dual Concentric 12in. with X-over	£29	5	0
Tannoy Direct Radiator 12in.	£14	0	0
Goodmans Axiom 150	£11	5	9
WB.HF.10/12	£4	19	9

Tweeters and a range of Wharfedale Units stocked.

CABINETS. Goodmans and W.B.

PICK-UPS

Garrard TPA10 T/O Head Diamond L.P. £15 9 4
Connoisseur, Leak, Acos, B.J.
Tannoy and Goldring Cartridges.

EDDYSTONE Communications Receivers

Model 680.X	£120	0	0
Model 750	£78	0	0
Model 840A	£55	0	0
Model 870	£34	16	0

EXCELLENT STOCKS OF VALVES AND COMPONENTS ALWAYS AVAILABLE

A. C. SOLENOID TYPE SBM



GREATLY INCREASED PERFORMANCE

Continuous 3¾ lbs. at 1"
Instantaneous to 16 lbs.

Same dimensions as Type SB

Smaller sizes available

Greatly increased discounts for quantities

Also Transformers to 7KVA 3 Phase

R. A. WEBBER LTD.

18 FOREST ROAD, KINGSWOOD, BRISTOL. PHONE 67-4065

LYONS RADIO LTD.

E.H.T. TRANSFORMERS. Ex-Govt. of recent manufacture. Very high-grade finish. Input: 230 v. 50 c.p.s. Output: 2 windings each 2 kV. at 10 mA. These can be connected in series to give 4 kV. Overall size approx. 8 × 4 × 4in. **PRICE ONLY 15/6.** post 3/6.

UNIVERSAL MEASURING BRIDGES. Ex-Govt., by Mullards. Measure 0.1 ohms to 10 megohms and 10 pf. to 10 mfd. Can also be used to calculate power factor, for percentage tolerance and, with the use of external standards, inductance measurement. Operate from 100 to 250 v. 50 c.p.s. A.C. mains. Supplied in good condition and working order with instructions. **PRICE ONLY £7,** post 3/6.

TEST SETS TYPE S.E.2. Splendid bargains either as a breakdown unit for useful parts or can possibly be used by some as a V.H.F. signal generator, etc. Frequency coverage is thought to be of the order of 150 to 270 Mc/s. Contents include A.C. 50 c.p.s. mains power pack. Transformer Sec.: 250/0/250 v. at 25 mA., 6.4 v. at 2.0 A. twice, 6.4 v. at 0.6 A., 6.4 v. at 2.5 A. There are three silver plated brass screening boxes, 2 two-b unk ceramic switches, 2in. dia., 0/6 mA. M/C. meter, 7 valves (2—6J5, CV172, VR137 6X5, 2-VR92). The whole is housed in a wooden case with hinged lid and lower half metal lined. Overall size 20in. long × 10½in. deep × 10in. wide. This would make an admirable tool chest. In excellent condition. **PRICE ONLY** 45/-, carriage 8/6.

LOUD-HAILER SPEAKERS. Handle up to 8 watts, with output transformer, speech coil 7 ohms. Mounted in wood case approx. 9 × 8 × 7in. Ex-Govt. by Tannoy. **PRICE ONLY 17/6,** post 3/6.

3 GOLDHAWK ROAD (Dept. M.W.) SHEPHERD'S BUSH, LONDON, W.12 *Telephone:* Shepherd's Bush 1729

SAMSON'S SURPLUS STORES

Exclusive Purchase!!

S.T.C. RECTIFIER SUPPLY UNIT No. 11 TYPE ZB 10235

Specification:—A.C. input 100-260 volts. 45-65 cycles. D.C. output 24 volts 11 amps. and 130 volts 600 m.a. very conservatively rated. L.T. and H.T. completely smoothed. All circuits fused. Mains on/off switch. Built in grey metal cabinet as illustrated. Height 5ft. 0in., width 1ft. 7½in., depth 1ft. 1½in. Weight 200lb.

These units were originally designed to supply L.T. and H.T. power in conjunction with Bay Power No. 3 to S.O.S./T 3 channel telephone system, but are ideal for the electronic industry, research laboratories, schools, etc., etc Complete with instruction book and circuit. Supplied brand new at a fraction of the maker's price.

£17.10.0 ex-warehouse

If further technical details are required, Instruction Book will be forwarded against a deposit of One Pound. Export enquiries are welcomed. We have a limited number of these units ready packed in original transit cases at a small extra charge.

169/171 Edgware Road, London, W.2. **Tel.: PAD 7851**
Open all day Saturday.

TELEVISION AERIAL COMPONENTS

DESIGNED FOR CONSTRUCTING BAND I & BAND III T.V. AERIALS

ELEMENT DIMENSIONS SUPPLIED FOR ALL CHANNELS

Selecting at random from our new multi-page catalogue:

★ Band III Folded Dipoles *(As illustrated)*
★ Reflector and director rod holders
★ Masthead Fittings for ¾", 1", 1½" and 2" Masts
★ Mast Coupling units for 2" Masts
★ Insulators, both Rubber and Plastic *(As illustrated)*
★ Alloy Tubing for Elements, Cross boom and masting



Send 1/- P.O. for the revised, fully illustrated catalogue to:

FRINGEVISION LTD., Marlborough, Wilts. ***Phone 657/8***

WIRELESS BARGAINS

TRANSRECEIVERS. Type "38" (Walkie Talkie) complete with 5 valves, etc. New condition untested by us but serviceable, no guarantee **22/6** each.

ATTACHMENTS for Type "38" Transreceivers. ALL BRAND NEW: Headphones **15/6**; Throat Microphones 4/6; Junction Boxes **2/6**; Aerials, No. 1 **2/6**; No. 2, **5/-**; Webbing **4/-**; Haversacks **5/-**; Valves—A.R.P 12 **4/6**; A.T.P.4, **3/6**; Set of FIVE VALVES **19/-** the set.

TRANSRECEIVERS. Type "18" Mark III. Two Units (Receiver and Sender). Six Valves, Microammeter etc. in Metal Case. Untested, without guarantee but COMPLETE **£2/18/6.**

ATTACHMENTS for "18" Transreceivers. ALL BRAND NEW. Headphones **15/6**; Hand Microphone **12/6**; Aerials **5/-**; Set of 6 Valves **30/-**

RECEIVERS R.109, S.W. Receiver in Case, eight valves. Speaker and 6-v. vib. Pack. Untested, no guarantee but COMPLETE **£2/18/6.**

RESISTANCES. 100 Assorted useful values: New wire end **12/6.**

CONDENSERS. 100Ad. Mica; Tubular; etc **15/-.**

BOMBSIGHT COMPUTERS. Ex-R.A.F. NEW. Hundreds of Components, Gears, etc. **£3.**

LUFBRA HOLE CUTTERS. Adjustable ⅞in. to 3½ in. For Metal, Plastic, etc. **7/-.**

QUARTZ CRYSTALS. Types F.T.241 and F.T.243. 2-Pin ½in. Spacing. Frequencies between 5,675 Kcs. and 8,650 Kcs. (F.T.243). 20Mcs. and 38.8 Mcs. (F.T.241. 54th Harmonic) **4/-** each. ALL BRAND NEW. TWELVE ASSORTED CRYSTALS **45/-.** Holders for both types **1/-** each. Customers ordering 12 crystals can be supplied with lists of Frequencies available for their choice.

MORSE TAPPERS. Standard type **3/6**; Extra Heavy on Base **5/6.**

TRANSPARENT MAP CASES. Plastic 14in. x 10½in. Ideal for Maps, Display, etc. **5/6.**

STAR IDENTIFIERS. Type I A-N Covers both Hemispheres **5/6.**

Post or carr. extra. Full list Radio Books etc., **3d.**

SOUTHERN RADIO SUPPLY LTD
11 LITTLE NEWPORT STREET,
LONDON, W.C.2. GERrard 6653.

M. & J. PEARSON

Radio, Television & Radar Equipment

OFFER THE FOLLOWING AMAZING BARGAINS

1.—1/6th H.P. Electric Motors. 200-220 v. 50 cyc., 1,435 rev. Capacity start. Shock mounted. **£4** ea.

2.—Films. 16 mm. Panchromatic, fast, perforated. 16 rolls of 10ft. in tin. only **3/-** tin

3.—5 7/8 x 8ft. Panchromatic, high speed day, unperforated, 20 exposures **3/-** spool

4.—5½in. x 47ft. Panchromatic, high speed day, unperforated, 100 exposures **5/6** spool

5.—5½in. x 112ft. Panchromatic, perforated **7/6** spool

6.—No. 18 Sets in clean condition, sold separate, receivers or transmitters **25/-** ea.

Special offer to colleges, etc.

Extra large valves. CV1230=NT54, CV1274=NU26 and CV1276. All new and cased. only **30/-** ea.

All prices include Post and Packing Scotland and England

263 GALLOW GATE
GLASGOW, C.4

Telephone: BELL 0729

CHANGE OF ADDRESS

GRIFFITHS HANSEN (RECORDINGS) LTD.

London's Leading Agents for **VORTEXION** *Tape Recording Equipment etc., have now moved their* **RECORDING STUDIO, SALES AND HIRE** *Department to :—*

24/25 FOLEY STREET, LONDON, W.1.
MUSeum 2771/6375.

LEEVERS RICH

MAGNETIC RECORDERS

for

AUDIO, INDUSTRIAL & SCIENTIFIC APPLICATIONS

LEEVERS-RICH EQUIPMENT LTD.
788 Hampstead Rd., London, N.W.1. EUSton 1481

THE "ZEPHYR" (W) 200/250 volts. SHADED POLE MOTOR.

Precision built. 2 600 R.P.M 25 watts. 2¾in wide (over fixing lugs). 2½in. long. Shaft extension ⅝in. Die-cast rotor. Sturdy and SILENT. Ground and polished spindle (5/32in. diam.).

Suitable for Fans, Extractors Fan Heaters, Projector cooling, cupboard airing and all purposes where reliability, silence and freedom from radio and T.V. interference is essential.

Price 37/6 post free (motor only)

ACCESSORIES

Bakelite fan. 8in. diam. 7/6 Metal fan. 4in. diam. 5/-

THE BESTFREND ELECTRICAL CO., LTD.
BANSTEAD, SURREY.
F.H.P. motor manufacturers for 30 years.
Quantity enquiries invited.

Research Development Work Undertaken

Design and Prototype Development of Audio-Electro Devices and Equipment. Box No. 2336 *c/o "W. World"*

NEST OF DRAWERS

Overall: 6¼in. wide x 5in. deep x 10¼in. high. 12 drawers, each 3in. wide x 4¼in. deep x 1¼in. high. Useful storage for radio components, nuts, bolts and other small parts. Sheet steel **20/-**. P. & P. 3/-.

HARMSWORTH, TOWNLEY & CO.
2 JORDAN STREET, MANCHESTER 15

TRANSFORMERS for MULLARD 510 AMPLIFIER



Fully Shrouded Upright Mounting. Fully Guaranteed, interleaved and Impregnated. T.56 300-0-300 v. 100 mA., 6.3 v 2 a. ct., 6.3 v. 1 a. **27/-.** P/P 2/6. T55 for 510 Amp. and Tuner 300-0-300 v. 120 mA., 6.3 v. 2.5 a. ct., 6.3 v. 2.5 a., 6.3 v. 1 a. **32/-.** P/P 2/6. Primaries for above 240-220-200; 0-10 v. 50 c/s. T44 Ultra-Linear Output Transformer 8,000 ohm. with 43% tappings for 510 Amp. **30/-.** P/P 2/-.

SPECIAL OFFER T44 and T55 **59/-.** P/P 3/6.

All carefully made to conform to specifications.

SOUTHERN TECHNICAL SUPPLIES
13 NORTH STREET, PORTSLADE, SUSSEX
Tel.: HOVE 47223

FM and HI-FI COMPONENTS

in stock for the

WIRELESS WORLD FM TUNER UNIT

DENCO FM TUNER	circuits	1s. 6d.
RADIO CONSTRUCTOR FM	,,	2s. 0d.
MULLARD AMPLIFIERS	,,	3s. 6d.
G.E.C. 912 PLUS AMPLIFIERS	,,	4s. 0d.
G.E.C. FM PLUS TUNER	,,	2s. 6d.

Separate price lists on request to

J. T. FILMER 82, DARTFORD ROAD, DARTFORD, KENT.
Tel: Dartford 4057

METERS

All types
Any make

Single and Multi-range repaired and recalibrated

Meters 2" to 6" supplied from stock.

Scaled to requirements.

E.I.R. INSTRUMENTS LTD.
329 Kilburn Lane, London, W.9
Tel.: LADbroke 4168

The Managing Director of

NORTHERN RADIO AND TELEVISION LTD.

of Doncaster, announces that his is the only limited liability company registered in this name and this Company is not connected in any way with any person or persons trading in a similar name.

it's the

TA2B

TRANSISTOR AMPLIFIER

Max. Sens'ity 2 Microvolts RMS. Audio Range. Noise 3%. Portable. Internal switching to monitor either of two a.c. inputs. Built-in balance circuit for comparison of two anti-phase inputs, permitting measurements independent of source power variations. The 100 microamp meter may be used directly for d.c. measurements. Selective or wideband operation.

Write for leaflet A15.

MICROWAVE INSTRUMENTS LTD.
NORTH SHIELDS NORTHUMBERLAND

Excellence in design . .

Specialists in Sub-miniature Telecommunication Components.



STAND OFF INSULATOR

For 1500 volts working.
Overall height 1.1".
Over chassis .86"
Silver plated spill .35"
6BA hexagon stud
chromium plated.

(Illustrations approximately actual size)

MINITRIMMER

Standard maximum capacities up to 13pF. Voltage 500 DC. Base ⅜" square with fixing centres for 10BA ½" apart.



Details from:—

OXLEY
DEVELOPMENTS CO. LTD.
ULVERSTON, NORTH LANCS
Tel.: ULVERSTON 3306

SOLDERING ?

HENLEY SOLON
ELECTRIC SOLDERING IRONS

for 25 years the best

25 watt Instrument Model

A model for every purpose

Leaflets on request from:

W. T. HENLEY'S TELEGRAPH WORKS CO. LTD.
51-53 Hatton Garden, London, E.C.1
Tel: CHAncery 6822

Fidelia



The Fidelia range of hand-built High Fidelity equipment includes the following models:—

Fidelia Imperial. V.H.F. reception, plus gramophone pre-amplifier for all types of pick-ups, full tone control circuit, tape jacks, etc. Price with our Major amplifier **£38.** As VHF tuner and Pre-amplifier/tone control unit **£20.**

Fidelia Major. Short, Medium and Long Wavebands, plus VHF/FM. Gram pre-amp. and full tone control. R.F. Stage on all bands, variable selectivity, etc. Price **£23/10/-**, or with our Major 10-watt amplifier **£44.**

Fidelia De Luxe. 11-valve chassis. VHF/FM plus Medium and Long wavebands, full tone control, 7-watt push-pull triode output stage **£34/10/-.**

Fidelia Junior. Our new 8-valve AM/FM chassis, having many of the exclusive Fidelia features for **£25.**

Full details willingly on request. (6d. for postage is appreciated.)

ELECTRO Acoustic DEVELOPMENTS

2 AMHURST ROAD, TELSCOMBE CLIFFS Nr. Brighton, SUSSEX
Tel. Peacehaven 3156

COPPER WIRE

ENAMELLED, TINNED, LITZ, COTTON AND SILK COVERED.
RESISTANCE WIRES,
1 oz., 2 oz., and 4 oz. REELS.
All gauges available.
B.A. SCREWS, NUTS, WASHERS, soldering tags, eyelets and rivets.
EBONITE and BAKELITE PANELS, TUFNOL ROD, PAXOLIN TYPE COIL-FORMERS AND TUBES, ALL DIAMETERS.
Latest Radio Publications.
SEND STAMP FOR LIST. TRADE SUPPLIED.

G.E.C., B.T.H. & WESTINGHOUSE GERMANIUM CRYSTAL DIODES

1/- each. Postage 3d.

Diagrams and three Crystal Set Circuits Free with each diode.
A large purchase of these fully GUARANTEED diodes from the manufacturers enables us to make this attractive offer.

POST RADIO SUPPLIES
33, Bourne Gardens, London, E.4

REPANCO

HIGH GAIN TRANSISTOR COMPONENTS

MINIATURE RANGE—For pocket receivers.
Ferrite Slab Aerial Type FS3. Medium Wave only. With fixing grommets. Size 3in. x ⅔in. x 5/32in., **7/6.**
Oscillator Coil Type XO5. Medium Wave only. Overall size ½in. dia. x 1in. Enclosed in Ferrite pots, **5/-.**
I.F. Transformer Type XT6. Suitable for 1st and 2nd I.F. 455 Kc/s. Size ½in. sq. x 1¼in., **10/-.**
I.F. Transformer Type XT7. Designed for 3rd I.F.T. or detector I.F.T. 455 Kc/s. Size as XT6, **10/-.**
Push Pull Interstage Transformer Type TT9. Ratio 1 : 1 C.T. Radiometal Core. Size ⅔in. x ½in. x 13/32in., **12/6.**
Push Pull Output Transformer Type TT10. Ratio 8 : 1 C.T. Matched to 3 ohm. speaker. Size as TT9, **12/6.**
Practical and Theoretical circuits enclosed with each Repanco Transistor Component.
"THE MINI-7" a new personal portable transistor receiver. Size 5½in. x 3½in. x 1½in. Send 1/9 P.O. for instructions.

Mail Order and Trade:
RADIO EXPERIMENTAL PRODUCTS, LTD.
33 Much Park St. COVENTRY
Tel.: 62572

Wholesale Enquiries and Export:
REPANCO, LTD.
O'Brien's Buildings 203-209 Foleshill Rd. COVENTRY
Tel.: 40594

NEW BOOKS ON RADIO & TELEVISION

The New A.R.R.L. Amateur Radio Handbook 1958. Postage 1/9	32/6
Tape Recorders and Tape Recording by Weiler. Postage 1/-	23/-
Radio Upkeep and Repairs, new edition by Witts. Postage 1/-	15/-
Brimar Radio and Tele Tube Manual No. 7. Postage 1/-	6/-
R.S.G.B. Amateur Radio Call Book, 1958. Postage 6d.	3/6
Radio Control Handbook, by Howard McEntee. Postage 1/-	18/-
A Beginner's Guide to Radio, by Camm. Postage 9d.	7/6
Magnetic Tape Recording, by Spratt. Postage 1/3	55/-
Radio Valve Data, by "Wireless World." Postage 8d.	5/-

A full range of Slide Rules and Drawing Instrument Sets in stock. Send for lists.

UNIVERAL BOOK CO.
12 LITTLE NEWPORT STREET, LONDON, W.C.2 (adjoining Lisle Street)

A MAST PROBLEM? WRITE TO **Skymasts**

BEADON GARAGE BEADON ROAD LONDON W5 Telephone . RIVerside 1124 and 7878

VACWELL ENG. CO. LTD.

SPECIALISTS IN THE DESIGN AND MANUFACTURE OF VACUUM EQUIPMENT
VACUUM OVENS · DEPOSITING · SPUTTERING · VALVE & C.R.T. PUMPING etc.
ALSO EXPERTS IN SHEET METAL CONSTRUCTIONS AND FABRICATIONS
VACWELL ENGINEERING CO., LTD.,
Works and Office: Willow Lane, Mitcham, Surrey. MITcham 1177

The VERDIK QUALITY TEN
10 WATT PUSH-PULL ULTRA LINEAR FEEDBACK
20 GNS COMPLETE
From Your Dealer
AMPLIFIER AND PRE-AMPLIFIER
For details write to
VERDIK SALES LTD.
8 RUPERT COURT, WARDOUR ST. LONDON, W.1. GERrard 8266

TELEVISION TUBES
FACTORY TO YOU
GUARANTEED 12 MONTHS
15/- per inch:
17 inch £12.15.0. 14 inch £10.10.0.
12 inch £9.
Re-processed & Guaranteed 3 Mths:
12 inch £5.10.0. 14 inch £4.10.0.
15 inch and 17 inch £7.
CARRIAGE AND INSURANCE 15/-.
Waiting List for 12 inch C.R.T.'s.
C.W.O. to:
TELE-ACCESSORIES (MFG.) CO.
Dept. J11, 164 Town Street, RODLEY, Leeds

BARGAINS BY POST
YAGI AERIALS. 130 Mc/s. 6-element with folded dipoles, non-collapsible, motorised rotary gear consisting of single phase, geared 230V a.c. motor and large Selsyn motor driving pillar, calibrated in degrees. Easily adapted to 144 Mc/s., £25. Buyers collect. Few only.
D.C. MOVING COIL METERS. 6in. ironclad S/Bd. type 0-150V 25/-, 0-200V 30/-, 0-250V 45/-. Ammeters, 0-50 amps., 35/-. 2½in. flush panel milli-ammeters, 0-1 mA. 21/-.
ROTARY CONVERTERS.
D.C./A.C., 24V, d.c. input at 11 amps., 50-110-230 volts, 200 watts output through transformer. New surplus, tested and guaranteed, £8/10/-, carr. 10/-.
A.C. MOTORS. Crompton ¼-h.p. 230V, 50 c/s, s.p., 1,440 r.p.m., foot mounting, £4/10/-, carr. 5/-. 1/10 h.p. 110/230V a.c., 2,850 r.p.m., 40/-, carr. 3/6.
"S" METERS. New 2¼in.-square flush panel, suitable for AR88 or other receivers, 39/6, post 1/6.
PARALEX ADJUSTABLE HOLE CUTTERS. Capacity: 1-4in., 32/6; 1¼-6¼in., 35/-; 2-10¼in., 95/-; 2-12¼in., 105/-. Morse taper shank, brand new. Write for special leaflet.
SYNCHRONOUS MOTOR UNITS 200/250V, a.c., 50 c/s, totally enclosed; driving spindle ⅜in. long, ¼in. dia., geared to 1 r.p.m. clockwise rotation, 40/-, post 1/9. Brand new and guaranteed. Ratchet counters 5-digit, with spring return, 2-hole mounting new, 12/6, post 8d.
MOTOR PUMPS. Stuart Turner 12V, d.c. Model No. 10; capacity 100 g.p.h. New £4/10/-, post 5/-. Ideal for caravans or motor boats.
THE LESDIX CRYSTAL SET. Suitable for use with tape recorder, 25/-, post 1/6. With headphones, 35/-, post 2/6.
Leslie Dixon & Co.
Dept. A, 214 Queenstown Road, London, S.W.8.
Telephone: MACaulay 2159

RADIO & TELEVISION COMPONENTS
We operate a prompt and efficient MAIL ORDER service.
3d. stamp (only) for catalogue.
James H. Martin & Co. Finsthwaite, Newby-Bridge, Ulverston, Lancashire.

SIFAM
SIFAM ELECTRICAL INSTRUMENT CO. LTD.
LEIGH COURT - TORQUAY - Telephone 4547/8

"ALL your TV Components from one Source"
direct TV Replacements
BONA FIDE TRADE ONLY
Non-Trade Clients — see your dealer NOW!
138 LEWISHAM WAY, NEW CROSS, S.E.14
TIDeway 6666 Grams: Flibak, London, S.E.14

We have in stock for IMMEDIATE DELIVERY at RIDICULOUSLY LOW PRICES, complete
TRANSMITTING-RECEIVING EQUIPMENT FROM AMERICAN SURPLUS origin used in all Armies, Navies, Air Forces as well as Police and Commercial Airlines.
Have you any special requirements? Please write to us.
ASSOCIATED INDUSTRIES INC., European Branch, 111 SQUARE EUGENE PLASKY BRUSSELS, BELGIUM

TANNOY
SOUND EQUIPMENT
Tells you what's going on clearly
WEST NORWOOD · S.E.27
Telephone: GIPsy Hill 1131 (7 lines)

GALPINS
As announced in November we have taken over the Transformer Section of this business. For years we have wound all Galpin transformers and can promise you the same efficiency and quality as in the past.
JEFFERY TRANSFORMER CO.
199 Edward Street, New Cross, London, S.E.14
TIDeway 4458

THE TAPE RECORDER SPECIALISTS
STOCKISTS OF EVERY WELL-KNOWN MAKE INCLUDING
FERROGRAPH · SIMON · VORTEXION
TAPES, DECKS & ALL ACCESSORIES
SHERBOURNE
H.P. & CREDIT TERMS
50, TOPSFIELD PARADE CROUCH END, LONDON, N.8
MOUntview 1987

Tape Amplifiers for Wearite, Collaro and all other Decks, "Miteeamp" 2½ watts 18gns. 6 watts U/L. "Lodestar" 25gns. Transistor tone control pre-amps, etc., Mixer units, etc. Write,
HARDING ELECTRONICS
120a Mora Road, Cricklewood, London, N.W.2
Phone: GLA 1770

LOCKWOOD
ENCLOSURES
Used by every Broadcasting & Television Authority in the British Isles, and Eire, for High Quality Monitoring
LOCKWOOD & CO. (Woodworkers) LTD., LOWLANDS ROAD, HARROW, MIDDX.

NEUCLEX CO. LTD.
for your Prototype Units. Designed and manufactured to specification.
INFRA RED DEVICES and TRANSISTORISATION our speciality.
44 Oak End Way, Gerrards Cross, Bucks
Tel. 3296

BRASS, COPPER, DURAL, ALUMINIUM, BRONZE
ROD, BAR, SHEET, TUBE STRIP, WIRE
3,000 STANDARD STOCK SIZES
No Quantity too Small. List on Application.
H. ROLLET & Co. Ltd.
6 Chesham Place, S.W.1. SLOane 3463
ALSO AT LIVERPOOL, BIRMINGHAM, MANCHESTER, LEEDS.

Career opportunities in industrial electronic control

A career with a difference awaits you with Britain's leading manufacturers of *industrial* electronic equipment. Be in the forefront of the drive to supply industry with the automatic control equipment for the needs of today — and tomorrow!

Positions at both senior and junior levels are available for :

- APPLICATION ENGINEERS
- SALES ENGINEERS
- TECHNICAL WRITERS
- DESIGN ENGINEERS
- DEVELOPMENT ENGINEERS
- SERVICE ENGINEERS
- TEST ENGINEERS
- DRAUGHTSMEN

Apply to Reference FDA at the address below

Equipment currently produced and under continuing development includes; control equipment for electrical machines of all types, specialised drives, regulators, machine tool controls, servo amplifiers and systems, process control equipment, photo-electric equipment, resistance welding controls, computer power supplies, protective and supervisory equipment and a wide range of specialised equipment to meet specific industrial requirements.

Special opportunities for engineers having application experience in the industrial electronic control equipment field, for customer liaison activities. Applications welcomed from engineers having specialised experience in one field, e.g., resistance welding or machine tool control.

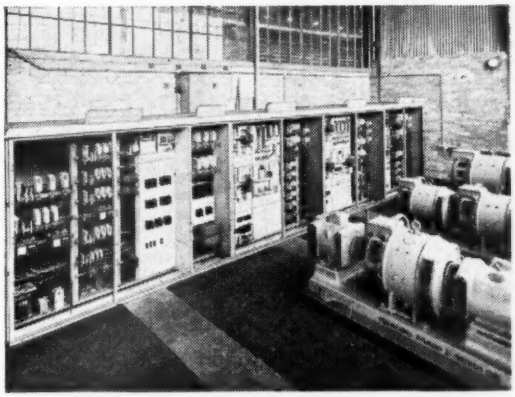

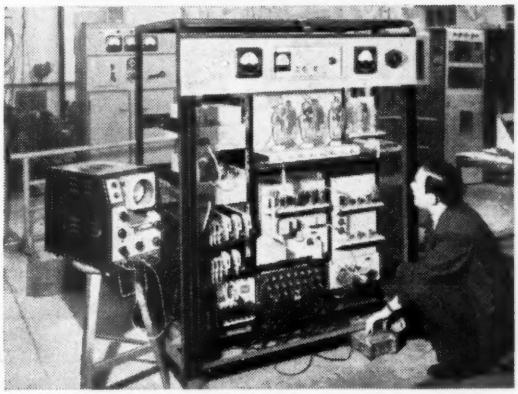

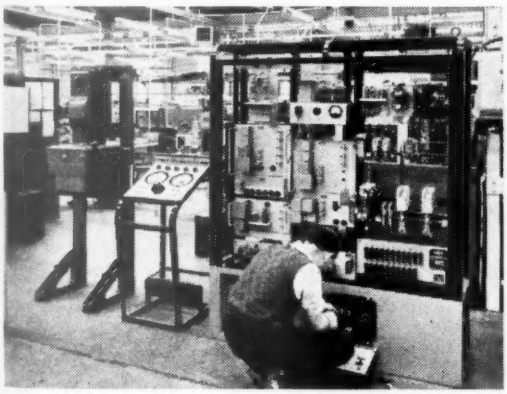

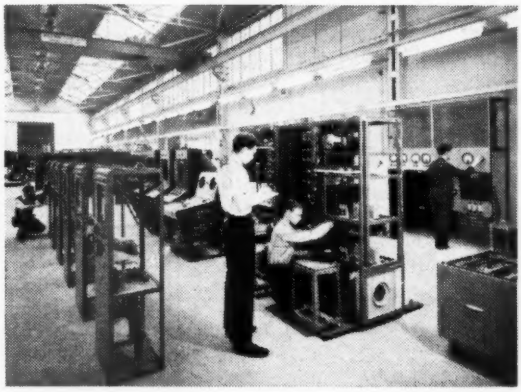

LANCASHIRE DYNAMO ELECTRONIC PRODUCTS LTD

ELECTRONIC BEP EQUIPMENT

RUGELEY, STAFFORDSHIRE, ENGLAND

Manufacturers of Britain's widest range of industrial electronic equipment

A Member of the Lancashire Dynamo Group

A BBC engineering training manual

LONG-WAVE AND MEDIUM-WAVE PROPAGATION

by H. E. Farrow, GRAD.I.E.E.

This booklet is based on a series of lectures given by the author at the BBC Engineering Training Department to students specialising in the operation and maintenance of transmitting stations. The main features of propagation at low and medium frequencies, 30–3,000 kc/s, and in particular the broadcasting bands 150–285 kc/s and 525–1,605 kc/s are explained. There are sections on aerials, ground and sky-waves, attenuation due to earth losses, recovery effects, mixed path propagation, synchronised group working, ionospheric reflection, fading, long-range interference and low-power installations.

4s 6d net by post 4s 10d from leading booksellers

Published for "Wireless World" by Iliffe & Sons Ltd., Dorset House, Stamford Street, London, S.E.1

MARCONI INSTRUMENTS LTD.,

TECHNICAL PERSONNEL REQUIRED,

SENIOR & JUNIOR ELECTRICAL DESIGN ENGINEERS

SENIOR & JUNIOR MECHANICAL DESIGN ENGINEERS

DUTIES. To undertake the design of Test Equipment covering practically the whole electronic field, including Telecommunication, Guided Weapons and Nucleonics. Considerable personal responsibility and freedom is given and there are no set rules regarding the number of people engaged on a project, the allocation of project leaders, etc.

QUALIFICATIONS: The ability to design equipment and aggressively progress a project through to the stage where a model is made and the information is available for a production drawing office. Senior engineers are usually of B.Sc. standard with practical experience in measuring techniques, while Junior engineers are often Graduate Members of one of the Professional Institutions, or have similar qualifications, but this is in no way mandatory. The ability to progress the project through to a satisfactory conclusion is the prime requirement. Due to expanding activities, men with drive and initiative can be sure of progressive advancement.

Comprehensive pension and assurance schemes are in operation, and Canteen and Social Club facilities are provided.

Call any day including Saturday mornings at

MARCONI INSTRUMENTS LTD.,
LONGACRES, HATFIELD ROAD,
ST. ALBANS, HERTS.

or write giving full details to Dept. C.P.S. Marconi House, 336/7 Strand, W.C.2. quoting Ref. WW 2970U.

Dear Sir,

We have another announcement to make which will be of interest not only to our customers who automatically come to us for all their **MAGSLIP, SELSYN** and **GENERAL SERVO** requirements, but also to professional and amateur electrical engineers in industry, education and their own private workshops. We can now offer **HIGH FREQUENCY POWER SUPPLIES** at very competitive prices. **MOTOR ALTERNATOR UNIT.** Cat. L173 gives a regulated output of 80 v. 2,000 c.p.s., 650 w., with an input of 80 v. 16 A. D.C. The price? Only **170/-** (carr. 20/-). Alternatively we can supply the **MOTOR ALTERNATOR** separately Cat. L174 at **117/6** (carr. 20/-). For the engineer requiring medium power at 400 c.p.s we have the **MOTOR ALTERNATOR SET,** Cat. L175, giving two 400 c.p.s. outputs, a, 280 v. 1,680 w.; b, 200 v. 1,200 w. for an input of 230 v. 50 c.p.s. at **990/-** (C.P.). We have also **E.D.C. MOTOR ALTERNATORS** giving 115 v. 400 c.p.s., input 26 v. D.C. conservatively rated at 45 w. at **120/-** (carr. 7/-). For those, for instance, wishing to improve the efficiency of their electro-analytical operations we offer **RECTIFIER SMOOTHING UNITS.** Cat. L176, which gives two doubly choke-capacity smoothed outputs each of 12 v. 3 A. Simple modification will provide outputs of 24 v. 3 A. or even 12 v. 12 A with single stage smoothing. This attractive rack mounting unit is priced at **37/6** (carr. 7/6). Of general interest are the following items: **INTEGRATING HOUR METERS,** Cat. L172 for 200/250 v. 50 c.p.s. operation reading up to 10,000 hours, accuracy 1 minute. 4¼in. dia., price **39/6** (P.P. 3/6). **POWER UNITS, TYPE 3,** input 200/250 v. A.C., outputs 220 v. 100 mA. D.C., 6.3 v. 4 A. A.C. with H.T. voltmeter and ammeter at **70/-** (carr. 10/-). **VARIABLE SPEED MOTORS** 1/6 h.p. 115 v., 50/60 c.p.s., with Graham Variable Speed gearbox output 0-165 r.p.m. at **250/-** (carr. 15/-). **INDICATOR UNIT APW9992A** with 1—VCR97, 3—VR91, 2—VR54, 1—CV1285, 1—VT61, Perspex shield, focus and brilliance controls, 8 pots, ideal for conversion to oscilloscope or built-in C.R.T. display unit, new, **37/6** (carr. 5/-). For this month's special offer we have **PYE 45 Mc/s I.F. STRIPS,** complete with all valves at **12/6** (P.P. 3/6). A really useful **BLOCK CAPACITOR,** 10μF 450 v. wkg is priced at **7/-** (P.P. 1/3) and we have many other values in stock. These offers should convince you that it would be worth your while to send for our **GENERAL LIST** (S.A.E. please), containing many other equally attractive items. In the meantime, we remain

Yours faithfully,

SERVO & ELECTRONIC SALES LTD.

1 Hopton Parade, Streatham High Road, London, S.W.16
STReatham 6165.

Terms: C.W.O Nett Monthly for Approved Accounts.

SENIOR ENGINEER

A Senior Engineer/Mathematician is required at the Feltham laboratories of the Company to lead a section of some 12-15 people engaged on the design of experiments and analysis of their results. The field involved is that of applied radio, but ability and experience in the assessment field are more important than a knowledge of electronics. An honours degree is a necessary qualification. Please apply with full details to the Personnel Department, E.M.I. Electronics Limited, Engineering Development Division, Hayes, Middx. Please quote reference number EL/B.15.

ELECTRICAL ENGINEERS

An appointment is to be made to a Gyro Research Team of a qualified Electrical Engineer with experience in the design and development of small or miniature electromagnetic components such as synchronous motors, torque motors, and signal generators. Experience in the design of electronic test equipment would be an advantage.

The work will involve using the most modern materials and techniques in the design and development of precision electromechanical devices, and their application to miniature gyroscopes and similar instruments.

Please write to the **Personnel Manager (Ref. 689),**
ELLIOTT BROTHERS (LONDON) LIMITED,
Borehamwood, Herts.

A. V. ROE & CO. LIMITED
WEAPONS RESEARCH DIVISION
(Guided Missiles)
WOODFORD, CHESHIRE
TRIALS DEPARTMENT
require three

ELECTRONIC TECHNICIANS

to take charge of technical teams working on Guided Missiles.
Applicants should be prepared to work for short periods in Australia.
Qualifications: H.N.C. or equivalent, and some relevant experience.

Applications to Personnel Manager,
A. V. ROE & CO. LIMITED,
Greengate, Middleton, Manchester
quoting reference WRD/BSB/R.130/W.

TELEVISION INSTRUMENTATION DEVELOPMENT ENGINEERS

DUTIES: To undertake the design and development of test equipment for television, including work on special television camera applications. Considerable personal responsibility and freedom is given, and there are no set rules regarding the number of people engaged on a project, the allocation of project leaders, etc.

QUALIFICATIONS: The ability to design and develop equipment and aggressively progress a project through to the stage where a model is made and the information is available for a production drawing office. Candidates should preferably be of degree standard, or Corporate Members of one of the Professional Institutions, but consideration will be given to others who have considerable practical experience in the field. The ability to progress the project through to a satisfactory conclusion is the prime requirement. Due to expanding activities men with drive and initiative can be sure of progressive advancement.

Comprehensive pension and assurance schemes are in operation and Canteen and Social Club facilities are provided.

Call any day including Saturday mornings at:—
MARCONI INSTRUMENTS LTD.,
LONGACRES, HATFIELD ROAD,
ST. ALBANS, HERTS.

or write giving full details to Dept. C.P.S., Marconi House, 336/7, Strand, W.C.2. quoting Ref. W.W. 2970V.

ELECTRONIC ENGINEERS

We are seeking electronic engineers to participate in original research and development work as members of a highly qualified team working on an extremely interesting range of projects. The essential qualification is an ability to undertake high-grade and original circuit design, making full use of the latest known techniques in connection with both valves and transistors.

The positions offered are permanent with a good commencing salary and excellent prospects of advancement. Attractive pension and life assurance cover under a contributory scheme after a period of probationary service.

The Company is situated in pleasant country surroundings between Esher and Cobham in Surrey, and is well served by train, 'bus and Green Line coaches. Working conditions are ideal with fully equipped laboratories and all the usual amenities of an established and progressive Company—good canteen, medical services, recreation and social club with sports facilities within the premises.

The Chief Engineer would be glad to see you for an exploratory chat in strictest confidence.

Write or telephone for an appointment to:
COTTAGE LABORATORIES LTD.,
PORTSMOUTH RD., COBHAM, SURREY
Telephone: Cobham 3191

TELEVISION RESEARCH AND DEVELOPMENT

A fully qualified and experienced Television Engineer is now required to join an expert team of Engineers engaged in one of the most advanced technical development programmes in the industry. This includes colour research; wide angle scanning; combined T.V./F.M. Radio Receivers; advanced (but realistic) projects.

The well-equipped Laboratories of the Company are situated in a convenient West London district, and a high commencing salary will be offered to the right man. The position is permanent and pensionable, and offers considerable scope for advancement.

Please write (in strict confidence), giving full particulars of experience, qualifications, present salary level, to Box No. 5156, c/o "Wireless World."

VICKERS GROUP
RESEARCH ESTABLISHMENT
DESIGN ENGINEERS

Applications are invited for posts in the central research establishment of the Vickers Group by Design Engineers. Experience in

ELECTRONIC, ELECTRICAL, HYDRAULIC
SMALL MECHANISM, and
MACHINE TOOL ENGINEERING

is a valuable asset in the order as stated.

The Duties of the occupants of the posts are the design and supervision of the construction of both experimental and prototype equipment in conjunction with the Scientists of both the Research and Development Divisions. It is desirable that the Design Engineers take part in the experimental work in the laboratories.

The Minimum Qualifications desirable are Corporate Membership of a Professional Institution.

The Experience necessary varies with seniority. Successful applicants must have complete familiarity with drawing office and workshop practice and be able to work in close liaison with scientists.

Salaries are commensurate with Experience and Qualifications.

Applications should be made in the first place to :

VICKERS GROUP RESEARCH ESTABLISHMENT
BROOKLANDS ROAD
WEYBRIDGE, SURREY

The English Electric Valve Company Limited, Chelmsford

require development engineers in departments concerned with television camera tubes and microwave valves.

Salary up to £1,100 per annum according to experience. Experience in the development and production of similar valves with an Honours Degree or equivalent qualifications essential.

Full details of previous experience, etc., to Dept. C.P.S., 336/7 Strand, W.C.2, quoting Ref. WW 1506M.

SENIOR & JUNIOR ELECTRONIC & INSTRUMENT ENGINEERS

required by expanding Division of **ELLIOTT BROS. (LONDON) LTD.** These posts involve responsibility for design of a wide variety of instruments and process control systems using analogue and digital techniques. They offer rewarding and progressive salaries and valuable experience in the field of industrial electronics. Pension Scheme. Please write fully to:

Personnel Officer, Century Works, Conington Road, Lewisham, S.E.13.

VACANCIES FOR CRAFTSMEN IN GOVERNMENT SERVICE AT CHELTENHAM

Experienced in the maintenance of—

1. Radio Communication Receivers
or
2. Teleprinter, Cypher machines and associated telegraph equipment.

Basic Pay: £9/2/4d. plus merit pay, ranging from 10/- to 70/-, assessed at interview and based on ability and experience.

Opportunities for permanent and pensionable posts. Good working conditions. Single accommodation available.

Apply: **Personnel Officer, (3/R.D.C.), G.C.H.Q., 53 Clarence Street, Cheltenham.**

THE AUSTIN MOTOR COMPANY LTD.

LONGBRIDGE, BIRMINGHAM, 31

have immediate vacancies for two ELECTRONIC ENGINEERS.

They should have qualified to graduate standard.

One will be required to take charge of a section of the Research Laboratories dealing with the application and design of electronic equipment as applied to Machine Tool and Conveyor Control.

The other will be engaged in the application of Electronics to Mechanical Test Equipment and Internal Combustion Engines. Some previous knowledge of vibration and acoustic measurements would be an asset.

The above posts are permanent with good prospects. Salaries will be dependent on qualifications and previous experience.

Applications with full details to:—
PERSONNEL MANAGER.

E.M.I. ELECTRONICS LTD

LABORATORY ASSISTANTS

Laboratory Assistants are required to carry out a variety of interesting development work on electronic and allied devices. The work would suit young ladies with G.C.E. (O or A level) qualifications, preferably in scientific subjects. Experience is not essential: training with opportunities for further education, if required, will be given.

Please apply in the first instance to the **Personnel Dept. (EL/B63) E.M.I. Electronics Ltd., Blyth Road, Hayes, Middx**

TEST ENGINEERS

required for interesting work in connection with Radar, Computers, Machine Tool Control Units, Camera Channels, Microwave Links and similar electronic equipment. Applicants must have sound theoretical knowledge of electronics backed by practical experience in H.M. Forces or industry. Staff positions and Superannuation Scheme. Single accommodation available. Saturday morning interviews by appointment. Apply, giving full details to

Personnel Department (C.E./21), E.M.I. Ltd., Hayes, Middx.

MIDLAND INDEPENDENT TELEVISION STUDIO CENTRE

Applications are invited for:—

TELEVISION ENGINEERS

Duties cover operation and maintenance of Vision Equipment, working on shift basis.

Apply in writing to:—**Alpha Television Services (Birmingham) Ltd.** Attention of **D. J. Whittle,** Engineer - in - Charge. **Television Theatre, Aston, Birmingham 6**

SIEMENS EDISON SWAN
RESEARCH LABORATORY
TRANSISTOR RESEARCH

A senior post is vacant for a

PHYSICIST OR ENGINEER

of wide experience to take full charge of research in the field of transistor physics in the new Siemens Edison Swan Research Laboratory. The successful candidate will be required to plan research programmes of a short- and a long-term nature. The Company also operates development laboratories associated with the engineering departments. Housing is available if required.

Please write for further details to:

Personnel Officer, SIEMENS EDISON SWAN RESEARCH LABORATORY West Road, Templefields, Harlow, Essex.

DEPUTY CHIEF ENGINEER

Required by a well known Company engaged in the Electronics and Communications Industry, situated in the North West London area.

The successful applicant would be required to take charge of the H.F. and V.H.F. Laboratories, including responsibility for the associated Model Shops and Development Drawing Offices. Extensive administrative ability, in addition to recognized technical qualifications and experience in design and development of Radio Communications Equipment, is essential and prospective candidates should have achieved responsible status in their present career and possess attributes which include initiative, drive and leadership.

Engineers at present in receipt of a salary of less than £1,800 per annum should not apply.

The Company operates a Staff Superannuation Scheme.

Applications, which will be treated in strictest confidence, should state date of birth, qualifications, appointments held, and when available.

Box 5490, c/o "Wireless World."

CENTRAL ELECTRICITY GENERATING BOARD

INSTRUMENT ENGINEERS

INSTRUMENT ENGINEERS required in the Electronics and Instruments Section of the Research Laboratories, Leatherhead, Surrey. The Section provides an instrument service for all departments of the Laboratories and duties include the maintenance, calibration and repair of the wide variety of physical, chemical and electrical instruments.

Candidates should have the Higher National Certificate and experience in electronic or nucleonic equipment will be an advantage.

Salaries within scales £820–£995 p.a. or £550–£725 p.a.

Applications stating age, qualifications, experience, present position and salary should be forwarded to S. S. Scott, Chief Personnel Officer, 24/30 Holborn, London, E.C.1 by 30th June. Envelopes should be marked "Confidential" quoting Ref. W.W./115.

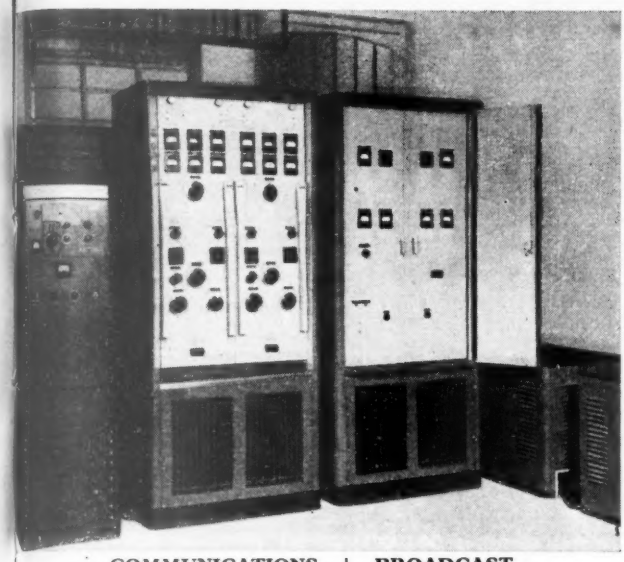

COMMUNICATIONS | BROADCAST

BRITISH SAROZAL LIMITED

CONTRACTORS TO COMMONWEALTH · COLONIAL AND FOREIGN GOVERNMENTS

SAROZAL HOUSE · 1/3 MARYLEBONE PASSAGE
MARGARET STREET · LONDON · W.1

TELEPHONE: LANGHAM 9351 (3 LINES). CABLES: SAROZAL, LONDON

A NEW 5 Kilowatt H. F. Transmitting Station

COMMUNICATIONS
Model AVT-22-C

A low priced, highest quality ground station radio transmitter (telephone, CW & MCW) designed particularly for point-to-point, aviation, police and other communication services. Multi-channel installations.

Already in operation in all climates and latitudes, the AVT-22-C Models now serve as a vital link in aeronautical radio-telephone communications between Helsinki, Stavanger, Kemi, Oslo and Copenhagen.

BROADCAST
Model AVT-22-D

A low priced, high fidelity broadcast transmitter designed to meet most modern broadcast requirements . . . and meeting them! Overall frequency response of ± 2db between 30 c/s and 15 Kc/s with distortion below 4% (including studio equipment).

Write for details of these and also smaller Communications and Broadcast Transmitters to our ENGINEERING DIVISION.

AGENCIES CAN STILL BE OFFERED IN SOME COUNTRIES

A.I.D. APPROVED BSL A.R.B. APPROVED

THE SIGN OF QUALITY

LEO COMPUTERS LTD.

TRAINING TO BE COMPUTER ENGINEERS

Young men with G.C.E. 'A' level in Physics and Mathematics (or equivalent) are offered training to become Electronic Computer Engineers in a young and rapidly expanding organization. This is an excellent opportunity for any one who has completed National Service (or will do so during 1958) to train from scratch to reach positions of responsibility in rapidly expanding field. Applicants should write, giving personal and educational details, and an outline of any experience to:—

Personnel Officer, LEO Computers Limited, Minerva Road, Park Royal, London, N.W.10.

COMPUTER ENGINEER

(Age 20—25).

Required by English Electric to work on a large high-speed electronic computer installation in Central London. Experience on Computers is not essential—specialised training will be given—but candidates should be able to appreciate and understand the overall function of complex electronic equipment. The work is stimulating and requires clear and logical thought; a knowledge of electronics to about H.N.C. standard would be necessary.

Please write to Dept. C.P.S., 336/7, Strand, London, W.C.2, quoting Ref. WW 506B.

MARCONI INSTRUMENTS LTD.

This Company has immediate vacancies at St. Albans in its Technical Literature (Telecommunications) Section; applicants should have electrical engineering qualifications and/or experience in the design or development of electronic equipment; the duties are varied and interesting and the posts provide permanent and pensionable positions in a well-established Company.

Apply to Dept. C.P.S., 336/7, Strand, W.C.2. quoting Ref. WW 2970W.

NORTHERN POLYTECHNIC

SESSION 1958/59

ADVANCED COURSES IN:—

ELECTRONICS AND MICROWAVE PHYSICS
ELECTRICAL DISCHARGES IN GASES
SOLID STATE PHYSICS

Students with a suitable degree in Physics, following one of these courses, accompanied by practical work, can proceed to the M.Sc. degree of the University of London.

The lectures are not confined to such students, but are open to any student working in appropriate fields.

Enquiries should be addressed to the

Head of the Department of Physics,
Northern Polytechnic, Holloway, London, N.7.

Z & I AERO SERVICES LTD.

14, South Wharf Road, London, W.2

Tel.: AMBassador 0151/2

A. R. B. Approved Stockists.

For Fully guaranteed Test and Communications Equipment

FREQUENCY METERS

BC-221, range 125 kc/s to 20 mc/s.
TS-174, range 20 to 280 mc/s.
TS-175, range 80 to 1,000 mc/s.
LR-1, range 160 kc/s to 30 mc/s; Substandard accuracy with interpolating scale.
Prices on application.

KLYSTRONS, type 417A
E_m 1,000 v.; E_c 50 v.; P_m 50 w., wavelength 9.10 cm. **£2 0 0**

MAGNETRONS, type 5J30
E_h 2,500 v., H 1,500 gauss, P 400 w., frequency 375 mc/s; liquid cooling **£2 0 0**

LIGHTHOUSE TRIODE GL-446A **£1 0 0**

MAGNETRONS, 3 cm. Band, type 5J51A.
Price on application.

INSULATION TESTERS

Record "Minor" 500 v. Insulation Tester, complete with leather case..... **£10 0 0**
Eversheds Series 1 Megger Insulation Tester, 500 volts, 40 megohms **£25 0 0**
Eversheds Series 1 Megger Insulation Tester, 1,000 volts, 100 megohms, from... **£27 10 0**
Eversheds Series 1 Megger Insulation Tester, 1,000 volts, 100 megohms, complete with Decade Box, all brand new **£60 0 0**
Eversheds Series 2, 500 volt Megger Insulation Tester in leather carrying case... **£25 0 0**
Eversheds Series 3 Megger Insulation Testers, 500 volt (Wee Meggers) **£12 10 0**
Eversheds Bridge Megger, 500 v..... **£45 0 0**
Eversheds Bridge Megger, 1,000 v. **£50 0 0**
Leather cases for Eversheds "Wee" Meggers **15 0**
All above are fully guaranteed for six months.

MARCONI TYPE TF-329F "Q" METER

Frequency range 50 kc/s to 50 mc/s, "Q" range 10 to 500. Average accuracy ±5% ±5.
PRICE **£75 0 0**



ARMATURE DROP TESTERS (Ex A.M. Ref. 5G/549)

For testing Motor and Generator Armatures, max. dia. of commutator approx. 4in.; max. overall dia. 7in.; max. length approx. 15in.
PRICE **£5/10/-.** Packing and carriage 15/-.

2.5 kVA WELDING TRANSFORMERS

for 230 v. mains. Two output sockets 25 amp and 50 amp at 50 v. Output voltage adjustable by means of "off-load" tappings. Permissible momentary overload up to 100 w. Waterproof input and output sockets.
PRICE, brand new **£15 0 0**
Carriage **£1 10 0**

BEAT FREQUENCY OSCILLATORS

B.S.R. type LO-50, range 0–16,000 c/s, two-dial differential tuning, output approx 0.5 watts, mains operated **£25 0 0**
MARCONI type TF-195L, range 0 to 40,000 c/s, output 2 watts max. undistorted, mains operated **£65 0 0**

MOVING IRON GRADE 1 PORTABLE METERS

8in. Mirror Scale, 160 v. A.C./D.C.... **£5 0 0**
5in. Mirror Scale, dual range, 150 and 300 v. A.C./D.C. **£5 19 6**

RECORDING AMMETERS AND VOLTMETERS

EVERSHED DUAL PEN RECORDING VOLTMETER
Range 160–240 v. A.C., suppressed zero.
Chart 6in. wide continuous.
Chart Drive: spring clock.
Chart Speed: 1in. per hour.
PRICE **£75 0 0**

EVERSHED DUAL PEN RECORDING MILLIAMMETER
Range 0 to 5 milliamps D.C.
Chart 6in. wide continuous.
Chart Drive: electric clock 250 v. A.C.
Chart Speed: ½in. per minute.
PRICE **£75 0 0**

ELLIOTT SINGLE PEN RECORDING MILLIAMMETER
Range 1 mA D.C.
Chart 3½in. wide continuous.
Chart Drive: electric clock 250 v. A.C.
Chart Speed: 12in. per minute.
PRICE **£50 0 0**
All the above Recorders are of Switchboard mounting pattern.

ELLIOTT SINGLE PEN PORTABLE RECORDING MILLIAMMETER
1 mA FSD. Built-in full-wave rectifier for use on A.C measurements. Separate terminals for A.C. and D.C. measurements.
Chart 3½in. wide continuous.
Chart Drive: spring clock.
Chart Speed: 1in. per hour.
PRICE **£35 0 0**

EVERSHED 12-PEN TIME RECORDERS

Portable 12-channel time recorders for simultaneous recording of 12 events, or 11 events and time marks. Chart speed 2in. per second. Chart Drive 24V D.C. motor through a clockwork contactor.
PRICE, Brand New **£30 0 0**

BELOW ARE ONLY FEW OF THE ITEMS WHICH ARE AVAILABLE IN OUR RETAIL BRANCH AT 85, Tottenham Court Road, London, W.1 Telephone: LANgham 8403

Please address all correspondence, mail orders, etc., to our Head Office. When sending remittances, please add 2/- in £ for packing and Postage.

MARCONI ABSORPTION WAVEMETERS. Type TF-643, range 20 to 300 mc/s, accuracy 1 to 2%. PRICE, **Brand New £5 10 0**

ARR-3 FREQUENCY MODULATION RECEIVERS

60 mc/s band. Two RF, two IF, two AF stages; Auto Frequency Control. Easily converted to B.B.C. VHF Band. Complete with circuit diagram, conversion instructions and full conversion kit.
PRICE **£5 10 0**
Demonstration on request.

FEW ONLY AVAILABLE

Marconi CR-100 Receivers..... **£30 0 0**
Marconi CR-150 Receivers, 2 to 60 mc/s, dual superhet **£50 0 0**

Hallicrafter S-27 Receiver, 27.8 to 143 mc/s, FM/AM..... **£32 0 0**

HEADPHONES

CLR, low impedance **5/6**
CHR, high impedance **10/-**
DLR, low impedance, balanced armature **7/6**
DHR, high impedance, balanced armature **15/-**
HS-30/U U.S. Army Lightweight Headse with miniature earplug earpieces... **12/-**
R.A.F. Headset Assy., with electro-magnetic microphone **32/6**
Ditto with Throat Microphone..... **35/-**
H-62 U.S. Air Force Headsets with Boom Microphones **£5**

RECEIVERS R-1155B, with super-slow motion drive **£8 10 0**

P-104 (R-1392) VHF RECEIVERS, 95–150 mc/s. From..... **£3 10 0**

WESTON MULTI-RANGE METERS,

model 564-3C, 1,000 ohms/volt. Voltage ranges 3–30–300–600 v. D.C. Resistance ranges 1–10–100–1,000 k-ohms. BRAND NEW, in leather case, complete with test prods **£4 5 0**

LOUDSPEAKERS

8in. P.M. with multi-tap transformers, speech coil 3 ohms, in handsome wooden cases.
NEW **£1 5 0**
TANNOY Loudspeakers **£1 0 0**

VALVES

Full assortment of valves in stock. Please write for price list.

METERS

2½in. Rd. plug-in type Plain Scale, centre zero, 600–0–600 microamps FSD	12/6
2½in. M.I.A.C. Voltmeter, 300 v.....	20/-
3½in. Rd. FI.M.C., 100–0–100 μA.....	55/-
3½in. Rd. FI.M.C., 500–0–500 μA.....	40/-
3½in. Rd. FI.M.C., 1mA, FSD	50/-
3½in. Rd. FI.M.I., 15 amps, FSD.....	15/-
3½in. Rd. FI.M.C., 120 v. 200 ohms/volt...	15/-
L-R Meters (cross pointer), containing two 100 μA movements	12/6
2in. Sq. FI.M.C., 1mA	20/-
5in. Switchboard patt., round, 0–20 v. M.I. mirror scale	15/-



POCKET VOLTMETER. 3in. scale, dual range 5 and 100 v. D.C., 1 mA basic movement, 1,000 O.P.V., mirror scale. Complete with leather case and test prods. BRAND NEW ... **25/-**

BRAND NEW MICROSWITCHES

Leaf and Button types ..... **2/6 and 2/9 each**

PETROL ENGINES, Single Cylinder, 4-stroke, Air Cooled, 2.3 H.P. at 2,500 R.P.M., complete with muffer & exhaust pipe **£13 10 0**

CRYSTAL MONITORS TYPE 4A, Mains operated; contain built-in power pack with VU-39 Rectifier and the following valves: VR-66, two VR-91, VR-92, CV51 and CV57.
PRICE **£2 10 0**

SELF SERVICE COUNTERS WITH NUMEROUS SMALL COMPONENTS, such as switches, plugs and sockets, condensers, resistors, etc.

EDDYSTONE MAINS POWER PACKS
200/250 v. A.C.:
Output 175 v. H.T., 6.3 v. L.T. **£1 15 0**
Output 300 v. H.T., 200 mA and 12 v. L.T., at 3 amps **£2 8 6**

WE BUY HIGH QUALITY COMMUNICATION EQUIPMENT, TEST EQUIPMENT, AIRCRAFT TRANSMITTER-RECEIVERS, etc.

Wireless World Classified Advertisements

Rate 7/- for 2 lines or less and 3/6 for every additional one or part thereof, average lines 6 words. Box Numbers 2 words plus 1/-. (Address replies: Box 0000 c/o "Wireless World" Dorset House, Stamford St., London, S.E.1.) Trade discount details available on application. Press Day July 1958 issue, Thursday, May 29th. No responsibility accepted for errors.

WARNING

Readers are warned that Government surplus components and valves which may be offered for sale through our displayed or classified columns carry no manufacturers' guarantee: Many of these items will have been designed for special purposes making them unsuitable for civilian use, or may have deteriorated as a result of the conditions under which they have been stored. We cannot undertake to deal with any complaints regarding any such items purchased.

NEW RECEIVERS AND AMPLIFIERS

SHIRLEY LABORATORIES, Ltd., 3, Prospect Place, Worthing, Sussex Tel. 30536. THE TWA/1515 stereosonic tape recording and replay amplifier, separate meter monitoring on record and playback on both channels, 13watts O/P each channel, 96gns. TWA/15 tape recording and reproducing amplifier, 13watts O/P, for Wearite and Collaro decks, 45gns; TW/PA recording and replay pre-amplifier, 30gns; both with valve voltmeter monitoring; type SB/1-15E high-fidelity amplifier exceptionally wide tone-control system, 40mv sensitivity, 20gns; with two inputs and 3-position gram filter, 22gns; specialized amplifiers for the musical and scientific industries including the Mullard 20watt. [0095

AM/FM radiogram chassis and feeders, model A/F834, an 8-valve AM/FM R/G chassis; 4 watts output; attractive coloured dial, latest type valves; model A/F73, a 7-valve AM/FM feeder; both models at keen prices; 3d stamp for literature; trade enquiries invited.—Bayly Bros., 46, Pavilion Drive, Leigh-on-Sea, Essex. [7800

RECEIVERS AND AMPLIFIERS—SURPLUS AND SECONDHAND

AUDIOM 60, acoustic cabinet, Williamson, Baxendall, F.M. unit, pick-ups, spares; £25.—31, Oaks Cross, Stevenage, Herts. [7849

HRO Rx's and coils in stock, also AR88, BC348R, CR100, etc.—Requirements please to R. T. & I. Service, 254, Grove Green Rd., London, E.11. Ley. 4986. [0053

PAMPHONIC Rack Amplifier, 250 Watt output with special 9 valve preamplifier input 3 mikes. H and L impedance input for pick up (little used) spare set valves £120.—Mayes, 22, Phillpotts Av., Bedford. Tel. 4647 after 7 p.m. [7842

1143A equipment less valves and crystals: receiver 71, USW superhet, 9 valve, stages-OSC, doubler, RF, FC, 4-IF, AVC, etc., easily converted to 2m; 3/6 ea., post 3/6; transmitter 50, USW, 5 stages, 2/6 ea., post 3/6; amplifier 165, 2-stage intercom. amplifier and 2-stage P.P. modulator, with 5 transformers, etc.—Annakin, 25, Ashfield Place, Otley, Yorks. [7857

TV RECEIVERS AND AMPLIFIERS—SURPLUS AND SECONDHAND

PHILIPS 600a projection TV, working; £10.—Ham. 5264. [7855

PHILIPS 17in projection televisions available, as taken in part exchange, complete, but not guaranteed; £9/15, originally £92-£120 each.—Tomlins, 127, Brockley Rise, Forest Hill, S.E.23. [0343

TELEVISIONS needing attention, 9in-10in, nearly all makes, 45/- each, carriage paid; 12in televisions, needing attention, £5-10; 15in, £9/10; write for list.—Tomlins, 127, Brockley Rise, Forest Hill, S.E.23. [0344

DYNAMOS, MOTORS, ETC.—SURPLUS AND SECOND-HAND

67 rotary transformers, ex-Government, unused, input 12v DC. Output approximately 475v DC at 90 m.a. Price £3 each, carriage paid. Box 5357 [7813

CRYPTO rotary convertors 460DC to 230AC, 2.5KVA with starter; also several electro dynamic 230DC to 230AC smoothed, boxed, suitable for TV, all O.K., best offers.—G. Hill, Elect. Eng., Tadcaster. Tel. 2253. [7856

DYNAMOS, MOTORS, ETC., WANTED

WANTED, aircraft type generators, 29 volts 3000 watts and 24 volts 500 watts, required in large quantities at keen prices.—Box No. 4848. [7777

TEST EQUIPMENT—SURPLUS AND SECONDHAND

BC.221 frequency meters. Good condition. Tested in our workshops. Complete with original calibration cards. £35 each.—A. J. Whittemore (Aeradio), Ltd., Croydon Airport Surrey. [7612

"seeing" stars with PARTRIDGE

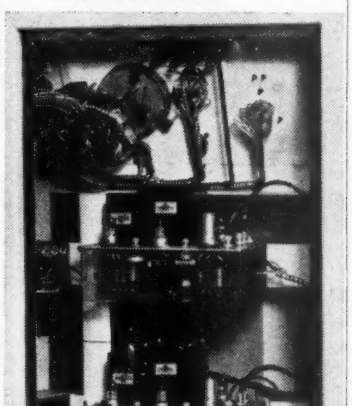

Photographs are reproduced by courtesy of Messrs. Dunford & Elliott (Sheffield) Ltd., suppliers of the electronic equipment.

At top is shown an overall view of the telescope.
Below is a section of the interior of the control equipment.

This Radio Telescope situated at Jodrell Bank and the first of its kind, attracted world fame in tracking the "earth satellites." For work of this nature reliability in operation and in the results achieved are of paramount importance. That is why Partridge Transformers were specified and many hundreds employed in the equipment.

PARTRIDGE TRANSFORMERS LTD.

Roebuck Rd., Chessington, Surrey.
Phone: ELMbridge 6737-8

TEST EQUIPMENT—SURPLUS AND SECONDHAND

6IN. Cathode ray oscilloscope without time base (latter easily added); £15 o.n.o.—Owen, 8a, Barons Court Rd., London, W.14. [7862

SIGNAL generators, oscilloscopes, output meters, valve voltmeters, frequency meters, multi-range meters in stock; your enquiries are invited.—Requirements to R. T. & I. Service, 254, Grove Green Rd., London. E.11. Ley 4986.

FOR sale, Marconi TF373 impedance bridge £37/10; Marconi TF517-F/1 signal generator £7/15; TF340 output meter £19/10; Weston 785 multi-range meter £9/10; Murphy teacher unit, echo generator and bearing conversion unit, £12/10.—Wallace, 6, Howard Street, Edinburgh. [7843

NEW COMPONENTS

A BRAND new list for June that will make your eyes pop! Free and post free to dealers; send your bill head; trade and export only supplied.—A.W.F., 10, Sackville St., Bradford, 1. [0132

CRYSTAL microphone inserts with exceptionally high output (Cosmocord Mic. 51, guaranteed newly made and boxed. 15/6 post free.—Radio-Aids, Ltd., 29, Market St., Watford, Herts [0170

COMPONENTS—SURPLUS AND SECONDHAND

SOUTHERN RADIO SUPPLY, Ltd., 11, Little Newport St., London, W.C.2. See our displayed advertisement page 156.

A COMPONENT Surplus. 1040 only 1000 Uf 6v DC Hunts Electrolytics; 1/- each.
250 only 250 uf 6v DC Hunts Electrolytics; 6d. each.
796 Bulgin On-Off switches; 1/- each.
483 Bulgin Station Selection Switches S438; 1/- each.
400 Acro Pigmy Neon Lamps; 2/6 each.
1500 only 2.5 amp Belling Lee Cartridge Fuses 3/16×¾, 2½d. each.
400 only 1 amp Belling Lee Cartridge Fuses 3/16×¾, 1½d. each.
500 only 6v. Solenoid Coils; 6d. each.
ALL the above surplus components are offered as new and unused stock. To be supplied in any quantities cash with order.—Apply 61-62, Grange Road, Leyton, E.10. [7818

HOW to use ex-Gov. lenses and prisms. Nos. 1 and 2 2/6 ea; vertical enlarger plans for 35mm to 2¼sq 3/6 ea; optical condensers and Achromatic lens to suit 35/-; lists, s.a.e.—H. W. English, Rayleigh Rd., Hutton, Essex. [0126

MAGSLIPS at low prices, fully guaranteed, 3 in Resolver No. 5 (AP 10861), 50v. 50c/s, unused each in tin, 35/-, post 2/1; large stocks of these and other types.—P. B. Crawshay, 94, Pixmore Way, Letchworth, Herts. Tel. 1851. [0087

ILLUSTRATED Catalogue No. 13 containing over 450 items of Government surplus and model radio control equipment, 2/2, refunded on purchase of goods, 2/6 overseas sea mail.—Arthur Sallis Radio Control, Ltd., Department W.W., 93, North Rd., Brighton. [0193

4½in sq. moving coil voltmeters basic 350 u/A, 300 or 250v plain scale 32/6 P/P 2/-, 100, 10 or 2v mirror scale 35/- P/P 2/- Chokes; ½A 3H 25Ω 8/- P/P 3/-, 100 mA 15H 85Ω 4/6 P/P 1/9, 1.5A LT 3½Ω 3/6 P/P 1/6, 5H 80 mA 4/- P/P 1/6. Transformers 410-0-410v 100 mA, 330-0-330v 75 mA, 5v 3A×3 230v in 50/- carr 5/-; Heater 6.3v 3A×6, 6.3v 1.6A×8, 6.3v 0.3A×6, 12v 3A, 5v 3A×3, 230v in 22/6 carr. 5/-. Advance CV type, input 190 to 260v, output constant 230v with capacitor 150W £3/10/0 carr 5/-, 250W £4/12/6 carr 7/6, 500W £6/10/0 inc. carr.
ELLIOTT MC min. relay, 2×350Ω, sens. ½/0/½ mA 15/- P/P 9d, WW pots, 5k, 10k, 25k, 50k, 3W 1/6, 5W 2/- P/P 6d.
NEUCLEX Co., Ltd., 44, Oak End Way, Gerrards Cross. Tel. 3296. [7867

NEW GRAMOPHONE AND SOUND EQUIPMENT

CINE-VOX disc recording mechanisms for L.P. or standard operation from 30gns.-56gns.; also complete tape/disc or direct channels from 50gns.-112gns.
DEMONSTRATIONS can be arranged in London.—For full details write to K.T.S., Ltd., "Coplow," Park Rd., Braunton, N Devon. Callers by appointment only. [0210

FOR SALE AND WANTED ADVERTISEMENT FORM TURN TO PAGE No. 173

SOLDERING EQUIPMENT BY

LITESOLD
REGD. TRADE MARK

PRECISION SOLDERING INSTRUMENTS for the ELECTRONICS INDUSTRY

- Comprehensive range
- Robust & Reliable
- Light weight
- Rapid heating
- Bit sizes 3/32in to 3/8in
- All voltage ranges 6/7v to 230/250v
- Prices from 19/6

Illustrated is the 25w 3/16in replaceable bit model with safety shield.

British and Foreign Patents. Registered designs. Suppliers to H.M. and Foreign Governments. Agents throughout the world.

Brochure No. S.5 sent free on request.

Sole proprietors and manufacturers:

LIGHT SOLDERING DEVELOPMENTS LTD
106 George Street, Croydon, Surrey
Phone: CROydon 8589 Grams: Litesold Croydon

● **AERIAL EQUIPMENT.** Poles, Masts, Dipples, Yagi, Microwave arrays. Whips, 12in Whips to 90ft. Masts.

● **CABINETS AND RACKS.** 36in. to 96in. high, standard 19in. wide.

● **CONDENSERS** up to 10,000 mfd. and 50 kV.

● **FUSES.** Cartridge and E.S ¼ amp. to 600 amps.

● **INSULATORS.** 80 different patterns.

● **LOUDSPEAKERS** 3in. dia. to 50 watt Theatre Systems

● **METERS** 2in. to 12in. dia. 120 different types.

● **POWER SUPPLIES.** Generators, Rectifiers, Vibrators, Inverters, Dynamotors from 2 volts 100 amps. to 36,000 v. ½ amp.

● **RECEIVERS.** 80 types available from 15 kc/s. to 600 mc/s. including portable, D.F., Table Rack and Pedestal.

● **TEST GEAR,** American, over 100 different types, Meters, Calibrators, Signal Generators, etc.

● **TELEPHONE AND TELEGRAPH EQUIPMENT.** Single- and multi-channel apparatus, filters, switchboards, power supplies, perforators, printers.

● **TRANSFORMERS** Audio and Power, 200 types from 2 volts to 18,000 volts and up to 15 kVA.

● **TRANSMITTERS**, 60 different types from UF-1 Handie Talkie to G-50, 2,500 watts.

FULL LISTS AVAILABLE

Send your requirements. All packing and shipping facilities.

P. HARRIS
ORGANFORD, DORSET
Telephone: LYCHETT MINSTER 212

NEW GRAMOPHONE AND SOUND EQUIPMENT

TAPE recorders, Ferrograph, Vortexion, Brenell, Telefunken, M.S.S., Truvox, and Reflectograph.
TAPE decks, Wearite, Brenell, Truvox, Dulci Harting, Sonomag Adaptatape (Collaro).
AMPLIFIERS and tuners, Leak, Quad, R.C.A., Dulci, Dynatron; microphones, Reslo, Acos, Philips, Labor, etc.
ALL tapes and accessories; audio service dept., and recording studio, hire-purchase facilities available.
LAMBDA RECORD Co., Ltd., 95, Liverpool Rd., Liverpool, 23. Great Crosby 4012. [7749

TANDBERG stereophonic tape recorder now being demonstrated by appointment at Grifhano Studios. (See below.)
FERROGRAPH, Harting and Vortexion tape recorders for sale or hire; may we arrange to demonstrate these superb instruments to you; easy terms available.—"Grifhano" Studios. (See below.)
RECORDING studio available for personal recordings on disc or tape, dubbing service, mobile recording unit for all functions, etc.—Write or 'phone: Griffiths Hansen (Recordings), Ltd., 24-25, Foley St., London, W.1. Mus. 2771/6375. [7722

GLASGOW.—Recorders bought, sold, exchanged, cameras, etc., exchanged for recorders or vice versa.—Victor Morris, 406, Argyle St. Glasgow, C.2. [0201

TRANSISTORISED 10w amplifiers for fixed, portable and mobile use, size only 7¼in×4¼in×2¼in; complete details from—The Laventa Sound Co., Sales Division, 24, Arden Rd., Birchfields, Birmingham, 6. [7807

TAPE recorders for home and industry: Brenell, Mk. V, 68gns; Ferrograph recorders from 79gns; Leevers-Rich from £450 according to specification; Standard and L.P. tapes; high quality mics., "Cadenza" Reslo, etc.; speakers, tuners, etc.; tape/disc and complete recording service.—"Eroica" Sound Recording Services (1949), 31, Peel St., Eccles, Manchester. Eccles 1624. Director: Thurlow Smith, A.R.M.C.M. [0122

GRAMOPHONE AND SOUND EQUIPMENT—SURPLUS AND SECONDHAND

TRUVOX stereo head, nearly new; £6/10; Klipschorn speaker, walnut; £40.—Ham. 5264. [7854

BRENELL Mk. IV. deck and pre-amp, shop soiled, only £30; Lowther BT4 tuner, £15. —Eroica, see under "New Gramophone equipment." [0123

EMI portable tape recorder (L2b) battery operated; as used by B.B.C.; bought for research, 100gns, and scarcely used; accept £63. —Dr. Morey, Grove, Lincoln. [7832

AC/DC Garrard RC75, as new, £17; AC/DC 5 valve radiogram chassis, £3; AC/DC 5 valve 10 watt Hi-Fi amplifier, £5; DR Junior amplifier as new, £17.—36, Melthorne Drive, S. Ruislip. [7861

TAPE RECORDING, ETC.

TAPE to disc, Queensway Recording Studios, 123, Queensway, W.2. Bay. 4992. Recorders serviced and for hire. [7421

RENDEZVOUS RECORDS offer comprehensive 78/LP tape to disc recording facilities. —Leaflet from 19 Blackfriars St., Manchester, 3. [7402

TAPE to disc recording.—L.P. (30 mins.), 27/6; 78s, 13/6, 48-hour service, s.a.e. leaflet.—Marsh, Little Place, Moss Delph Lane, Aughton, Ormskirk, Lancs. Aug. 3102. [7782

BRAND new recording tape, 1,250ft 7in reels, boxed at 19/6 ea.; p. and p. 1/3; money refunded if not satisfied.—A. Marshall, 18, Cricklewood Brdwy., N.W.2. Gla. 0161. [7764

TAPE/DISC/TAPE.—If quality and durability matter (especially with LPs) consult Britain's oldest full-time transfer service (1952 rates); limited quantity new 1,800ft LP tape 37/6, 1,200ft standard 25/-, post free; use our mixer units for improved tape recording.—Sound News, 10, Clifford St., London, W.1. [0192

THE tape recorder specialists offer wonderful bargains in tape, famous British make, 7in 1,200ft 22/6; 5¼in 850ft 19/6; 5in 850ft (l.p.) 19/6; 5in 600ft 14/6; each plus p. & p. 1/6, send now only 500 reels available; tape recorders bought for cash, all makes stocked, no interest terms, free offers, specialised repair service.—E. C. Kingsley & Co. (F) 132, Tottenham Court Rd., London, W.1. Euston 6500. [7314

VALVES WANTED

ALL types of valves, British or American, transmitting and receiving; keenest cash prices paid; what have you to offer?—Write or call, Lowe Bros., 9a, Diana Place, Euston Rd., N.W.1. [7848

WANTED. EXCHANGE, ETC.

FERROGRAPH tape recorders wanted, any model.
RADIO DEVELOPMENT, 26, Queen St., Belfast. [7868

EAP1 or 1805-P1 tube wanted.—Swinnerton, 29, Station Ave., Filey, Yorks. [7860

WANTED Garrard or connoisseur transcription unit variable speed G.E.C. 912 plus amplifier. [7808

VALVES (new), tape recorders, test equipment, any quantity.—Stan Willetts, 43, Spon Lane, West Bromwich, Staffs. Tel. Wes. 2392. [7079

BENSON'S BETTER BARGAINS

TRANSFORMERS: Input 230 v. 50 c. Outputs 620-550-375-0-375-550-620 v. 200 mA. and 250 mA. simultaneously available, +5 v. 3 A. twice. New, 24 lb. nett. **23** del'd. mainland. **SPEAKERS:** 5in. in case, **25/-**, uncased **18/6** (p.p. 2/6). **DRIVES:** slow-motion, Admiralty, 200:1 ratio, scaled 0-100, **5/6**. Muirhead, 4in. dial (brass), **7/6**. **R1155B.** Good condition, fully valved; tested, with "N" drive; handbook supplied, **27/10/-** (rail 10/-). **CR100, KIT OF SPARES,** including 15 valves, **£3**. Brand new; power transformers, **30/-**. **POWER UNIT.** 301 input 200/250 v. Outputs: 250 v. 75 mA., 24 v. 1 A. D.C. and 6.3 v. A. A.C. New, cased, with plugs, **45/-** (p.p. 3/6). **COMMAND RECEIVERS,** brand new, 6 valves, med. wave (0.52-1.5 mc/s), **97/6**; used **82/6** (post 3/6). Conversion data and circ., to CAR RADIO, **1/6**. **I.F. STRIP 373,** new, with valves, **37/6**. **RELAYS,** coaxial, "F/d," 12 v., **10/-**; set 3 plugs, **1/6**. **VIBRAPAKS** 6 v. D.C. to 250 v. 80 mA. smoothed, cased, **22/6** (post 3/6). **VIBRATORS,** Mallory G629C 12 v. 4-pin, **7/6**. **BRAND NEW R.F.26, 20/-** (post 2/-); **RF27,** good cond., **18/-**. **DYNAMOTORS** (post 3/6); 12 v. to 250 v. 65 mA. and 6.3 v. 2.5 A., **11/6**; 6 v. to 250 v. 80 mA., **12/6**; 11 v. to 200 v. 50 mA. and 13 v. smoothed, filtered, cased, **15/-**; **"Command"** type 28 v. to 250 v. 60 mA. (rail), **7/6**. **R1155 S.M. DRIVES "N"** type, new, **10/6**. **TEST METERS.** New, 4×4×2½in. Read 1.5 and 3 v., 60 mA. and 5kΩ, **12/6**. **METERS,** contain 2 separate micro-amp movements and 2 neons, new, **8/6**. Cross-over needle (L/R), 100μA each section; good condition, **8/6**. **R.F. UNIT** with 2/EF91, 1/EF93, motor tuned (20-45 mc/s), I.F. 15 mc/s, new, **30/-** (p.p. 3/6). **CAMERA CONTROLS.** Type 35, a photographic timing device, 24 v. motor. New, **15/-** (p.p. 3/6). Inert **CELLS,** 1.5 v. **1/3**. **HEADSETS DLR3,** pair, **7/6**; DLR5 with throat mics., **10/6**. **CONVERTORS** (Rotary) 110 v. D.C. to 50 v. A.C. **23** (rail 7/6). **Mic Inserts.** G.P.O., carbon, **2/6**. **EARPIECES,** inserts, bal. armature type, **2/6**. **OPTICS.** Periscope heads **2/6**; Episcopes, **5/6**; Telescopes, sighting, **10/-**; Periscope mirrors, mounted, **6d.** **BLOCKS,** Grelco, 10-way, **2/-**. **CONDENSERS:** variable 150pf. single **2/6**; electrolytics 16 mfd. 500vw, **1/6**, 25mfd 12vw, **6d.** **SUPPRESSORS,** radio interference (AM), **5/6**. **INDICATORS,** Type 196 with one each, 6¼in. and 3in. CRTs etc., **50/-** (rail 10/-.) **BREAST MICS.,** sound powered, with switch, **5/6**. **ROD AERIAL HOLDERS** for ¼in. rods, **2/6**; 12in. coppered rods, ¼in. dia., **3d.**

LIST AND ENQUIRIES: S.A.E. please! Terms, C.W.O. Postage extra. Immediate despatch.

Callers and Post: **W. A. BENSON (W.W.)**
136 Rathbone Road, Liverpool, 13. *SEF 6853*
Callers: **SUPERADIO (W'chapel) LTD.**
116 Whitechapel, Liverpool, 2. *ROY 1150*

THEY SAY—

One—

"I have now been the owner of a Duode for some months. I have nothing but praise for it. I have heard most of the good quality loudspeakers produced over the last 25 or 30 years and can honestly say that for normal home use I know of nothing better than a Duode. The balance of high and low frequencies is excellent and the transient response, due no doubt to the eddy current effect on the metal tube on which the coil is wound, is unsurpassed."

Another—

"However much and often I listen to my Duode, I never fail to get some new joy—that is, when I hear another familiar sound come out just like it is in real life. I suppose I shall in time lose the thrill and settle down to contentment, but maybe even then the spark will come out now and then to remind me how good it all is."

And Another—

"The Duode is the only English piece of equipment which lives up to, and surpasses, its claims. I have never struck a truer claim than yours, i.e. natural reproduction. It stands up to the hot and humid climate perfectly and has given many hours' pleasure to myself and my friends."

Need we add to these comments from happy Duode owners? Would you like to try a Duode for yourself? Then write to our temporary address for full details :—

DUODE LTD.
BCM/DUODE, LONDON, W.C.1

Smith's of EDGWARE ROAD

ELECTRONIC COMPONENTS DISTRIBUTORS FOR OVER 25 YEARS

FOUR-SIDED BLANK CHASSIS

Made in our own works from commercial quality half-hard aluminium of **16 s.w.g. thickness** these chassis will carry components of considerable weight and normally require no corner strengthening.
We are now able to supply **same day** any size of chassis in ½in. steps up to 17in. Depths 1", 2", 1", 1½", 1½", 2", 2½", 2½", 2½", 3" at the following rates:—

48 sq. in.*	4/-	176 sq. in.	8/-	304 sq. in.	12/-
80 sq. in.	5/-	208 sq. in.	9/-	336 sq. in	13/-
112 sq. in.	6/-	240 sq. in.	10/-	368 sq. in.	14/-
144 sq. in.	7/-	272 sq. in.	11/-	and pro rata.	
Post 1/3.		Post 1/6.		Post 1/9.	

(*Length plug twice depth × width plus twice depth.)

STOCK SIZES

6"×4"×2" 5/-, 7"×5"×2" 5/6, 10"×4"×2½" 6/9, 9"×7"×2" 7/-, 12"×4"×2½" 7/3, 10"×8"×2½" 8/6, 12"×5"×3" 8/6, 12"×7"×2½" 8/9, 13"×8"×2½" 9/9, 14"×7"×3" 10/6, 14"×10"×2½" 11/6, 15"×10"×2½" 11/9, 17"×10"×3" 14/-.

½in. flanges on two sides (inside or outside) 1/6 extra. Soldered corners (new process) 2/- extra.
Panels any size up to 3ft. at 4/6 sq. ft. (sq. in. × ¼d.).
Full particulars on request.

Close Tolerance Wax-protected Silver Mica CAPACITORS

Values stock (pF):—
5 22 47 75 130 180 270 370 515 635 815 3000
10 25 50 80 135 200 280 386 538 670 820 3300
11 27 56 82 140 220 300 400 540 680 1000 3500
13 28 60 100 145 225 316 410 556 703 1500 4000
15 30 65 110 150 230 330 450 560 710 2000 4700
18 33 68 120 160 245 340 470 660 750 2200 5000
20 40 70 125 175 250 356 500 603 800 2500.
Tol. up to 33pF 1 pF, over 33pF 1 per cent.

PRICES: 5-300 pF 9d.; 316-820 pF 10½d.; 1,000:-2,500 pF 1/3; 3,000-5,000 pF 1/6.
Special (limited number only), 0.1 mfd. 1%, 12/-.

***DALY** guaranteed **ELECTROLYTICS**
Full range from 1/6 ea.

***HIGH STABILITY RESISTORS.** "T.S.L." ¼-watt 10% tol., 5-year guarantee. Full "perferred value" range, 12Ω to 10MΩ. 6d. each. Pairs matched to within 2%, 3/- pair.

***SURPLUS STOCKS,** various makes:—

	5%	2%	1%
¼ watt	7½d.	10d.	1/3
½ watt	9d.	1/-	1/6
1 watt	10½d.	1/3	1/9

*** ELECTROVOICE** " guaranteed **TRANSFORMERS AND CHOKES.** Individually tested. Fully shrouded. Used by leading laboratories. 66 types in stock.

The COOPER-SMITH HIGH FIDELITY AMPLIFIER

Model BP1 Main Amplifier, £14/17/-. Build-it-yourself £12/12/-. Mk. II Pre-amp. and Control Unit. £11/3/-. Built-it-yourself £8/3/-.

DIRECT FROM MAKER TO USER

A better 10 watt amplifier at lower cost. Send for illustrated booklet giving full constructional details of this remarkable outfit, 2/8 post free, or hear it in our demonstration room.
Other Hi-Fi equipment includes Acoustical, Leak, Rogers, Lowther, Goodmans, Wharfedale, Lorenz, Philips, Connoisseur, Collaro, Garrard, Goldring, E.A.R., Jascon, C.Q., Harting.

RELAYS 600 type 3/6 each.
2-make, 3000 Ω coil.
1-make, 1 c/o, 150Ω coil.
1-break, 1 c/o 1 c/o (M before B) 150Ω coil.

VISUAL INDICATORS, type 3 (10Q/4) containing two micro-amp movements. Brand new, 6/6 each. With neon lamps (two) 9/6.

MANSBRIDGE CAPACITORS. 200 V. D.C. wkg: Suitable for crossover units, etc. .5 mF., 4d. each; 1 mF., 6d. each; 2 mF., 6d. each; 4 mF., 9d. each.

LIGHTWEIGHT HEADPHONES: 2,000Ω. 12/6 pr. 4,000Ω 17/6 pr.

MINIATURE MAINS TRANSFORMER. Pri. 0-200-220-240 v. Secs. 250 v. 40 mA., 6.3 v. 1.5 amp. Stack size 2¼×1¼×1¼in. 10/6.

BELLING-LEE L430 PROTECTIVE SWITCHES. 3 amp. 1/3.

T.C.C. VISCONOL CATHODE RAY CONDENSERS. .01 mfd. 12.5 kv. type CP57VO, 4/6.

LOUDSPEAKER FABRIC. Brown with gold thread. 2/6 per sq. ft.

Please add approx. cost of postage.

*Lists available.

H. L. SMITH & CO. LTD
287/289 EDGWARE ROAD, LONDON W.2
Telephone Paddington 5891

WANTED, EXCHANGE, ETC.

WANTED, Magnetophon German tape recorder deck or parts, need not be working.—Details to "Willow Cottage," Itchingfield, Sussex. Tel. Slinfold 324. [7827

WANTED, HRO coils, Rxs., etc., A.R.88s, BS348s, S27s, etc.—Details to R. T. & I. Service, 254, Grove Green Rd., London, E.11. Ley. 4986. [0163

A BETTER cash offer for brand new valves, speakers, components, test instruments, etc., that are surplus to your needs.—R. H. S., 155, Swan Arcade, Bradford, 1. [0190

URGENTLY wanted, manuals or instruction books, data, etc., on American or British Army, Navy or Air Force radio and electrical equipment.—Harris, 93, Wardour St., W.1. Gerrard 2504. [7508

WANTED, BC610 Hallicrafters, E.T.4336 transmitters, BC312 receivers, BC221 frequency meters and spare parts for all above; best cash prices.—P.C.A. Radio, Beavor Lane, Hammersmith, W.6. [0079

WE wish to purchase good quality radio sets, wireless equipment, test gear, tape recorders, record players, etc., etc., if possible; please call at shop with good, otherwise give all details with price required in first letter.—WALTON'S WIRELESS STORES, 46, 47, 48, 49, Stafford St., Wolverhampton, Staffordshire. [0102

WANTED, good quality communication RYS tape recorders, test equipment, domestic radios, record players, amplifiers, valves, components, etc., estb. 18 years.—Call, send or 'phone Ger. 4638, Miller's Radio, 38a, Newport Court, Leicester Sq., W.C.2. [7074

PROMPT cash for the purchase of surplus stocks of televisions, tape recorders, radios, amplifiers and domestic electrical appliances of every description; substantial funds available.—Spears, 14, Watling St., Shudehill, Manchester. Blackfriars 1916. Bankers: Midland Bank, Ltd. [0216

REPAIRS AND SERVICE

MAINS transformers rewound, new transformers to any specification.
MOTOR rewinds and complete overhauls; first-class workmanship; fully guaranteed.
F.M. ELECTRIC Co., Ltd., Potters Bldgs., Warser Gate, Nottingham. Est. 1917. Tel. 54898. [0113

USE Jefco coil winder, cheapest machine on the market.—Details, 170, London Rd., Southend-on-Sea. [0174

MAINS transformers, E.H.T.s, chokes, field coils, etc., promptly and efficiently rewound or manufactured to any specification; 12 months' guarantee.
LADBROKE REWIND SERVICE, Ltd., 820a, Harrow Rd., London, N.W.10. Tel. Ladbroke 0914. [0222

TRANSFORMERS to any specification. Singles, rewinds, small or large batches; quick and efficient service, competitive prices, estimates by return of post, from:
MESSRS. Newman & Son, 1, Grove Crescent, South Woodford, E.18 [0330

ELECTRONICS Engineer, specialist British-American test equipment, would undertake to service electronic test and measuring instruments on site, London area; write—Box 5864. [7859

RENEW to stock your faulty speakers of all sizes, pressure units, microphones, coils, fields and cone assemblies in cartons.—D. C. Boulton, 134, Thornton Rd., Bradford, 1. Telephone 22838. [0171

WE have in stock 1,000s and 1,000s of service sheets for sale or hire; these are the actual ones used by the trade; please send s.a.e. with enquiries.—M. Foy, 6, Wykebeck Gardens, Leeds, 9 [1206

ARMATURE rewinding service to the trade; vacuums, drills, grinders, hood driers, dental and washing machine motors; vacuum cleaner armatures replaced from stock; 24 hour service; every job guaranteed; all vacuum cleaner parts, bearings, etc. in stock for any make; complete overhauls our speciality.—Regam Electric, Ltd., 39a, Boar Lane, Leeds 1. [7708

MISCELLANEOUS

CABLE: 10% to 20% under price, full or part coils cheap fluorescents from 32/9d; catalogues.—B.D.C., 591, Green Lanes, London, N.8. [7710

20000 accumulators, 2volt 16a.h., with urspillable vent; 2/- each to clear. 550 Tannoy & Truvox Loud hailers; 10/- each to clear.
80,000 flashlamp bulbs. 1.5, 3.5, 4.3, 6.3 and 12v; 8/- per 100 to clear.
W. F. LEE, Ltd., 115-117, Shepperton Rd., London, N.1. Tel. Canonbury 3933. [7847

RELAYS Post Office type 250 ohms with 2 NO and 1 NC contacts approximately 3,000 available for quick sale.—Hampson Industries, Ltd., West Bromwich. [7844

METALWORK, all types cabinets, chassis, racks, etc., to your own specification; capacity available for small milling and capstan work up to 1in bar.
PHILPOTT'S METAL WORKS, Ltd., Chapman St., Loughborough. [0208

VALVE cartons—we can supply from 12 to 100,000 off the shelf; plain white or printed; miniatures 10/-, G.T.s 12/-, G.s 14/- per 100 plus 2/- postage; also printing done to your special requirements; quotations gladly given.—J. & A. Boxmakers, 75a, Goodwin St., Bradford, 1. [0054

Armstrong

AF105 CHASSIS

CUSTOM-BUILT INTO A COMPLETE RADIOGRAM

For those who want high quality reproduction without the "do-it-yourself" work that is normally involved, we offer the audio perfection of the AF105 Amplifier (with AM and FM radio) in an acoustically designed non-resonant cabinet with a choice of good quality speaker and gramophone units as shown below.

The Standard AF105 Radiogram

The basic equipment comprises the AF105 in the STANDARD cabinet, with adjustable reflex chamber. Alternative gramophone units (GOLDRING GL56 Transcription Unit or COLLARO RC457 Autochanger) and 10in. speakers (WHARFEDALE Golden or GOODMAN T47) can be fitted to choice.

PRICE SCHEDULE

1. **With RC457 and T47..... £88 4 6**
2. **With RC457 and GOLDEN £94 10 6**
3. **With GL56 and GOLDEN.. £104 0 6**

Addition of Plessey SIX-FOUR Tweeter and Cross-over Unit to any of the above combinations £4/5/6 extra.
AF105 £37. Cabinet available separately.

In each case the results represent a very close approach to genuine high fidelity performance and of a much higher standard of listening than is possible from ordinary commercial radiograms. Hear them for yourself at our Holloway Demonstration Rooms (open weekdays and Saturdays until 6 p.m.), or, if you are unable to visit us, take advantage of our 7-day free home trial arrangements.

ARMSTRONG

WIRELESS & TELEVISION CO. LTD.
WARLTERS ROAD, HOLLOWAY, N.7

Telephone: NOR 3213

POST OFFICE TYPE LINE EQUIPMENT

POWER SUPPLY RECTIFIERS for Telegraph Systems, various types.
TELEPRINTERS: Perforators, Auto Transmitters.
SUPPRESSION FILTERS, Telegraph Relays, MC Capacitors and all manner of teleprinter spares.
LINE EQUALIZER UNITS: Attenustors, By-Pass Filters, Recording Bridges, Distortion Testers, Spark-Gap Protectors.
SWITCHBOARDS and spare parts, including Privacy Desk Tests.
CARRIER TERMINALS and Repeaters, Speech + Duplex, 1 + 1, 1 + 3 and 1 + 4, Diversity Combining Units and all manner of spares.
FREQUENCY FILTERS, Coils Inductance, Repeating, Retardation and Hybrid Transformers and close tolerance capacitors.

LOW POWER RADIO STATIONS (Ground Use)

COLLINS 18Q SERIES. 1½ to 12 Mc/s. RF Output 25 watts. Power Units for 12 v., 24 v., 115 v. D.C. and 115 v. and 230 v. A.C.
WIRELESS SET No. 19. 2-8 Mc/s. and 235 Mc/s., all ancillary equipment and RF Amplifier No. 2, Mk. 2.
WIRELESS SET No. 31. Manpack Walkie-Talkie, 40-48 Mc/s.
WIRELESS SET No. 62. Lightweight Communications Set, 1¼-10 Mc/s.
WIRELESS SET No. 83. Manpack or Truck Walkie-Talkie 40-42 Mc/s., 4 channel.
AN/GRC SERIES. Sets and spares available.

LOW POWER RADIO STATIONS (Airborne Use)

SCR-522. 4-channel, 100/156 Mc/s., complete with all operating and test equipment.
AN/ARC-1. 20-channel, 100/156 Mc/s.
TR1934, 1935 AND 1936 Series Equipment, Sub-Units available.
RADIO COMPASS SCR-269G. All ancillaries and spares stocked in large quantities.
COMPONENTS: Capacitors, variable and fixed up to 2 mfd. at 10,000 volts. Transformers Heavy Duty, Rectifier various, Carbon brushes, Magslip Hunters, Ball races, Potentiometers, Test Meters.

R. GILFILLAN & CO. LTD.
7, High Street, WORTHING, Sussex.
Tel.: WORTHING 8719 and 30181.
Cables: "GILL WORTHING" Codes: "BENTLEY'S 2nd"

TRANSFORMERS

Built to your specification, up to 10,000VA. Singly or in quantities. Guaranteed two years. Early delivery.

NOTTINGHAM TRANSFORMER SERVICE
173 Wollaton Street, Nottm. *Tel: 41992*

build your own
TAPE RECORDER
with the
'ASPDEN'
tape deck kits

Two models, 5in. or 7in. spools, two speed, twin track, ferroxcube heads, finest motor, and complete assembly instructions.
Compact model 582 kit..... £8 5 0
Standard model 782 kit..... £9 5 0
Assembled and tested 30/- extra.
And the
RECORD/REPLAY AMPLIFIER KIT, 2½ watt, neon indicator, without valves, £5/18/-.
POWER PACK KIT for above, less valve, £2/18/6.
Carr. extra.

Mr. E. D. S., of Nottingham, writes:—
"The performance of the deck is equal to that of many of the more expensive recorders and friends who have recorders of their own to whom I have lent some of my recordings are amazed at them."
This deck and amplifier is being used in the Antarctic by an expedition member.
Send stamp for full particulars to:—
W. S. ASPDEN
Stanley Works, back Clevedon Road, Blackpool, Lancs.

MISCELLANEOUS

AVAILABLE new surplus.—3,000 hand sets No. 2, sound powered, for inter-coms., etc.; 2,000 hand microphones No. 8A; 2,000 pairs double DLR5 headphones; all available at low prices to clear.—Write Pype-Hayes Radio, 606, Kingsbury Rd., Birmingham, 24. Erd. 4942. [7740

NOTICES

BRITISH SOUND RECORDING ASSOCIATION. Details of membership, open to the professional sound recording engineer and all others interested in recording high quality reproduction and other branches of audio engineering, together with details of the London lecture programme and the Manchester, Portsmouth and Cardiff Centres, may be obtained from the Hon. Membership Secretary, W. J. Houlgate, A.M.I.E.E., 12, Strongbow Rd., Eltham, S.E.9. [0031

PAINTS, CELLULOSE, ETC.

PANL, recognised for many years as the unique one-coat black crackle finish, brush applied, no baking; available by post in 1/8 pint cans at 3/9 from: G. A. Miller, 255, Nether St., London, N.3. [0260

BUSINESS OPPORTUNITIES

MANUFACTURING; advertiser wishes to purchase a small workshop making amplifiers, radio chassis etc., in the Lancashire or Yorkshire area; alternately would like to meet person with a view to partnership.—Box Number 4969. [7786

WELL-KNOWN firm of precision engineers and instrument makers (London area) are desirous of entering into a licence agreement or purchasing outright, Patents relating to electrical and/or mechanical devices of a precision instrument character, or of a consumer goods nature; adequate capital and production facilities are available to develop, produce and market suitable devices.—Communications should be addressed, in the first instance, to Major S. F. M. Neill, Louis Newmark, Ltd., Croydon, Surrey. [7770

CAPACITY AVAILABLE

P.T.F.E. and plastics machining and moulding, A.I.D. approved.—Bel Sound Products, Marlborough Yard, London, N.19. Tel. Arc. 5078. [0185

WORK WANTED

SATURABLE reactors, transductors and complete control systems manufactured to customer's requirements; write for details of new magnetic techniques applied to servo systems, constant current for vellodynes, etc., and series negative resistance units.—Able Engineering, Ltd., 6, Singer St. Chambers, E.C.2. Clerkenwell 3695. [7795

SITUATIONS VACANT

COMPUTERS.

WE are establishing new approaches to the problems of digital computer design. This requires.
ENGINEERS experienced in digital techniques who are prepared to break through the present barrier of knowledge and produce systems of a radical and advanced nature.
VACANCIES exist at all levels and are located in the London area. Applicants should submit a summary of their experience and qualifications to:—
THE Personnel Manager (Ref. 85),
DE Havilland Propellers, Ltd., Conquest House, 37-39, John St., Theobalds Rd., London, W.C.1. [7835

AUTOMATION.

A TEAM is being recruited to study the application of computers to an industrial problem. The qualifications for this post include an analytical approach, with the ability to comprehend complex situations, and produce reasoned answers, together with some experience in one or more of the following:—
1. BUSINESS methods, preferably in an organisation and methods or operational research team.
2. MATHEMATICAL or logical analysis, ideally concerning computers.
3. SYSTEMS analysis of guided weapons or large industrial plant.
4. RESEARCH or development work on digital computers.
AN enquiring mind capable of precise and exact assimilation of details is of more importance than technical or academic qualifications.
THE post to be filled include that of team leader. The team will be located initially near Manchester but there will be some posts in the London area.
PLEASE apply to The Personnel Manager (Ref. 91),
DE Havilland Propellers, Ltd., Conquest House, 37-39, John St., Theobalds Rd., London, W.C.1. [7836

ESSEX Education Committee.

SOUTH-East Essex Technical College LONGBRIDGE Road, Dagenham.
REQUIRED in September:
ASSISTANT Grade "B" to teach mainly Radio and Television Servicing and Electrical Technicians (Electronics) Courses. Teaching and servicing experience is desirable.
SALARY: £650×£25 to £1,025 plus additions for degree or equivalent, approved training and London Allowance. Increment within scale for previous teaching service, approved industrial experience and War/National Service.
DETAILS and application forms (stamped addressed foolscap envelope) from the Clerk to the Governors at the College. [7822

TELE-COMMUNICATIONS PRINCIPLES

45/- Postage 1/9.

(IN M.K.S. UNITS), by R. N. Renton.

HANDBOOK OF LINE COMMUNICATION. The Royal Signals. Vol. I. 30/-. Postage 1/6.
THE RADIO AMATEUR'S HANDBOOK, 1958 ed. 32/6. Postage 1/9.
TV AND RADIO TUBE TROUBLES by S. Heller. 23/-. Postage 9d.
HIGH FIDELITY SOUND REPRODUCTION by E. Molloy. 20/-. Postage 9d.
FOUNDATIONS OF WIRELESS by M. G. Scroggie. 15/-. Postage 1/-.
TRANSISTOR CIRCUITS by R. P. Turner. 22/-. Postage 9d.
PROBLEMS IN RADIO ENGINEERING by E. T. A. Rapson. 15/-. Postage 6d.
SECOND THOUGHTS ON RADIO THEORY by "Cathode Ray." 25/-. Postage 1/-.
RADIO VALVE DATA. Compiled by "W.W." 5/-. Postage 8d.

THE MODERN BOOK CO.
19-23, PRAED STREET, LONDON, W.2
BRITAIN'S LARGEST STOCKISTS OF BRITISH AND AMERICAN TECHNICAL BOOKS
Complete Catalogue 6d.
PADdington 4185. Open 6 days 9-6 p.m.

IF THE QUALITY OF YOUR TAPE RECORDINGS IS OF IMPORTANCE TO YOU USE ONE OF OUR THREE MIXER UNITS
Built-in Power Supply, 3 Inputs, Special Safety Fusing System. They can be supplied to work with any Tape Recorder.
Details from:
SOUND NEWS PRODUCTIONS
10 CLIFFORD STREET
NEW BOND STREET, LONDON, W.1

THE IDEAL ANSWER

to the F.M. receiver oscillator stability problem is quartz crystal control

Q.C.C. have recently introduced a range of overtone oscillator crystals which bring this ideal solution into the price range of the average Hi-Fi enthusiast.

Operating in the 30 Mc/s range, and used with a 12AT7 oscillator multiplier valve, they can be used to feed any normal mixer in 10.7 Mc/s F.M. receivers.

The price for three crystals covering the Home, Light and Third programmes of any B.B.C. V.H.F. transmitter is **£7/10/-,** post free. They are available, ex stock, direct from us, or through your usual Hi-Fi stockist.

If you are interested, why not send 6d. in stamps for our leaflet FMO, which gives full circuit details for two different F.M. receivers, one of which can be remotely switched.

The QUARTZ CRYSTAL Co. Ltd.
Q.C.C. Works, Wellington Crescent, New Malden, Surrey.
Telephones: MALden 0334 & 2866

TELEPHONE SETS

Ex-Govt. "DON Mk. V" type



Ideal between 2 or more positions up to five miles. STORE, FACTORY AND OFFICE; FARM BUILDINGS; GARDEN SHED and HOUSE. 2 sets in individual carrying cases, complete with **long life batteries, bells, ringer and 100' telephone cable.**

£5.11.0 per pair. Carr. (G.B.) 9/6.

SPECIAL OFFER

AERIAL MASTS

R.A.F. TYPE 50

36ft. HIGH

Kits comprise—9 2in. dia. Tubular Steel (Copper Plated) Sections of 4ft. length, top-section and base, Pickets, Guys and Fittings.

YOU can purchase this normally expensive **MAST** for a fraction of its cost, i.e.,

£8.10.0 ONLY
(Carr. 15/6)

Please add £1 for (returnable) wooden carrying case.

The MAST is particularly suitable to take aerials for Tx., Rx., F.M. and T.V. (especially COMMERCIAL), and has many other uses. Extra 4ft. sections can be supplied at **11/6** per section.

U.S.A. 45ft. AERIAL MAST (10 sections 4ft. 6in. x 2in., guys etc.). This entirely new and complete set in canvas carrying bag **£15/10/-** each, carr. 17/6 or 2 sets with additional low and high frequency antenna £30 pair. Carr. extra.

ARMY TYPE 32FT. MASTS similar to above but 10 lin. screw-sections, suitable for permanent lightweight installation. Kit in canvas bag, **£5/10/-**, carriage 12/6.

BURGESS

(Mk. 4 BR METAL BODY UNIVERSAL)
CONTACT A.M. Ref. 5C/4098

MICRO SWITCHES

BRAND NEW MINISTRY RELEASE

78/- PER DOZ. **£25** PER 100
(min. quantity)

Compare this remarkable almost half-price offer with manufacturers' prices.

SPECIAL QUOTATIONS FOR LARGER QUANTITIES

D3 STRANDED TELEPHONE CABLE, NEW 1 mile drum, 85/-, carr. 17/6.

TELEPRINTER EQUIPMENT—Brand New

Creed Automatic Transmitter 6S. Rect. Units 24B. 1-P 110/230 v. O-P, 80 + 80 v. Telegraph Relays 299 AN. Creed Keyboard 7M. 3 Bank 5 Unit with answer-back unit.

Quantity and Export enquiries invited for above items, also other Electronic Component parts.

HATTER & DAVIS (RELAYS) LTD.
136, KENSAL ROAD, LONDON, W.10.
LADbroke 0666

SITUATIONS VACANT

INSTALLATION ENGINEERS.

ARE required by Marconi's Wireless Telegraph Co., Ltd., Chelmsford, to undertake the installation and commissioning of T.V. transmitters and studio equipment, H.F. transmitters, receivers and associated equipment. The majority of the appointments are overseas and offer attractive prospects to suitable applicants. Applications can also be considered from young engineers possessing academic qualifications but who have not yet obtained the necessary experience for this type of work as suitable familiarisation training will be given. Write in confidence, giving full details and quoting reference WW 2104B, to Mr. J. L. Scott, Department C.P.S. Marconi House, 336-7, Strand, London, W.C.2. [7834

SURREY EDUCATION COMMITTEE

KINGSTON Technical College,
FASSETT Rd., Kingston-upon-Thames.
REQUIRED for 1st September, 1958, Lecturer in electrical engineering in the engineering department. Candidates must be graduates or hold equivalent professional qualifications. Appropriate experience in industry and in teaching is required and research experience will be a recommendation. Salary scale £1,200 ×£30 to £1,350 p.a. London Allowance payable.
FURTHER particulars and application form on receipt of stamped addressed envelope from the Principal to be returned as soon as possible. [7864

THE Polytechnic, 309, Regent St., W.1.

ELECTRICAL Engineering Department.

APPLICATIONS are invited for a post of Assistant Lecturer (Grade B) in Electrical Engineering to take up duties on 1st September, 1958.
CANDIDATES should possess a University Degree in Engineering or equivalent qualification and have had suitable industrial experience. Ability to teach Telecommunications and/or Electronics up to the standard of the final B.Sc. (Eng.) and Diploma in Technology examinations will be an advantage.
SALARY in accordance with the Burnham (Further Education) Scale for Grade B Assistant Lecturer, which rises to a maximum of £1,025 per annum, plus allowances for graduate status (£75), training (£25–£75), and London (£36–£48).
THE commencing salary will depend upon qualifications and experience and may include up to twelve increments in respect of approved service in industry. The posts are subject to superannuation and some concession in this respect may be made for previous industrial employment.
FURTHER particulars and application form, to be returned no later than 2nd May, 1958, may be obtained by sending a stamped addressed foolscap envelope to the undersigned.
J. E. RICHARDSON, Director of Education. [7820

ASSISTANT Engineer grade II required by EAST Africa High Commission Directorate of Civil Aviation on probation for pensionable employment; gross salary according to age and qualifications up to £1,173 a year in scale £813 rising to £1,341 a year; outfit allowance £30; free passages, liberal leave on full salary after each tour 30-36 months, candidates, who should hold at least two second year and preferably one third year C. & G. certs. in Telecomms. principles or radio, must have had at least three years experience in erection and maintenance of ground station transmitters, radio and radar navigational aids and aerial systems; up to date knowledge of workshop practice and teleprinter and perforator equipment essential; experience of diesel electric power plant maintenance an advantage; write to the Crown Agents, 4, Millbank, London, S.W.1; state age, name in block letters, full qualifications and experience and quote M2C/42260/WF. [7817

ASSISTANT Controller of posts and telegraphs Sarawak.
FOR the installation and maintenance of all types of telecommunications equipment and systems including land, lines, cables, telephones, teleprinters, carrier V.F.T. radio (including V.H.F.) etc., the administration of telecommunications and postal services.
PENSIONABLE appointment in the salary range £1,386 to £2,324 p.a. plus education and children's allowances; free passages for officer, wife and three children under eighteen; free quarters if available; generous leave; no personal income tax.
CANDIDATES between 21 and 40 years should be Graduate Members of the Institution of Electrical Engineers or possess a degree or diploma recognised by the Institution as granting exemption from its examinations; practical experience in telecommunications is necessary.
WRITE Director of Recruitment, Colonial Office, S.W.1, stating age, qualifications and experience; quote BCD. 108/24/01. [7810

SENIOR Electronics Engineers with experience and technical ability.—Apply the Research & Development Organisation of A.G.I., Ltd., 105, Lansdowne Road, Croydon. [7823

PERSONAL assistant required by owner of London retail radio and electrical business of good standing; congenial position and good prospects for capable, conscientious person; state age and details of career.—Box 5799. [7850

for use with KT 88 with variations

The following circuits were described by W. Ian Heath, B.Sc. (Eng.), and G. R. Woodville in the April 1957 issue of "Wireless World."

Using four KT 88's with Cathode Bias 100 watts.

OUTPUT TRANSFORMER TYPE 4N29

3,000 ohms centre tapped and tapped at 43% and 25% Secondary impedances: 1.7 ohms, 6.8 ohms, 15.4 ohms, 27 ohms, 42.5 ohms, 61 ohms, 84 ohms and 110 ohms. Primary inductance: 50 hys. Primary D.C. resistance: 35 ohms + 35 ohms. Leakage reactance: Primary to secondary 6 m/hys. Half primary to secondary 3 m/hys. Half primary to half primary 7 m/hys. Power handling capacity: full 100 watts at 30 c/s. A grain oriented C core has been employed resulting in an instrument light enough for the 22 lb. parcel post limit. Size: 4¾in. x 4¼in. x 6¼in. high. Weight: 12¼ lbs. Potted 4N29C. Size: 6in. x 5¼in. x 6¼in. high. Weight 14½ lbs.

●

Using two KT 88's in Push Pull with Fixed Bias, 100 watts output.

OUTPUT TRANSFORMER TYPE 4M99

4,500 ohms centre tapped and tapped at 43% and 25%.
Secondary impedances: Four sections each 25 v.
Primary inductance: 45 hys.
Primary D.C. resistance: 30 ohms + 30 ohms.
Leakage reactance: Primary to secondary 4.5 m/hys. Half Primary to secondary 2.3 m/hys.
Power handling capacity: 100 watts at 25 c/s.
Size: 6¾in. x 4¼in. x 6¼in. high. Weight: 21 lbs.
Potted 4M99C. Size: 7¾in. x 5¼in. x 7¼in. high. Weight: 22lbs.

Mains transformers and chokes for the above are available.

MASSICORE SAVAGE

SAVAGE TRANSFORMERS LIMITED

NURSTEED ROAD, DEVIZES, WILTSHIRE, ENGLAND.
Telephone: Devizes 932-3

SELENIUM RECTIFIERS

40 ma. to 10 amp., 6 v. to 100 v. Bridge, H. Wave or P.P.

WITH OR WITHOUT HIGH-GRADE TRANSFORMER TO SUIT. These are new goods, best makes, not reconstructed Government surplus. Popular types, 6 v. 1 a., 4/-, 2 a., 7/6, 12 v. 2 a., 8/6, 12 v. 1 a., 7/6, 12 v. 3 a., 15/-, 6 a. alloy-finned type, 27/6, 24 v. 0.3 a., 9/-, 0.6 a., 12/6, 24 v. 1 a., 13/6, 2 a., 15/6, 24 v. 3 a., 21/-, 50 v. 1 a., 24/-, 50 v. 2 a., 42/-, 130 v. 300 ma. h. wave, 38/-, 250 v. 300 ma. do., 65/-, 110 v. 1 a. bdge., 48/-, 130 v. 80 ma. bdge., 21/-. Postage 9d. extra each.

CHARGER KITS

No. 1, a kit for 2 v., 6 v., 12 v., 3 amp. transformer, rectifier, ammeter, all high-grade new parts, not rubbish, 52/6, unique convector housing for same, as illust., 12/6, p.p. 3/-, di.to, but 2 amp., 43/-, case 12/6, p.p. 3/-.

Economy 12 v. 3 amp. kit, no ammeter needed, 34/6, p.p. 2/6, all with 12 months' guarantee.

CHAMPION PRODUCTS
43 UPLANDS WAY, LONDON, N.21
Telephone LAB 4457

ELECTRICAL MEASURING INSTRUMENTS REPAIRED

1. *Considerable reductions in your overheads!*
2. *Prompt Quotations and Service!*
3. *Urgent orders given priority attention!*
4. *Guarantee of satisfaction!*

We specialise in the repair of all types and makes of Voltmeters, Ammeters, Microammeters Multirange Test Meters, Electrical Thermometers, etc.

As contractors to the Ministry of Supply, General Post Office and other Government Departments, we are the leading Electrical Instrument Repairers in the Industry. No enquiry is too big or too small. For prompt estimate and speedy delivery send defective instrument by registered post, or write to Dept WW

L. GLASER & CO., LTD.,
96-100, Aldersgate St., London E.C.1. Tel. MON 9822.

ENGINEERS!

Whatever your age or experience, you must read "ENGINEERING OPPORTUNITIES." Full details of the easiest way to pass A.M.I.Mech.E., A.M.I.C.E., C. & G. (Electrical, etc.), General Cert., etc., on

144 PAGES

Free!

"NO PASS—NO FEE" terms and details of Courses in all branches of Engineering—Mechanical, Electrical, Civil, Auto, Aero, Radio, etc., Building etc. If you're earning less than £15 a week, tell us what interests you and write for your copy of "ENGINEERING OPPORTUNITIES" today—FREE

B.I.E.T.
387 College House, 29-31, Wright's Lane, London, W.8.
BRITISH INSTITUTE OF ENGINEERING TECHNOLOGY

SITUATIONS VACANT

FOREMAN required for expanding firm of electronic instrument manufacturers, north-west London area, good salary and prospects.—Write Box 5504 [7828

TECHNICAL assistant required with knowledge of electronic and magnetic amplifiers for electric motor control, attractive salary, superannuation scheme.—Box 5807. [7855

ASSOCIATED TELEVISION LIMITED have vacancies for trainee engineers to assist in the operation and maintenance of television studio and telecine equipment.
APPLICANTS should have a sound knowledge of basic radio and television theory.
APPLY in writing to Senior Studio Engineer, Associated Television Limited, Television House, Kingsway, London, W.C.2. [7829

TELEVISION bench and field engineers required at all times for vacancies in most parts of the British Isles; permanent positions with highest salaries, plus bonus for suitable applicants; 5½-day week.—Box 2781. [0251

TELEVISION service engineer, good position and prospects for keen man old-established N.W. London Murphy dealer, driving experience essential; state age and details of experience.—Box 5800. [7851

ASSISTANT magnet technologist required for new research laboratories in West of England; aged 20-30 years, preferably qualified with some experience of permanent magnet materials; excellent prospect for suitable candidate.—Box 5805. [7852

PRODUCTION Manager required for a manufacturing unit for small precision electro-mechanical devices; some experience of torque motor and relay production would be an advantage, and of high precision fitting essential Apply in writing in the first instance to:—SALES Manager, Woden Transformer Co., Ltd., Moxley Road, Bilston. [7839

ELECTRONICS Engineer; an Electronics Engineer with O.N.C. or equivalent is required for a post in an expanding computer group which is developing novel types of digital computers.—Applications should be addressed to A. V. Roe & Co., Ltd., Hanworth Lane, Chertsey, Surrey. [7821

ELECTRONICS service engineer required to deal with Hammond Organ installations and servicing; the applicant should have a knowledge of electronic organs, be able to drive and understand music. Apply Boosey & Hawkes Engineers, Ltd., Deansbrook Rd., Edgware, Middx. Tel. Edg. 5581. [7833

RADIO and Television manufacturers with important Government contracts require an experienced Engineer as Chief of Test, permanent position, pension scheme; apply, giving full details of past experience to—Mr. M. Jones, Masteradio, Ltd., Vibrant Works, Tre-forest, Glam. [7858

ELECTRONIC Engineers are required for an extensive development programme on Radar Navigational aids; applicants should have experience in this field and preferably also in working with the Ministry of Supply; Senior Engineers are needed to act as project leaders whilst juniors are also required for detail design work.
THE laboratories are situated in a new town giving easy access to London and the countryside; the nearby Hatfield Technical College offers excellent facilities for study; amenities include pension scheme and a wide range of sports club activities. Applications giving full details of experience, qualifications and age will all be seen by the Chief Engineer, Electronics Division, but should be addressed initially to the Personnel Manager (E.48), Murphy Radio Limited, Welwyn Garden City. [7785

MALTA. Murphy radio distributor in Malta offers attractive terms to radio and T/V service engineer; interviews will be held in Welwyn Garden City and applications giving full details of age, experience and qualifications should be forwarded for consideration to Personnel Department, Murphy Radio Ltd., Welwyn Garden City, Herts. [7865

PROJECT Leader of small team to develop a high precision frequency standard based on Ammonia Maser. First or second class honours physics with at least five years experience in microwave and electronic eng., to control project up to and including production; well established company, pension scheme, etc; from £1,200.—G. D. Ltd., Sudbourne Rd., S.W.2. [7819

ELECTRONICS: Electronic Instruments, Ltd., of Lower Mortlake Rd., Richmond, have vacancies for junior and semi-senior engineers for instrument final testing. These are staff positions offering interesting and varied jobs with a bright future in this rapidly expanding Company. 5-day week, pension scheme. —Apply to the Company, giving qualifications and quoting reference TE/WW/M. [0126

RADIO Technicians required by International Aeradio Ltd. for overseas service. Permanent and pensionable posts. Normally tax-free, inclusive salary in local currency varying with location, and additional marriage and child differentials. U.K. leave, free air passages and insurance. Kit allowance. Qualified candidates to whom replies will be sent write to Personnel Officer, 40 Park St., W.1. [0262

LONDON CENTRAL RADIO STORES

ELLIOTT PEN RECORDERS—

Decibel Meter 0-1mA. Suitable for measuring sound atmospherics, etc. Price on request.
DASHBOARD 8-DAY CLOCKS. Panel mounting, size 2¼in. By well-known makers. **£2/17/6.**
VENNER 8-DAY CLOCKWORK TIME SWITCHES. 230 volts, 1 amp., 3½ × 2¾ × 2¼in., with key and connecting socket. **27/6.**
Ex-G.P.O. RELAYS. New **6/-.**
HIGH-SPEED ELECTRO-MAGNETIC COUNTERS. Ex-Govt. 0-9,999, 25/50 v. D.C. Size 4 × 1 × 1in. Single coil, 2,300Ω. **18/6.**
METAL RECTIFIERS. Ex-Govt., made by S.T.C., 250 v. 60 mA. Size 5¼in. × 1in. dia. Unused. **7/6.**
WIREWOUND RESISTANCES. 160Ω 1 A. Overall size 10 × 1in. dia. Unused. **5/6.**
ELECTRO MAGNETIC COUNTERS. Ex-G.P.O., every one perfect, 400 and 500 ohm coil, counting to 9,999, operated from 25 v.-50 v. D.C., 4¼in. long × 1¼ × 1in., many industrial and domestic applications. **5/6.**
0-1 MOVING COIL MILLIAMMETER. Overall dia. 3¼in. dial, 2¼in. flush panel mounting. Guaranteed in perfect working order. **19/6.**
DECIBEL METER. Moving coil, reading —30 to zero (0db = .775 v. (R.M.S.), overall dia. 4¼in., dial 3in. **£2.15/-.**
MOVING COIL HAND MIKE. Type No. 7. **7/6.**
VIBRATORS. Synchronous 6 v. 7-pin and 2 v. 7-pin. **5/6** each.
UNISELECTOR SWITCHES. Have many applications including automatic tuning, circuit selection, etc. Operation on 24-50 v. Half wipe 6-bank. **12/6.**
VOLUME CONTROLS with switch. 10K, 2 pole, 1in. spindle. **2/6.**
VOLTAGE DROPPING RESISTANCE. 60 watts A.C./D.C., 5 valves, 13 volts, 03 amps, tapped at 100-110 volts, 200-210 volts, 220-230 volts, 240-250 volts. Size 4in. high × 1in. diameter. **5/6.**
MILLIAMMETERS. 2in. dial. Reading 30-0-30, flush mounting. Ex-Govt. Not checked for accuracy. **6/-.**
L.R. HEADPHONES. Lightweight. **7/6.**
TUFNOL SHEETS. ⅛in. thick, 47⅛in. × 47⅛in. **£2.** 23in. × 16in. **7/6,** 16in. × 16in. **5/-** per sheet.

All prices include carriage.

23 LISLE ST. (GER. 2969) LONDON, W.C.2
Closed Thursday 1 p.m. Open all day Saturday

CABINETS

for
Goodmans, G.E.C., Wharfedale, Jensen

STANDARD BASS REFLEX CABINETS
Walnut, Mahogany and Oak, as illustrated
(34" high)
12" Speaker Model **£10.0.0**
10" Speaker Model **£9.10.0**
8" Speaker Model **£9.0.0**
Open till 5.30 Saturdays.

A. DAVIES & CO. (Cabinet Makers)
3 Parkhill Place, off Parkhill Road, London N.W.3. GULLIVER 5775

TELETRON SUPER INDUCTOR COILS



Ferrite Rod Aer.als. Wound on high permeability Ferroxcube rod, Medium wave **8/9,** Dual wave **12/9**



Type HAX. Selective crystal diode coil for tape and quality amplifiers, MW 3/-, LW 3/6. Dual wave TRF coils, matched pairs (as illustrated) 7/- pair. Type S.S.O. Supersonic Tape Osc. coil, provides 6.3 v. 3 a. RF for pre-amp heater. Eliminates induced 50 c/s hum, 40/100 kc, 15/- ea. Transistor coils, etc. Available from leading stockists. Stamp for complete data and circuits.

THE TELETRON CO. LTD.,
266, Nightingale Rd., London, N.9. How 2537

UNIQUE OFFER . . .

6V. CAR RADIO

PRICE

£6.19.6

EACH

(P. & P. 7/6)

This magnificent 6-valve medium waveband ex-W.D. Staff Car Radio, complete with built-in 6in. speaker and vibrator pack, with aerial and earthing leads.
Housed in strong metal case measuring approx. 8in. × 7in. × 9in. Made by famous Car Radio Manufacturers. Tested and ready for immediate use.

WALKIE-TALKIE No. 38 MK. II

RIGHT IN PRICE AND SIZE—9×6×3½in.

Ideal for search parties fire brigades, civil defence, building contractors, etc. Range approximately 5 miles, 7.4-9 Mc/s. Brand new condition. Complete with 5 valves, headphones, throat mic. junction box, aerials, harness signal satchel, spare set of valves and instruction card with illustrations. Operated from dry batteries, H.T. 120/150 v., and L.T 3 v. (not supplied). In brand new condition, our price **£2/17/6** each. p. & p. 7/6.

RECEIVER-TRANSMITTER No. 18 Mk III

6-9 Mcs, Rec. can be detached from Trans. Unit, built-in micro-amp-meter, complete with headphone and mic., aerial etc. In excellent condition. Our price **75/-**, p. & p. 7/6.

MIDGET ROTARY TRANSFORMER

SIZE
Inp. 11.5 v. Outp. 365/310 v. at 30 mA. Brand new and Trop. packed, **17/6** ea., p. & p. 1/6.

EX G.P.O. ELECTRO MAGNETIC COUNTERS, 5×1½×1¼in. 4 figures, various voltages D.C. 3/6 v. 18/24 v. 100/110 v. 200/230 v., **7/6** each, p. & p. 1/6.

INTERCOMMUNICATION HAND SETS, self-energised, similar to G.P.O. type, no electricity or batteries required, connect with 2-way bell wire, clear range of several hundred yards. Brand new, **32/6** per pair, p. & p. 2/-.

HIGH SPEED RELAY, 2 bobbins 1,000 ohms each. **5/6**, p. & p. 1/-.

U.S. HIGH SPEED RELAY, 300 ohms coil 2.05 v. adjustable contacts. **5/-**, p. & p. 1/3.

HEADPHONES M/C, complete, **9/6** per set, p. & p. 1/6.

EX U.S. AERIAL, 9ft. spring loaded and fully collapsible, complete with cords and guys, ideal as aerial or fishing rod, brand new, **10/6**, p. & p. 2/-.

AERIALS, 3 four foot "F" rods, bottom, centre and top (tapering) push-in-type sections. **10/6** per set, p. & p. 2/3. Matching aerial base **3/6**, p. & p. 1/6.

BROADCASTER

for talking, singing or announcing over your own radio, simply connect to your Radio pick-up . . . 2 Broadcasters will make a 2 station intercom. house phone. No electricity or battery required, just connect with 2-way wire. **12/6** ea., p. & p. 2/-.

M/C METER. 0-15 and 0-600 v. D.C. 2in. flush mounting ex. equipment. **8/6**, p. & p. 1/3.

METER. 2½in., 0-1 amp., projecting type thermo-couple, new and boxed. **6/6**, p. & p. 1/3.

U.S. MIDGET MOTORS. 2×1¼in. Will operate from 6 v. to 24 v. D.C. **12/6** each, p. & p. 1/6.

DITTO. Will operate from 9 v. to 28 v. D.C., **12/6** each, p. & p. 1/6.

Special prices for bulk quantities.
Stockists of W/S No. 19 and spares.
TERMS C.W.O.

We specialise in Telephone and E.A. Equipment and spares as used by Govt. Depts. and the Services. Trade and manufacturers enquiries invited.

Postage and Carriage quoted, British Isles only.

FINSBURY TRADING CO.
12 STOKE NEWINGTON HIGH ST., LONDON, N.16. *Tel.: CLissold 7342*

SITUATIONS VACANT

ELECTRONICS Technician. The London Hospital, Whitechapel, E.1, has vacancy for a technician for constructing and servicing a wide variety of electronic equipment, including counting and scaling equipment, used for radioactive isotope assay. Some knowledge of instrument making also desirable. Salary according to qualifications and experience, but probably in the range £650-£880 p.a. Write to House Governor. [7831

COMPONENT Engineers and Technical Assts. reqd. for development of capacitors, transformers and other telecommunications components; candidates should have appropriate practical experience, H.N.C. standard desirable; interesting and important work using new techniques; progressive salaries, group pension and life assurance schemes.—Write with full details to Staff Officer, Ref. 744/7, Siemens Edison Swan, Ltd., Woolwich, London, S.E.18. [7866

ELECTRONICS Technician for Physics Dept. Duties consist of construction and development of new equipment, maintenance of apparatus for radioisotope and radiation measurements. The successful applicant will take part in an interesting and rapidly expanding field of scientific work. Salary scale £475-£600 plus London Allowance. Detailed applications to Secretary, Hammersmith Hospital & Postgraduate Medical School, Du Cane Rd., London, W.12, within 10 days. [7840

TECHNICAL Sales Representative. Leading firm of electrical component manufacturers situated in N.W. London require Technical Sales Representative with first-class knowledge of radio, television and electronic industries to cover mainly Southern England territory. Superannuation scheme available for men up to 50 years of age and a car will be provided. Salary up to £1,000 p.a. Write stating age and experience in chronological sequence to Box 3M. P891, A.K. Advg., 212a, Shaftesbury Ave., London, W.C.2. [7830

BELLING & LEE, Ltd., wish to appoint two technical sales representatives age 28/35, to call on manufacturers, research laboratories, in areas comprising Scotland and N. Ireland and the Eastern counties; they should preferably have a degree or technical equivalent, be based in these areas and own a car; remuneration will be by salary and commission and reasonable expenses will be paid; applications stating age, qualifications, experience and giving some indication of remuneration expected, to the Secretary, Great Cambridge Rd., Enfield, Middlesex. [7811

BELLING & LEE, Limited, wish to appoint an experienced technical sales representative age 30/35, to call on the wholesale and retail trade in Birmingham and the Midland Counties. Applicants should have H.N.C. or City and Guilds in Electrical Engineering with radio and telecommunications, or similar qualifications. Must own car for which allowance will be made. Remuneration will be by salary and commission and reasonable expenses will be paid. Applications stating age, qualifications, experience and giving some indication of remuneration expected, to the Secretary, Great Cambridge Road, Enfield, Middlesex. [7846

MINISTRY of Transport and Civil Aviation requires Electrical Engineers (Assistant Signals Officers) for aviation telecommunications and electronic navigational aids. Min. age 23, 1st or 2nd Class degree in Physics or Engineering, or A.M.I.E.E. or A.F.R.Ae.S. (candidates with Parts I, II and III of A.M.I.E.E. or Parts I and II of A.F.R.Ae.S. or equivalent, or of very high professional attainment without these qualifications considered). Salary £665 (age 23) to £1,085 (age 34). Max. £1,250. Slightly lower outside London and for women. 5-day week.—Further details and forms from M.L.N.S., Technical and Scientific Register (K), 26, King St., London, S.W.1, quoting D129/8A. [7824

ASSISTANTS (Scientific); pensionable posts for men and women, age at least 17½ and under 26 (unless specially experienced) on 1.1.58; extension for forces or overseas civil service; appropriate educational or technical qualifications and at least two years relevant experience in one of the groups: (i) Engineering and physical sciences: (ii) Chemistry, biochemistry and metallurgy; (iii) Biological sciences; (iv) General (including geology, meteorology, and highly skilled in laboratory crafts such as glass-blowing); starting pay from £340 up to £530; men's maximum (London) £690; opportunities for promotion and for further education; 5-day week, generally; write Civil Service Commission, 30, Old Burlington St., London, W.1, for application form quoting No. S 59/58. [7809

T.V. Marconi's Wireless Telegraph Company Ltd., Chelmsford require experienced engineers to undertake the installation and commissioning of television transmitters and associated equipment; the majority of the assignments are overseas and offer attractive prospects to suitable applicants; applications can also be considered from young engineers possessing academic qualifications but who have not yet obtained the necessary experience of this type of work as suitable familiarization training can be given; the appointments are permanent and pensionable with good starting salaries and generous overseas allowances; write in confidence, giving full details and quoting reference WW 2104A to Mr. J. L. Scott, Department C.P.S., Marconi House, 336/7, Strand, London, W.C.2. [7806

Cabinets & Equipment
by STAMFORD



ENCLOSURES TO house the New Axioms 300 and 400 Midax 650 and 400 and Trebax to Goodmans specification. (These units now available from stock).
The Dunster Enclosure **£16/15/-** or **£2/7/-** dep. and 9 payments of **£1/14/1**.



G.P. 42.
32in. high, 17in. wide, deck area 16 × 14in. deep. **£14/17/-** or **£2/1/-** deposit and 9 payments of **£1/9/2**.

G.P. 42 with fold back doors.

These cabinets are supplied in Oak, Walnut or Mahogany veneers, finished to shade required. Delivery 12/6 in England and Wales; Scotland and N. Ireland 25/-.
Write for catalogues of equipment and cabinets for equipment, speakers, records, Pye Black Box, and Goodmans Axiom enclosures. Satisfaction guaranteed or money refunded.

Visit our Showroom

Showroom & Works:
84, 86 & 98 WEYMOUTH TERRACE, HACKNEY RD., LONDON, E.2. *SHO 5003*
Demonstrating, supplying and fitting—**Acoustical Quad II, Leak, Rogers, Armstrong, Garrard, Lenco, Collaro, Connoisseur, Sonomag, Adaptatape, Magnafon, etc.**
Playing through—**The New Goodmans range, Wharfedale, Duode, T.S.L. Lorenze, G.E.C. Stentorian, etc.**
OPEN ALL DAY SATURDAY—LATE NIGHT WEDNESDAY. No. 6 bus Liverpool street to Odeon, Hackney Road, walk back two turnings.

Correspondence only, to:-

A. L. STAMFORD (Dept. A4)
20 College Parade Salusbury Road, London, N.W.6

HANNEY

offers

Components for

OSRAM 912 PLUS AMPLIFIER
OSRAM 912 PASSIVE UNIT
OSRAM 912 PRE-AMPLIFIER
OSRAM F.M. PLUS TUNER
MULLARD "TAPE" AMPLIFIERS
MULLARD 510 AMPLIFIER

STOP PRESS

COSSOR
3 VALVE, 3 WATT
AMPLIFIER KIT
£9-15-0
AS ADVERTISED

Manuals Available:
912 PLUS AMPLIFIER—4/-; OSRAM F.M. PLUS TUNER—2/6; MULLARD HIGH QUALITY AMPLIFIER MANUAL (contains F.M. details)—3/6; DENCO F.M. TUNER—1/6.

Send 3d. postage, stating lists required. General Components list also available.

L. F. HANNEY
77, Lower Bristol Road
Bath

PRECISION SHEET METALWORK

We specialise in manufacturing of Chassis in all metals, large or small quantities to your own specifications

V. W. BEAMISH

Shardeloes Garage, Shardloes Rd., New Cross London, S.E.14

Telephone: TIDeway 4795

59 GNS.—"17"



A full specification 17" Television Receiver to Spencer - West standards now available at your Dealers.

Remarkable performance and priced at 59 Gns. only complete.

For leaflet apply to :

SPENCER - WEST LTD.
GT. YARMOUTH, NORFOLK

SITUATIONS VACANT

ELECTRONICS IN MEDICAL RESEARCH—Applications are invited for appointment of a junior technician in the Instrument Service Laboratory at the National Institute for Medical Research. This laboratory is responsible for the maintenance and repair of instruments used throughout the Institute and some prototype production. An excellent opportunity will be provided for a young man who wishes to obtain general experience of electronic instrumentation. Applicants should possess G.E.C. with 'O' level passes in four subjects including Maths. Physics and English and should not be more than 24 years of age. Salary on a scale with half yearly increments from £250 at age of 18, three weeks annual holiday. Application form obtainable from Personnel Officer, National Institute for Medical Research, The Ridgway, Mill Hill, N.W.7. [7841

SENIOR Scientific and Scientific Officers, Experimental and Asst. Experimental Officers required at Government Communications H.Q., Cheltenham, for telecommunications and electronic research in following fields: V.H.F. receiver design and microwave techniques; propagation trials; applications of semi-conducting devices; high speed electronic switching; data storage and handling; computer programming, and operational research. Candidates must normally be natural born British subjects of natural born British parents. For SSO/SO 1st or 2nd class hons. degree in physics, mathematics or engineering or equiv., at least 3 years' post-graduate experience for SSO. For EO/AEO Pass Degree, H.N.C. or near equiv. Salaries for men (provincial rates) S.S.O. £1,130-£1,330; S.O. £595-£1,050 (according to age and quals.) E.O. £920-£1,130; A.E.O. £370-£800 (according to age). Appointments unestablished but opportunities to compete for established posts. Forms from M.L.N.S., Technical and Scientific Register (K), 26, King St., London, S.W.1, quoting A147/8A. [7863

SITUATIONS WANTED

TELECOMMUNICATIONS Engineer (29), 10 years exceptionally wide experience, seeks progressive position overseas; full details on application.—Box 5652. [7837

RADIO Technician, 29, married, 10 yrs, installation, repair H/F, V.H.F. TX/RX F.S.K. U/F and Mult. Channel Carrier Fred Links. Seeks employment U.K. or overseas.—Box No. 5368. [7815

COMPANY Director, A.M.I.P.R.E., A.M.Inst.-B.E., age 32, 15 years' experience electrical and radio engineering, offers part-time professional services to large company of electrical engineers and contractors, Midlands area.—Write Box 5929. [7869

ISRAELI Engineer aged 54, thirty years experience electronics, theory, practice, teaching, good maths background, now teaching Israeli Technical College, desires work July August with British firm either teaching or practice with view permanent position if acceptable.—Box 5653. [7838

TECHNICAL TRAINING

LEARN it as you do it—we provide practical equipment combined with instruction in radio, television, electricity, mechanics, chemistry, photography, etc.—Write for full details to E.M.I. Institutes, Dept. WW47, London, W.4. [0006

CITY and Guilds (Electrical, etc.) on "No Pass—No Fee" terms; over 95% successes, for full details of modern courses in all branches of electrical technology send for our 144-page handbook, free and post free.—B.I.E.T. (Dept. 388A) 29, Wright's Lane, London, W.8. [0017

TUITION

FULL-TIME courses for P.M.G. Certificates, C.G.L.I. Telecommunications and Radar Maintenance Certificates.—Information from College of Technology, Hull. [0111

WIRELESS.—See the world as a radio officer in the Merchant Navy; short training period; low fees, scholarships, etc., available; boarding and day students; stamp for prospectus.—Wireless College, Colwyn Bay. [0018

T/V and Radio.—A.M.Brit.I.R.E., City and Guilds, R.T.E.B. Cert., etc., on "No Pass—No Fee" terms; over 95% successes; details of exams and home training courses in all branches of radio and T/V, write for 144-page handbook—free.—B.I.E.T. (Dept. 397A), 29, Wright's Lane, London, W.8. [0116

A.M.I.Mech.E., A.M.Brit.I.R.E., City and Guilds, etc., on "No Pass—No Fee" terms, over 95% successes—or details of Exams and courses in all branches of Engineering, Building, etc., write for 144-page Handbook—Free: B.I.E.T. (Dept. 387B), 29, Wright's Lane, London, W.8. [0118

ALL examinations easier to pass by I.C.S. home-study methods. A.M.Brit.I.R.E., C. & G. Telecoms., P.M.G. Cert. in Wireless, Telegraphy, Radio and TV Servicing, etc.—Write for free prospectus: International Correspondence Schools, 71, Kingsway (Dept. CL 42A), London, W.C.2. [0033

LEARN-AS-YOU-BUILD course in basic radio, electronic and electrical theory, with practical training, building a 4-valve receiver and superhet signal generator and multi-tester.—Write for free book: International Correspondence Schools, 71, Kingsway (Dept. CL42), London, W.C.2. [0350

BAKERS
'Selhurst'
RADIO

The ULTRA DE LUXE

20-20000 c/s
12"
20W
£15.15.0

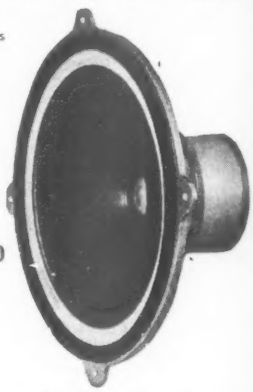

For full range listening

Sales and Demonstration offices :

JOHN LIONNET & CO.
17, CHARING CROSS ROAD,
LONDON, W.C.2. TRAfalgar 5575

GILSON TRANSFORMERS

are used in high reliability recording equipment by film studios and the B.B.C. Enquiries for prototypes and production runs are invited from electronic equipment makers.

R. F. GILSON LTD. Phone: Wimbledon 5695

St. George's Works, St. George's Road. Wimbledon, S.W.19

NEW METERS
(by well-known manufacturers)
to your requirements

7-14 DAYS
DELIVERY
A.I.D. APPROVED

IEC
METER REPAIRS
by
SPECIALISTS

Phone:
HOP 1408

Prompt and Efficient Service

INSTRUMENTS ELECTRICAL CO.
107 Newington Causeway, London, S.E.1.

XUM

NEW G.E.C., S.T.C. AND "WESTALITE" SELENIUM RECTIFIERS. Largest L.T. range in Great Britain. ONLY Makers' LATEST GOODS supplied NOT Surplus.

S.T. & C. E.H.T. K3/15, 5/-; K3/45, 9/4; K3/50, 9/10; K3/100, 16/8; all post 4d. extra.

BRIDGE CONNECTED FULLWAVE. 17 v. 1 a., 13/4; 1.5 a. 26/6; 3 a., 30/6; 4 a., 38/-; 5 a., 38/6; all post 6d. 33 v. 1 a., 22/9; 1.5 a., 45/-; 3 a. 54/-; 5 a., 68/-; all post 1/6. 54 v. 1 a., 33/-; 1.5 a. 62/-; 2 a. 74/-; 3 a. 94/-; 5 a. 97/-; 72 v. 1 a. 42/-; 1.5 a. 78/-; 2 a. 95/-; 3 a. 95/-; 5 a. 124/-; 100 v. 1 a. 61/-; 1.5 a. 112/-; 2 a. 134/-; 3 a. 134/-; 5 a. 180/-, all post 2/-.

BRIDGE CONNECTED WITH 7½in. SQUARE COOLING FINS 17 v. 6 a. 53/7; 10 a. 61/-; post 2/6.

BRIDGE CONNECTED HEAVY DUTY FUNNEL COOLED or 7½in. SQUARE COOLING FINS. Both types, same price. 17 v. 20 a. 120/-; 30 a. 172/-; 50 a. 280/-; 33 v. 6 a. 89/-; 10 a. 102/-; 20 a. 202/6; 54 v. 6 a. 124/-; 10 a. 144/-; 72 v. 6 a. 160/-; 10 a. 186/-; 100 v. 6 a. 227/6; 10 a. 270/-; all post 3/-.

"WESTALITE" (BRIDGE) 12-15 v. D.C. 0.6 a. 12/-; 1.2 a. 30/-; 2 a. 32/6; 5 a. 37/6; 1.0 a. 64/6; 20 a. 117/6; 30 a. 171/-; 50 a. 278/-; 24 v. 1.2 a. 30/-; 5 a. 60/-; 10 a. 109/6; 20 a. 208/-; 36 v. 1.2 a. 47/6; 5 a. 82/6; 10 a. 154/6; 100 v. 1.2 a. 82/6; 2.5 a. 154/6; 5 a. 195/6; 10 a. 391/-. All post extra 1/6-3/6. E.H.T. Rects. 14D.134, 25/-; 36 E.H.T. 60 35/10, post 4d. 1 ma. AC/DC meter, rects. 14/6.

"G.E.C." (BRIDGE). 6 and 12 v. D.C. 1 a. 7/6; 1.5-2 a. 8/6; 2.5 a. 11/9; 3 a. 14/9; 4-5 a. 16/6; 6 a. 23/6; 10 a. 34/-; 14 a., 42/-. 24 v. 1 a. 12/6; 1.5 a. 14/3; 2 a. 15/6; 3 a. 26/-; 4 a. 29/6; 6 a. 36/6; 10 a. 75-/; other sizes Post, under £1 add 1/- over £1 add 1/6.

Wholesale and Retail

T. W. PEARCE

66 Great Percy Street, London, W.C.1

Off Pentonville Road. Between King's Cross and Angel

TUITION

NOTHING succeeds like success! What we have done a thousand times we can do again for you—see the B.N.R.S. advt. page 122. [0172

TRAIN at home for a better position or a new hobby.—We offer comprehensive modern home tuition courses covering over 100 careers and hobbies; practical equipment supplied with many courses.—Write for free brochure, stating subject of interest, to E.M.I. Institutes, Dept. WW39, London, W.4. (Associated with H.M.V.) [0180

A.M.I.P.R.E.—for details of suitable study courses (only a limited number of students accepted), send for free syllabus of instructional text; I.P.R.E., conditions of membership booklet 1/-; "The Practical Radio Engineer," journal, sample copy 2/3; 6,000 alignment peaks for superhets, 6/-.—All post free from Secretary, I.P.R.E., 20, Fairfield Rd., London, N.8.

FREE!—Brochure giving details of home study training in radio, television and all branches of electronics; courses for the hobby enthusiast, or for those aiming at the A.M.Brit.I.R.E., City and Guilds, R.T.E.B., and other professional examinations; train with the college operated by Britain's largest electronics organisation; moderate fees.—Write to E.M.I. Institutes, Dept. WW28, London, W.4.

SOUTHAMPTON TECHNICAL COLLEGE: transfer of full-time technical courses from the University of Southampton; a two year full-time day course in Telecommunication Engineering is now available; the course prepares candidates for the Intermediate, Final and Full Technological Certificate Examinations of the City and Guilds of London Institute; it includes Physics for candidates who wish in addition to obtain full exemption from the Graduateship Examination of the British Institution of Radio Engineers; the next course commences in September, 1958; application form and further particulars may be obtained from the Registrar, Southampton Technical College, St. Mary St., Southampton. [7784

BUSINESS & PROPERTY

BUSINESS for sale. Wholesale, electrical, T.V. radio receivers, and all components. Stock and good agencies, including freehold site and building. West London.—Box. W.581, Harwood Press, West St., Harrow [7816

HOTELS AND ACCOMMODATION

RADIO SHOW. When visiting London for the Radio Show, or at any other time, stay at Hans House. Private suites comprising bedroom, sitting-room, bathroom and telephone, from 2½ gns. daily, 15 gns. weekly, for apartments and breakfasts.—Write Hans House, 16, Hans Road, London, S.W.3. Tel. Kensington 3764. [7845

NORTHERN POLYTECHNIC
SESSION 1958/9
COURSES IN APPLIED PHYSICS

DIPLOMA COURSE
in the PHYSICS AND TECHNOLOGY of ELECTRONICS.
SANDWICH COURSE leading to the Diploma in Technology (Dip.Tech.) and Graduateship of the Institute of Physics (Grad.Inst.P.).
PART-TIME COURSE leading to Graduateship of the Institute of Physics.

NATIONAL CERTIFICATES IN APPLIED PHYSICS
Ordinary National Certificate Course available to students of 16 and over.
Higher National Certificate Course available to students with O.N.C. or with suitable passes in G.C.E.
Students taking the H.N.C. course at the Northern Polytechnic can proceed to complete the College Diploma course and qualify in this way for Grad.Inst.P.

Enquiries should be addressed to the Head of the
Department of Physics,
Northern Polytechnic,
Holloway Road, London, N.7.

CLASSIFIED ADVERTISEMENTS

Use this Form for your Sales and Wants

To "Wireless World" Classified Advertisement Dept., Dorset House, Stamford Street, London, S.E.1

PLEASE INSERT THE ADVERTISEMENT INDICATED ON FORM BELOW

- **RATE : 7/- for TWO LINES. 3/- every Additional Line. Average six words per line.**
- **Name and address to be included in charge if used in advertisement.**
- **Box No. Allow two words, plus 1/-**
- **Cheques, etc., payable to Iliffe & Sons Ltd and crossed "& Co"**
- **Press Day, Thursday May 29th or July 1958 issue.**

NAME .....

ADDRESS .....

.....

			REMITTANCE VALUE.....ENCLOSED		

Please write in block letters with ball pen or pencil.

NUMBER OF INSERTIONS .....

INDEX TO ADVERTISERS

	Page
A.A. Tools	154
Abix (Metal Industries), Ltd.	42
Acoustical Mfg. Co., Ltd.	19
Adcola Products, Ltd.	4
Adler, B., & Sons (Radio), Ltd.	126
A.D.S. Relays, Ltd.	126
Advance Components, Ltd.	16
Aero Research, Ltd.	11
Alpha Radio Supply Co., The	143
Alpha Television Services (B'ham), Ltd.	162
Amphenol, Ltd.	54
Amplex Appliances (Kent), Ltd.	144
Amplivox, Ltd.	43
Andec, Ltd.	76
Anders Electronics, Ltd.	89
Antiference, Ltd.	83
Appointments Vacant ... 159, 160, 161, 162,	163
Arcolectric Switches, Ltd.	54
Ardente Acoustic Laboratories, Ltd.	50
Armstrong Wireless & Television Co., Ltd.	76, 167
Aspden, W.	168
Associated Industries, Inc.	158
Austin Motor Co., Ltd.	162
Automatic Telephone & Electric Co., Ltd.	33
Avo, Ltd.	1
Baker's "Selhurst" Radio	172
Bates Surplus Stores	151
Beamish, V.	172
Belling & Lee, Ltd.	101
Benson, W. A.	166
Berry's (Short-Wave), Ltd.	143
Bestfriend Electrical Co., Ltd.	156
Birmingham Sound Reproducers, Ltd.	104
Bradmatic, Ltd.	122
Britain, Chas. (Radio), Ltd.	121
British Communications Corporation, Ltd.	41
British Institute of Engineering Technology	153, 170
British Insulated Callender's Cables, Ltd.	Cover ii
British National Radio School	122
British Physical Laboratories	10
British Sarozai, Ltd.	163
British Thomson-Houston Co., Ltd.	52
Brookes Crystals, Ltd.	38
Brown, S. G., Ltd.	44
Bulgin, A. F., & Co., Ltd.	Edit. 301
Bullers, Ltd.	48
Burne Jones & Co., Ltd.	118
Candler System Co.	152
Cardross Engineering Co., Ltd.	154
Carr Fastener Co., Ltd.	21
Cathodeon Crystals, Ltd.	49
Central Electricity Board	162
Champion Products	170
Channel Electronic Industries, Ltd.	120
Chapman, C. T. (Reproducers), Ltd.	94
City Sale & Exchange, Ltd.	82
Clyne Radio, Ltd.	134, 135
Cosmocord, Ltd.	100
Cossor Instruments, Ltd.	77
Cottage Laboratories, Ltd.	161
Coventry Radio	152
Crane Packing, Ltd.	35
Daly (Condensers), Ltd	46
Davies, A., & Co.	170
Davis (Jack Relays), Ltd.	60
Denco (Clacton), Ltd.	58
Dependable Radio Supplies, Ltd.	153
Dependable Relay Co	39
Direct T.V. Replacements	158
Dixon, L., & Co.	158
Drayton Regulator & Instrument Co., Ltd.	116
Dubilier Condenser Co. (1925), Ltd.	97
Duke & Co.	142
Dulci Co., Ltd., The	72
Duode Natural Reproducers	166
Dynatron Radio, Ltd.	66
E. & M. Office Equipment	120
Eddy's (N'tham), Ltd.	140
E.I.R. Instruments, Ltd.	156
Electrical Instruments (H'ton), Ltd.	86
Electro-Acoustic Developments	157
Electro-Acoustic Industries, Ltd.	12
Electro-Methods, Ltd.	6
Electronic Precision Equipment	112, 113
Electronic Technical Service	56
Electronic Tubes, Ltd.	75
Electronics (Fleet Street), Ltd.	147
Electro-Winds, Ltd.	140
Elliott Bros. (London), Ltd.	160, 162
E.M.G. Handmade Gramophones, Ltd.	86
E.M.I. College	110, 116
E.M.I. Electronics, Ltd.	103
E.M.I. Institutes	106, 108, 126, 160, 162
E.M.I. Sales & Service, Ltd.	39
English Electric Co., Ltd.	8, 162, 163
English Electric Valve Co., Ltd.	55
Ferranti, Ltd.	26
Filmer, J. T.	156
Finsbury Trading Co.	171
Foyle, W. & G., Ltd.	142
Fringevision, Ltd.	155
Garrard Eng. & Mfg. Co., Ltd., The	66
G.B.C. Record Spray	82
Gee Bros., Radio, Ltd.	122, 123
General Electric Co., Ltd.	3
Gilfillan, R., & Co., Ltd.	168
Gilson, R. F., Ltd.	172
Glaser, L. & Co.	170
Goldring Manufacturing (Gt. Britain), Ltd.	51
Govt. H.Q.	162
Grampian Reproducers, Ltd.	78
Gray, Arthur, Ltd.	76
Grayshaw Instruments	124
Grey & Marten, Ltd.	118
Griffiths Hansen (Recordings), Ltd.	156
Hall Electric, Ltd.	18
Hanney, L. F.	172
Harding Electronics	158
Harmsworth, Townley & Co.	142, 156
Harris Electronics (London), Ltd.	140
Harris, P.	166
Hatter & Davis, Ltd.	169
Hayward Turbine Eng. Co. (1947), Ltd.	146
Henley's, W. T., Telegraph Works Co., Ltd.	157
Henry's (Radio), Ltd.	124, 125
Hewlett-Packard Co.	85
Hinchley Engineering Co., Ltd.	7
Hivac, Ltd.	72
Home Radio, Ltd.	152
H.P. Radio Services, Ltd.	78
Hunt, A. H. (Capacitators), Ltd.	73
Hunton, Ltd.	60
Iliffe & Sons, Ltd.	32, 84, 116, 150, 160
Instruments Electrical Co.	172
Jackson Bros. (London), Ltd.	42
Jason Motor & Electronic Co.	144
Jeffery Transformer Co.	158
Kenroy, Ltd.	154
Keyswitch Co., The	80
Kimberley Eng. Co., Ltd.	64
Kolectric, Ltd.	40
Lancashire Dynamo Holdings, Ltd.	159
Lasky's Radio, Ltd.	132, 133
Leak, H. J., & Co., Ltd.	111
Leevers-Rich Equipment, Ltd.	156
Leo Computers, Ltd.	163
Lewis Radio Co.	52, 80
Light Soldering Developments, Ltd.	166
Linear Products, Ltd.	57
Lionnet, J., & Co.	172
Lockwood & Co. (Woodworkers), Ltd.	158
London Central Radio Stores	170
Long Playing Record Library	87
L. R. Supply Co., Ltd.	115
Lyons Radio, Ltd.	155
Magnetic Devices, Ltd.	9
Mail Order Supply Co.	84
Marconi Instruments, Ltd. ... 71, 160, 161,	163
Marconi's Wireless Telegraph Co., Ltd.	105
Marine Aerials, Ltd.	88
Marriott, P. & Co., Ltd.	124
Martin, J. H.	158
McMurdo Instruments Co., Ltd. ... 31, 50,	95
Mersey Cable Works	44
Microwave Instruments	156
Midland Instrument Co.	148
Mills, W.	146
Minnesota Mining & Mfg. Co., Ltd.	115
Modern Acoustics, Ltd.	30
Modern Book Co.	87
Modern Electrics, Ltd.	87
Modern Techniques	114
M.R. Supplies, Ltd.	78
M.S.S. Recording Co., Ltd.	48
Mullard, Ltd. ... 3, 15, 36, 37,	98
Multicore Solders, Ltd.	Cover iv
Multitone Electric Co., Ltd.	59
Murex, Ltd.	80
Neuclex Co., Ltd.	158
Newmarket Transistors, Ltd.	65
Newnes, George, Ltd.	32a, 32b
Northern Polytechnic	163, 173
Northern Radio and T.V.	156
Northern Radio Services	70
Nottingham Transformer Service	168
Oddie, Bradbury & Cull, Ltd.	154
Oryx Electrical Laboratories, Ltd.	88
Osmor Radio Products, Ltd.	152
Oxley Developments Co.	157
Parker, A. B.	146
Partridge Transformers, Ltd.	165
P.C.A. Radio	117
P.C. Radio	117
Pearce, T. W.	173
Pearson, M. & J.	156
Planet Instrument Co.	154
Plasticable, Ltd.	142
Plessey Co., Ltd. ... 38, 53,	79
Plessey Electronics, Ltd.	28
Post Radio Supplies	157
Premier Radio Co. ... 92, 93,	94
Preston, A., & Sons	150
Proops Bros., Ltd. ... 130,	131
Pye, Ltd.	34
Pye Telecommunications, Ltd.	96
Quartz Crystal Co., Ltd.	168
Radar & Electronic Equipment, Ltd.	74
Radio & T.V. Components (Acton), Ltd.	146
Radio Clearance, Ltd.	141
Radio Component Specialists	119
Radio Exchange Co., The	149
Radio Experimental Products Co.	157
Radio Ham Shack, Ltd.	144
Radio Resistor, Ltd.	17
Radio Servicing Co.	62
Radio Supply Co. (Leeds), Ltd. ... 128,	129
Radio Traders, Ltd.	149
Radiospares, Ltd.	115
Rank Cintel, Ltd.	5, 24
Record Housing	148
Redifon, Ltd.	30, 91
Relda Radio, Ltd.	145
Reliance Manufacturing Co., Ltd.	56
Reproducers & Amplifiers, Ltd.	23
Roe, A. V., Ltd.	160
Rogers Development (Electronics), Ltd.	68
Rollett, H., & Co., Ltd.	158
Salford Electrical Instruments, Ltd.	81
Salon de la Pièce détachée	114
Samsons Surplus Stores ... 144,	155
Sangamo-Weston, Ltd.	110
Savage Transformers, Ltd.	169
Semiconductors, Ltd.	25
Service Trading Co.	127
Servo & Electronic Sales, Ltd.	160
Servomex Controls, Ltd.	69
Sherbourne Television Service	158
Siemens Edison-Swan, Ltd. ... 102,	107, 162
Sifam Electrical Instrument Co., Ltd.	158
Simmonds, L. E., Ltd.	84
Simon Sound Service, Ltd.	63
Skymasts	157
Smith, G. W. (Radio), Ltd. ... 138,	139
Smith, H. L., & Co., Ltd.	167
Solartron Electronic Group, Ltd.	2
Sonomag, Ltd.	120
Sound News Productions	168
Southern Radio Supply, Ltd.	156
Southern Technical Supplies	156
Specialist Switches	74
Spencer-West, Ltd.	172
Sperry Gyroscope Co., Ltd.	13
Stamford, A. P.	171
Standard Telephones & Cables, Ltd. 14,	99
Stern Radio, Ltd. ... 136,	137
Stewart Transformers, Ltd.	74
Stratton & Co., Ltd.	61
Sugden, A. R., & Co. (Engineers), Ltd.	46
Surrey Steel Components	86
Sutton Coldfield Electrical Engineers	114
Tannoy Products, Ltd.	158
Taylor Electrical, Ltd.	58
Technical Trading Co.	149
Tele-accessories (Mfg.) Co.	153
Telefusion (Eng.), Ltd.	95
Telegraph Condenser Co., Ltd. ... Cover	iii
Telegraph Construction & Maintenance Co., Ltd.	62
Teleequipment, Ltd.	45
Tele-Radio (1943), Ltd.	153
Teletron Co., The	170
Texas Instruments, Ltd.	20
Trix Electrical Co., Ltd. ... Edit.	299
T.R.S. Radio	148
Universal Book Co.	157
Universal Electronics	151
Usine Hétallurgique Doloise	47
Vacwell Engineering Co., Ltd.	159
Valradio, Ltd.	82
Verdik Sales, Ltd.	158
V.E.S. Wholesale Services, Ltd.	140
Vickers-Armstrong, Ltd.	161
Vitavox, Ltd.	27
Vortexion, Ltd.	109
V.Z. Electrical Service	154
Walmore Electronics, Ltd.	118
Watts, Cecil E.	152
Wayne Kerr Laboratories, Ltd., The	22
Webber, R. A., Ltd.	155
Webb's Radio	154
Westwood, L.	155
Weymouth Radio Mfg. Co., Ltd., The	70
Wharfedale Wireless Works ... 64,	94
White, S. S., Co. of Gt. Britain, Ltd., The	29
Wilkinson, L. (Croydon), Ltd.	150
Wilson, Ronald & Co., Ltd.	154
Wright & Weaire, Ltd.	68
Young, C. H.	152
Z. & I. Aero Services, Ltd.	164

Printed in Great Britain for the Publishers, ILIFFE & SONS LTD., Dorset House, Stamford St., London, S.E.1, by CORNWALL PRESS LTD., Paris Garden, London, S.E.1. *Wireless World* can be obtained abroad from the following: AUSTRALIA and NEW ZEALAND: Gordon & Gotch, Ltd. INDIA: A. H. Wheeler & Co. CANADA: The Wm. Dawson Subscription Service, Ltd.; Gordon & Gotch, Ltd. SOUTH AFRICA: Central News Agency, Ltd., William Dawson & Sons (S.A.), Ltd. UNITED STATES: Eastern News Co., 308 West 11th Street, New York 14.

Page
92, 93, 94
150
130, 131
34
96
168
74
Ltd. 146
141
119
149
157
144
17
62
128, 129
149
115
5, 24
148
30, 91
145
56
23
160
td .. 68
158
81
114
144, 155
110
169
25
127
160
69
158
02, 107, 162
Ltd. .. 158
84
63
157
138, 139
167
2
120
168
156
156
74
172
13
171
Ltd. 14, 99
136, 137
74
61
s), Ltd. 46
86
ers 114
158
58
149
153
95
Cover iii
ntenance
62
45
153
170
20
Edit. 299
148
157
151
47
158
82
158
140
161
27
109
154
118
152
The .. 22
155
154
155
, The .. 70
64, 94
in, Ltd.
29
150
154
68
152
164

, S.E.1. *Wireless*
son Subscription
West 11th Street,

XUM

XUM

T.C.C. TEST INSTRUMENTS

PLASTIC FILM DECADE CONDENSER

Requirements for more accurate measurements and the demand for standard condensers with very high insulation resistance and excellent power factor have created a need for this new product. It is particularly useful in research and development work on computors and integrator circuitry and low level A.C. amplifiers. Stability of capacity and constancy of power factor as a function of frequency also make it extremely useful in measuring circuits, and as a component in filters and tuned circuits.

Condenser elements are non-inductively wound and heat cycled and so stabilized. The plastic film is specially purified high-molecular weight polystyrene, having high IR and freedom from polarization.

New, very low capacity switches, together with high-grade moulded polythene terminations ensure high performance under the most stringent conditions.

The 0.001 μF decade employs ten separate condenser units, while the two larger decades are made up of four units whose capacities are in the ratio of 1:2:3:4 being connected in parallel combinations;

PRICE £52 (*strictly nett*)

Write for leaflet

Features: High insulation resistance; low dielectric absorption; capacity and power factor vary only slightly over wide frequency range; excellent long-time stability.

Capacity Range: 0.001 μF to 1.11 μF in steps of 0.001 μF. The three decades are in steps of 0.001, 0.01 and 0.1 μF.

Working Voltage: 350v. D.C. **Test Voltage:** 700v. D.C.

Accuracy: Better than ± 1% at 20°C at 1 k/Cs. Decades with closer tolerance can be produced if required.

Power Factor: Better than 0.0005 in the audio-frequency range.

Insulation Resistance: Better than 500,000 MΩ, at 350 volts at 20°C.

REFORMING & LEAKAGE TESTER

An electrolytic condenser which has been in store (or out of use) for six months or more will initially pass a high leakage current when its working voltage is applied. This Test Instrument has been produced to make possible the reforming of such condensers to their normal value. It can also be used for leakage measurements.

Specification

Mains input: 110, 220, 230, 240V at 50/60 cycles.
Output: 2 Voltage Ranges, 0-100V, 0-700V.
Current rating: 100 mA. D.C.
The voltages are continuously variable over both ranges, with a voltmeter calibrated 0-100V D.C. and a second range 0-1 kV. D.C.
Current meter: with 3 ranges: 0-1 mA D.C., 0-10 mA D.C., 0-100 mA D.C.

PRICE £65 (*strictly nett*)

CONDENSER SPECIALISTS SINCE 1906

XUM

British made SAVBIT now helps U.S.A. manufacturers

* Below is part of an advertisement from the U.S.A. "Electronics"

Now ready!

SAVBIT®

A SPECIAL ALLOY AVAILABLE ONLY IN **ERSIN**

Multicore FIVE-CORE SOLDER

Simplified Explanation:

	Before Soldering	During Soldering	After Soldering
In soldering with straight tin/lead alloys...	Tin/Lead Solder — Copper Tip. Solder contacted by copper tip...	Molten Tin/Lead/Copper — Copper Tip. absorbs tip metal to saturation...	Tin/Lead/Copper Joint — Copper Tip. and wears out tip rapidly!
Whereas... In soldering with new SAVBIT ALLOY...	Tin/Lead/Copper Solder — Copper Tip. Copper-saturated SAVBIT solder...	Molten Tin/Lead/Copper — Copper Tip. cannot borrow copper from the iron...	Tin/Lead/Copper Joint — Copper Tip. which receives hardly any wear.

THIS EXPLAINS HOW SAVBIT ALLOY STOPS THE WEARING OUT OF COPPER TIPS

Two years ago, Multicore introduced a special alloy for soldering silver-plated ceramics, containing a 2% silver content, so that it would not absorb silver from the ceramic. The same patented principle has now been applied to prevent the copper of soldering iron tips being absorbed into solder alloys! Until now, incorporation of copper in a solder alloy to more than 0.3% of the tin content was discouraged, since it was believed that copper might slow the flow of solder in making seams. An extensive investigation under actual working conditions on television assembly lines has now proven that a copper-loaded alloy does not affect the speed of soldering, when making the joints which form 98% of the soldering processes in the assembly and manufacture of all electronic equipment.

WEAR OF COPPER TIPS

Most engineers have presumed that the wear of copper soldering iron tips used on assembly lines was caused by (1) oxidation of the copper due to heat, (2) attack of the flux on the copper bit, and (3) absorption of the copper from the tip into the tin of the solder alloy. However, these investigations have proven conclusively that reasons (1) and (2) are not the explanation.

On the other hand, comparative tests between Ersin Multicore Solder with the new SAVBIT copper-loaded alloy, and solders containing pure tin/lead alloys have indicated that a reduction of about 9/10 in tip wear can be achieved by the use of SAVBIT ALLOY! It is a fact that the tip of an iron which needs resurfacing after 1,000 joints with normal tin/lead alloys can last for 10,000 or more similar joints before requiring resurfacing, using Ersin Multicore SAVBIT ALLOY. (See illustration.) Therefore, it is hardly necessary to emphasize the great economies that can be effected in soldering iron maintenance by using this new alloy. Equally important, a higher standard of soldering is guaranteed throughout the life of the iron, because it stays in first class condition much longer!

CHARACTERISTICS AND SPECIFICATIONS

SAVBIT ALLOY is now available in Ersin Multicore 5-core solder, containing non-corrosive extra-fast Ersin Flux, in 14, 16 and 18 gauge.

MELTING POINT: Virtually the same as standard tin/lead alloys.

ELECTRICAL CONDUCTIVITY, TENSILE AND SHEAR STRENGTH: No appreciable difference between SAVBIT and normal tin/lead alloys. Strength of SAVBIT slightly greater.

IMPORTANT

SAVBIT is one of a number of alloys developed for the Industry by Multicore. In addition to SAVBIT, Ersin Multicore, the world's finest cored solder, is also available in all the standard tin/lead alloys and diameters, in 1 lb. cartons and 7 lb. reels. Multicore contains 5 cores of exclusive, high speed, non-corrosive Ersin Flux. This great solder, so widely-imitated, has never been equalled for speed of operation, effective prevention of rejects and, in the long run, lowest cost for superior results.

B.I.C. ENDORSED QUALITY

SAVBIT ALLOY has been impressively proven on the assembly lines of England's greatest manufacturers. We will be pleased to furnish testimonials.

Address U S A inquiries on company letterhead to Dept MS167

MULTICORE SALES CORPORATION

PORT WASHINGTON, N. Y.

Canadian Inquiries: CHARLES W. POINTON LTD. 6 Alcina Ave., Toronto, Canada

Inquiries regarding other territories: MULTICORE SOLDERS LTD. Hemel Hempstead Herts., England

SAVBIT FOR FACTORIES

Available on 7 lb. and 1 lb. reels in 14, 16 and 18 s.w.g. Bulk prices on application. Please write for Technical Information.

SAVBIT FOR SERVICE ENGINEERS

Approx. 170 ft. of 18 s.w.g. on a reel. Packed in a carton.

15/- each (subject)

Cat. Ref. R18SAV.

SAVBIT CARTONS

5/- each (subject)

Cat. Ref.	S.W.G.	App. L'gth.
CI SAV 14	14	20 ft.
CI SAV 16	16	30 ft.
CI SAV 18	18	53 ft.

Bib WIRE STRIPPER AND CUTTER

3/6 each (subject).

Bib RECORDING TAPE SPLICER

For the professional and amateur recording enthusiasts.

18/6 each (subject).

MULTICORE SOLDERS LTD., MULTICORE WORKS, HEMEL HEMPSTEAD, HERTS. (BOXMOOR 3636)

XUM

W
RS

IRE
PER
TTER
ubject).

R 3636)

XUM